
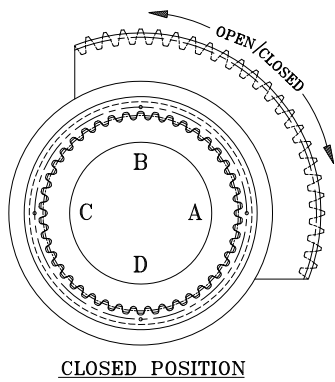
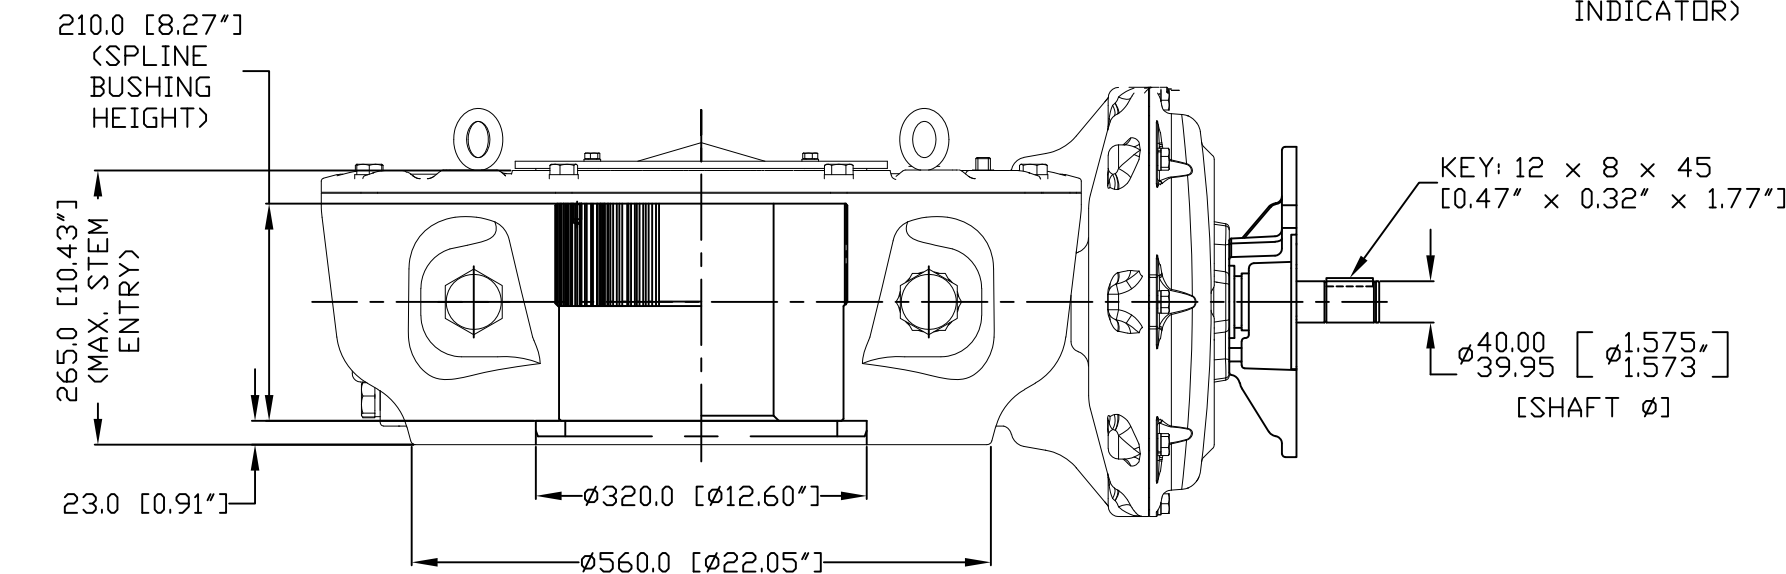


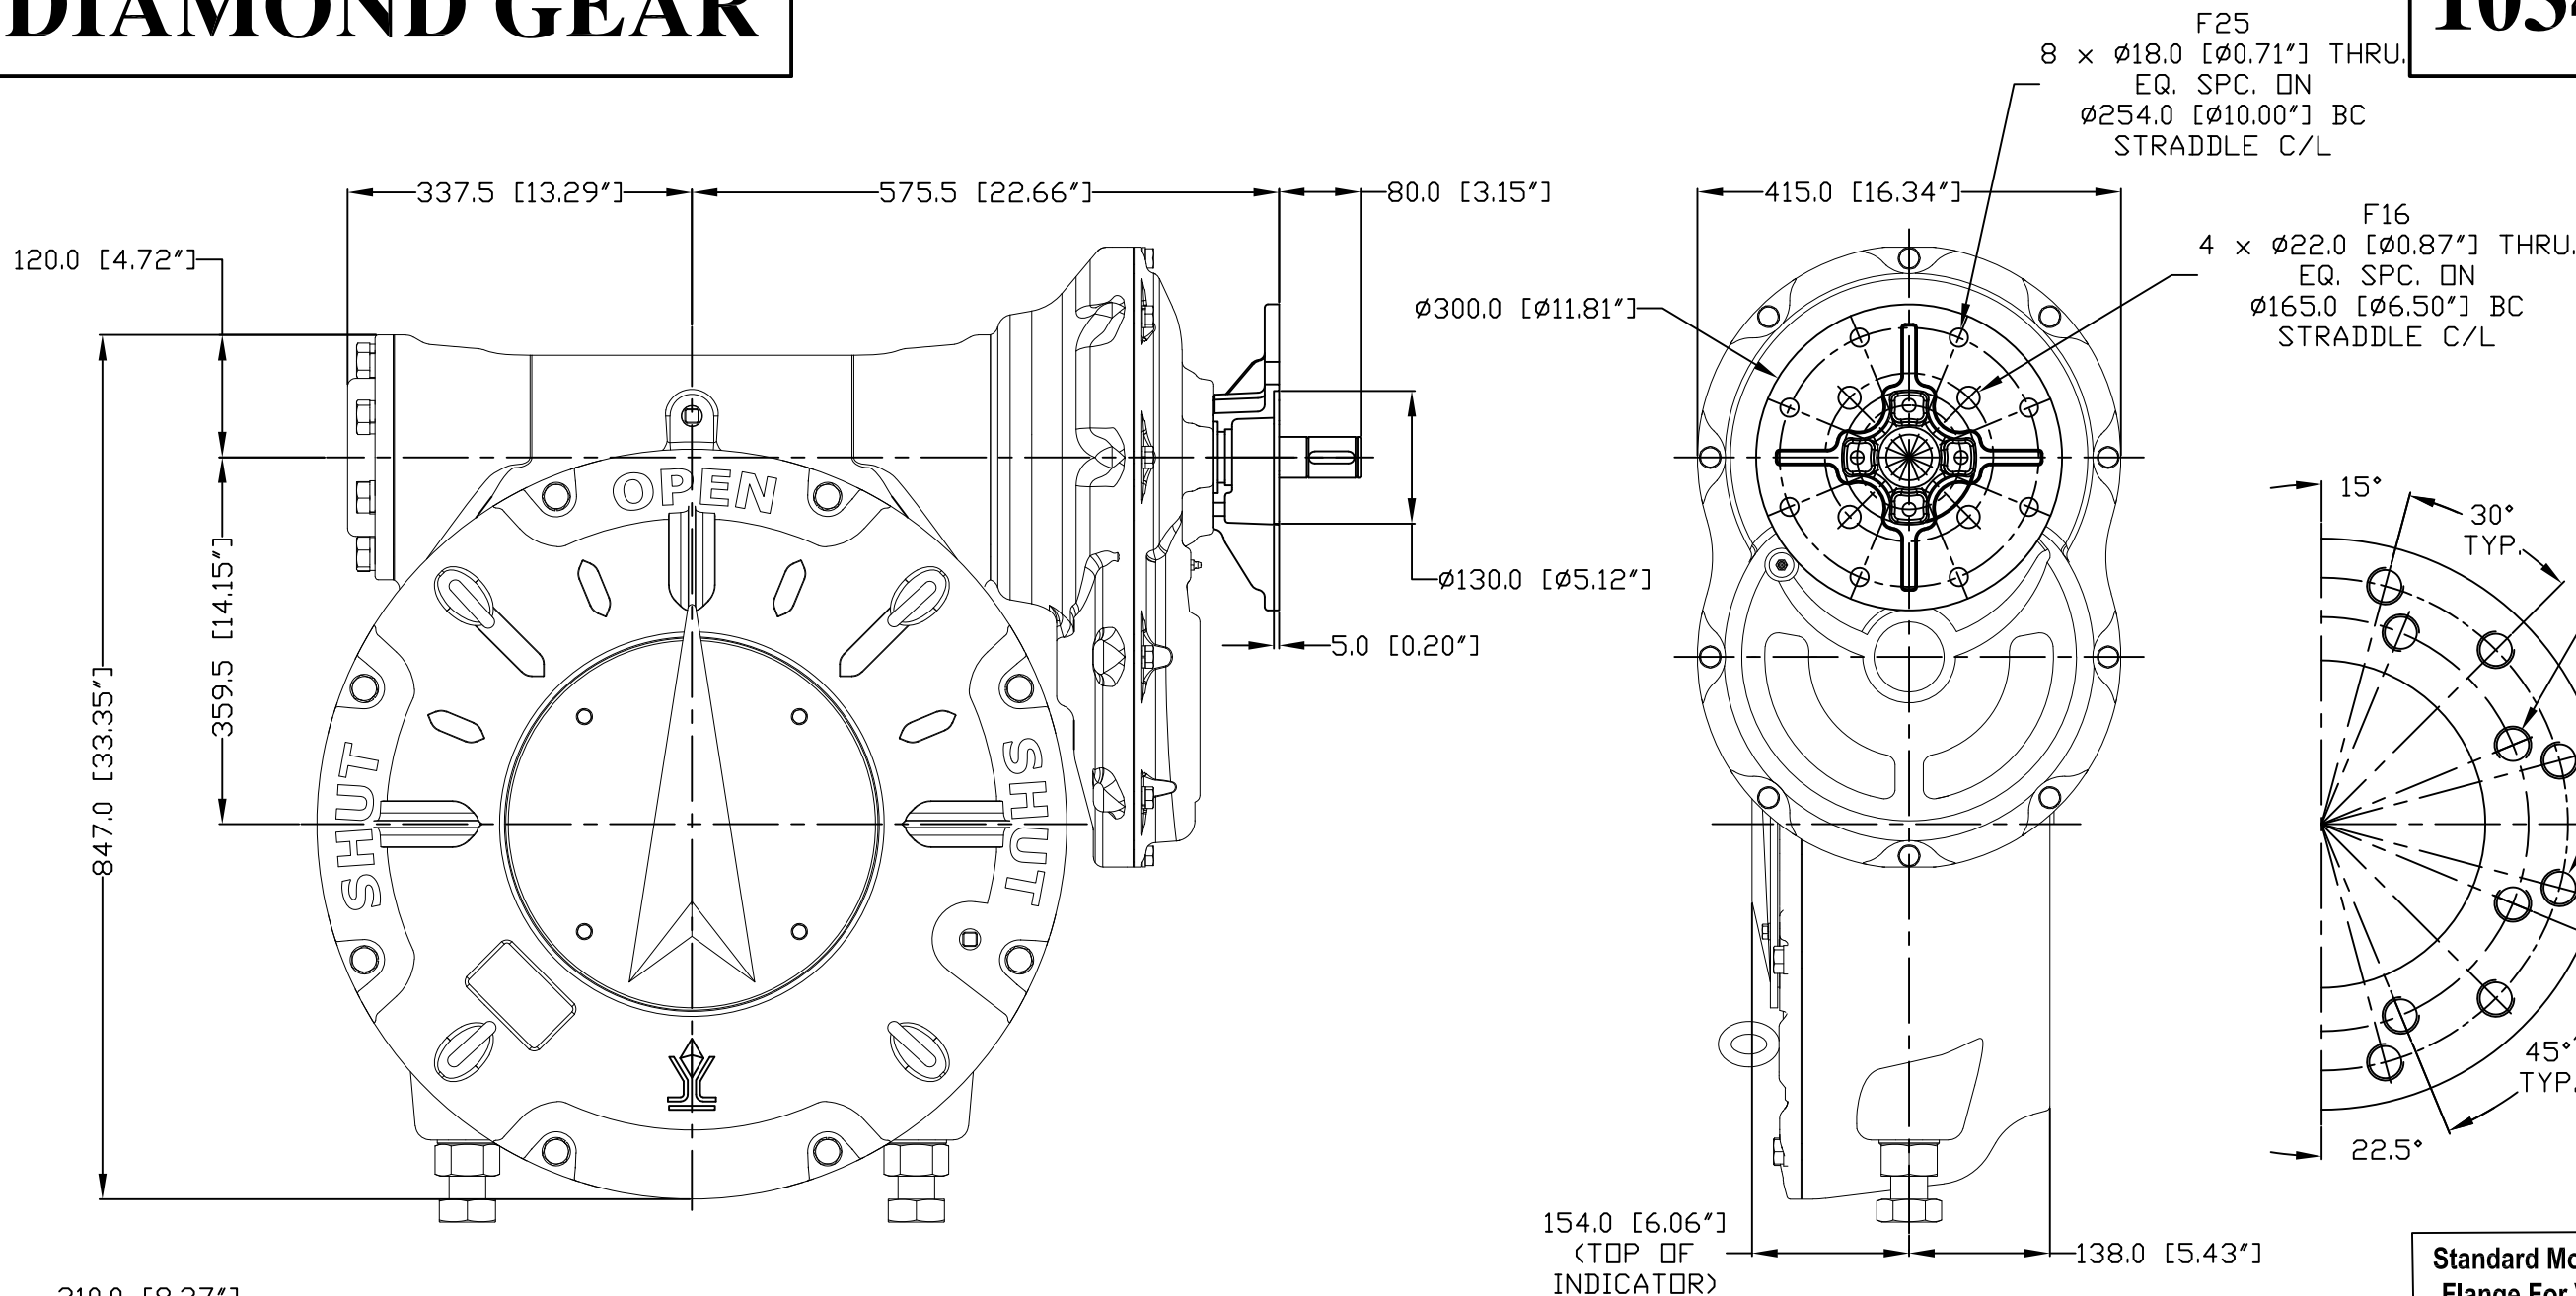

Standard Mounting Flange For Valve	MSS FA40 & FA48
---------------------------------------	--------------------

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
40"	125

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
1,034,437	2,462	1550:1	420.1	±20°	387.5	1,157	Ø8.0" Key: 2.0" x 1-1/2"	6-11/16"	FA40 & FA48



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921254A	12/17/19
----------	----------

REV.A