


DIAMOND GEAR

12BG3.75

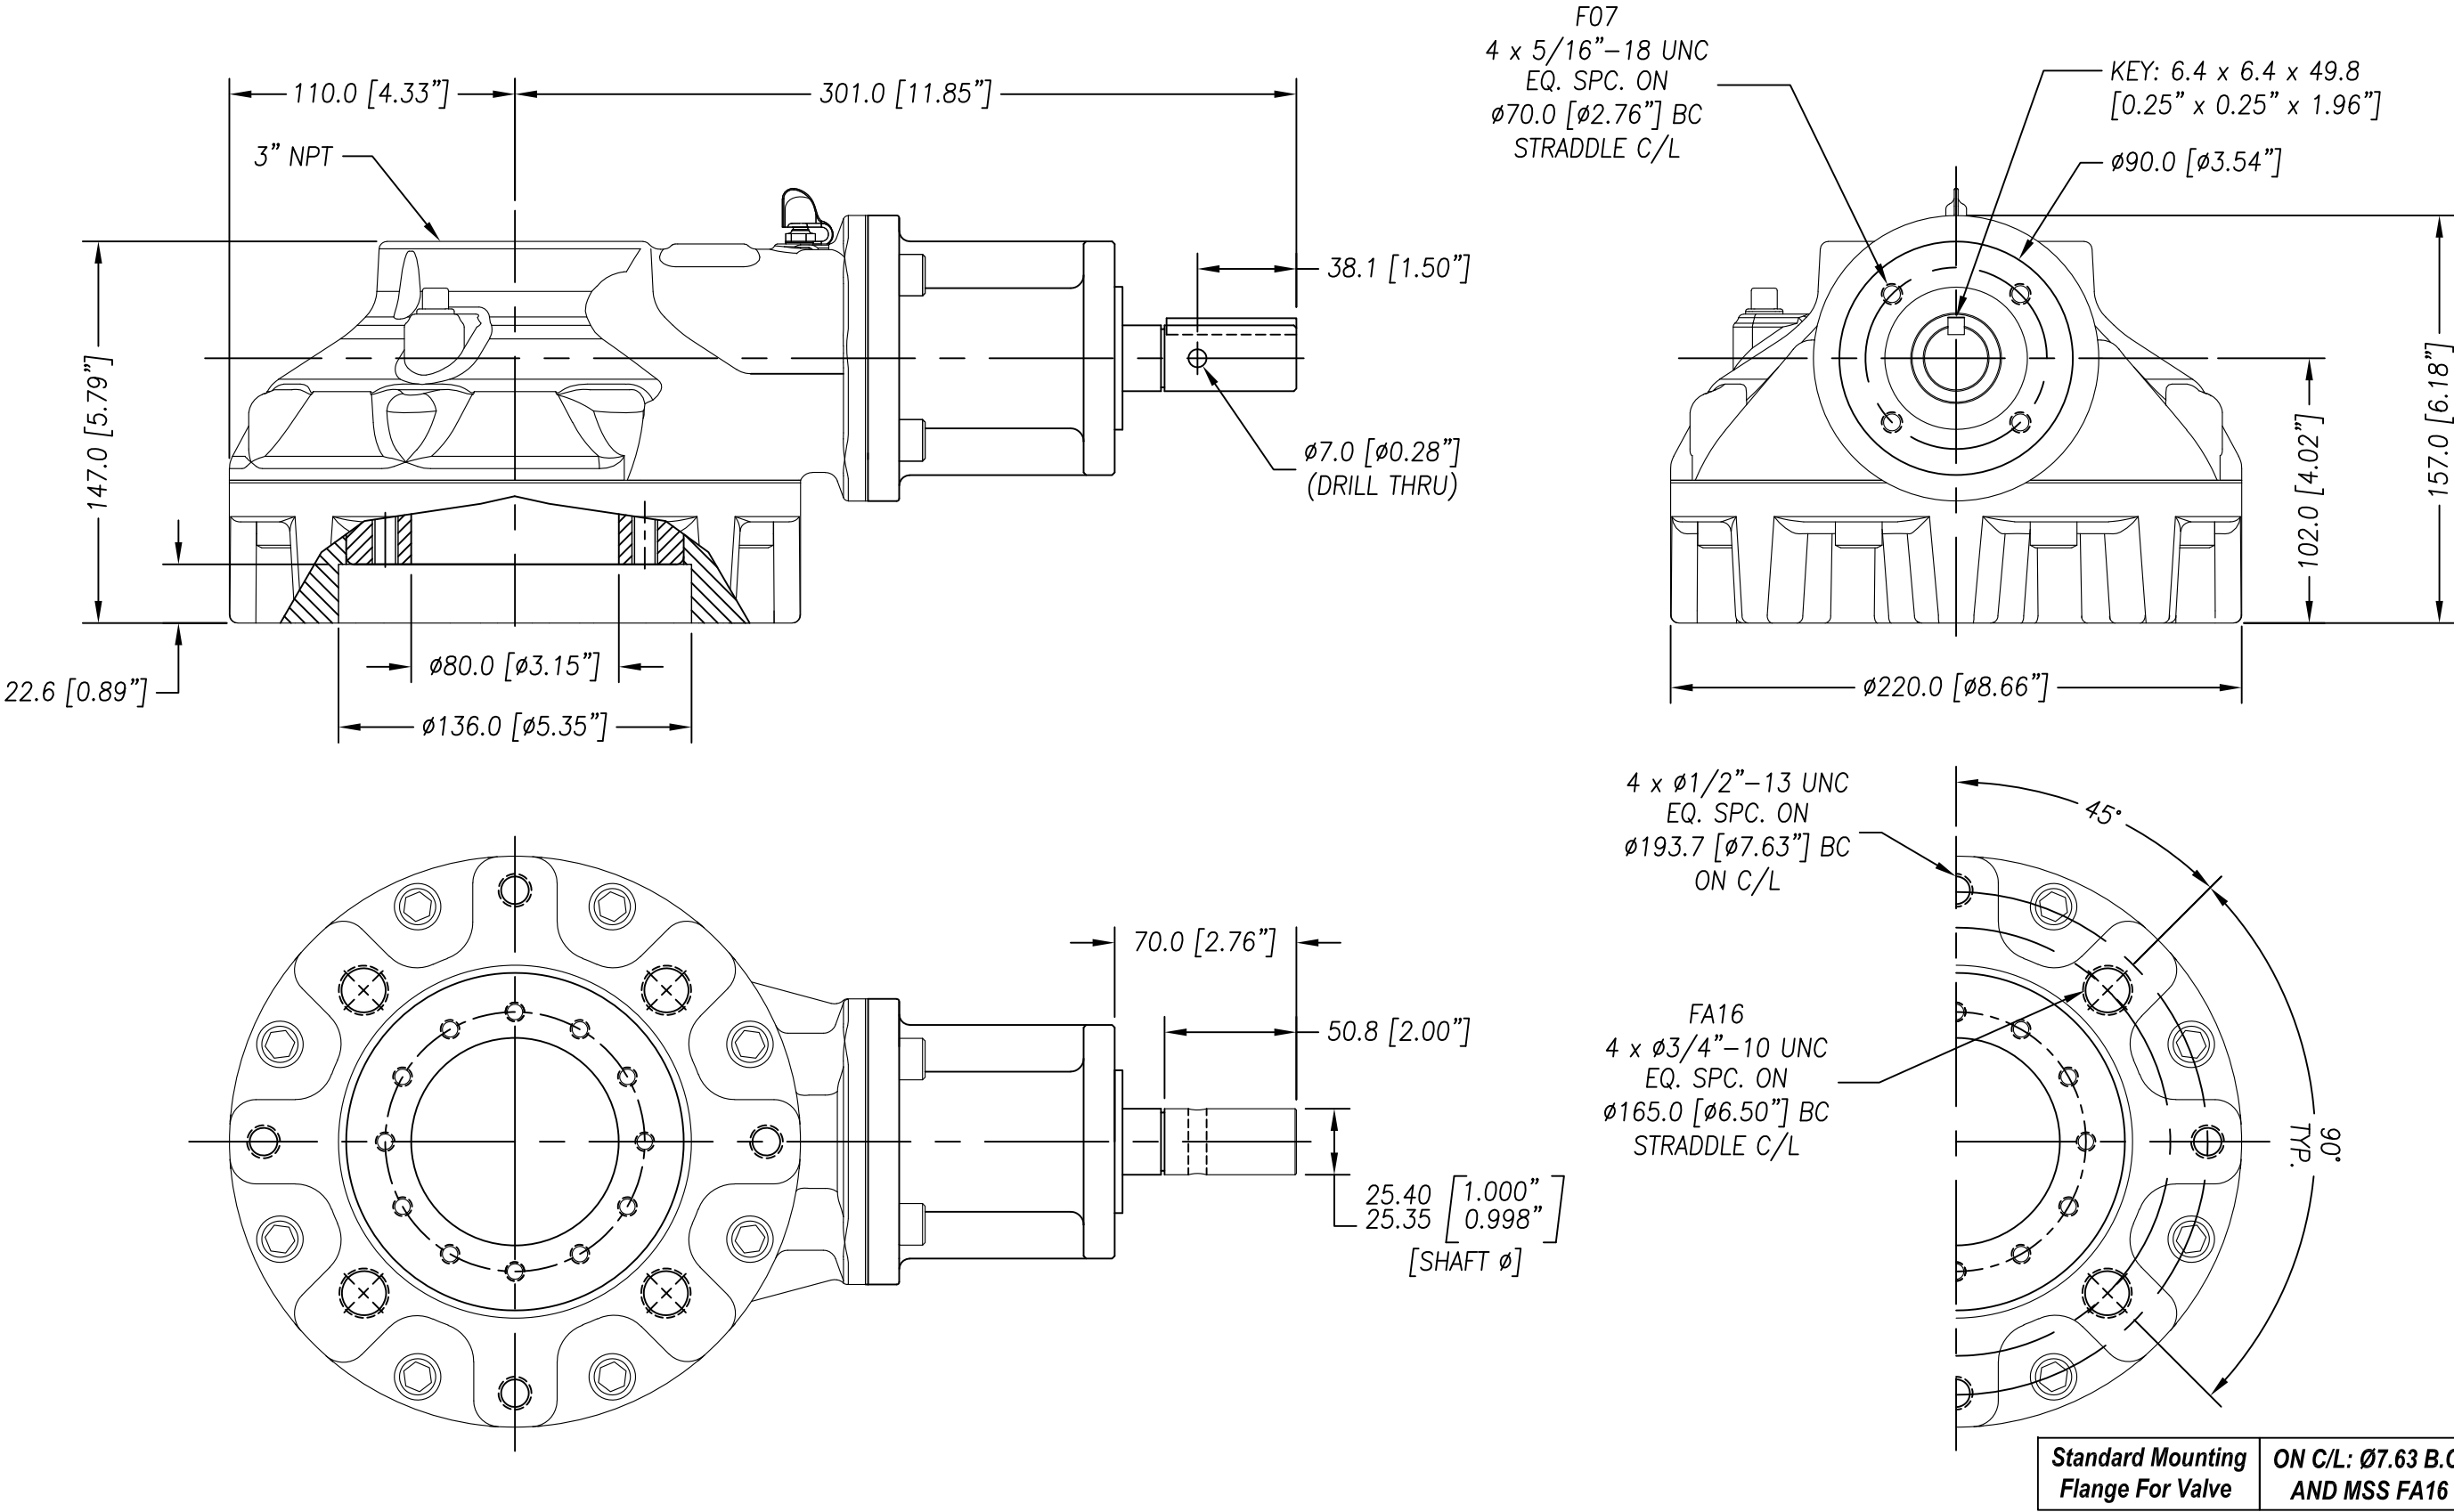

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [FT.LB]	MAX. INPUT TORQUE [FT.LB]	RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	DRIVE PATTERN [IN.]	INPUT SHAFT PATTERN	MAX. STEM DIAMETER FOR TORQUE APPLICATION [IN.]	STANDARD MOUNTING ON C/L OR STRADDLE C/L
1,250	370	3.75:1	3.38	50,000	50	12x3/8"-16UNC ON $\phi 3.937$ " B.C.	F07	$\phi 2.625$	ON C/L: 4x1/2"-13 UNC $\phi 7.63$ " B.C. STRADDLE C/L: FA16

REV.H

C400003A

10/28/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

