


DIAMOND GEAR

147DW474

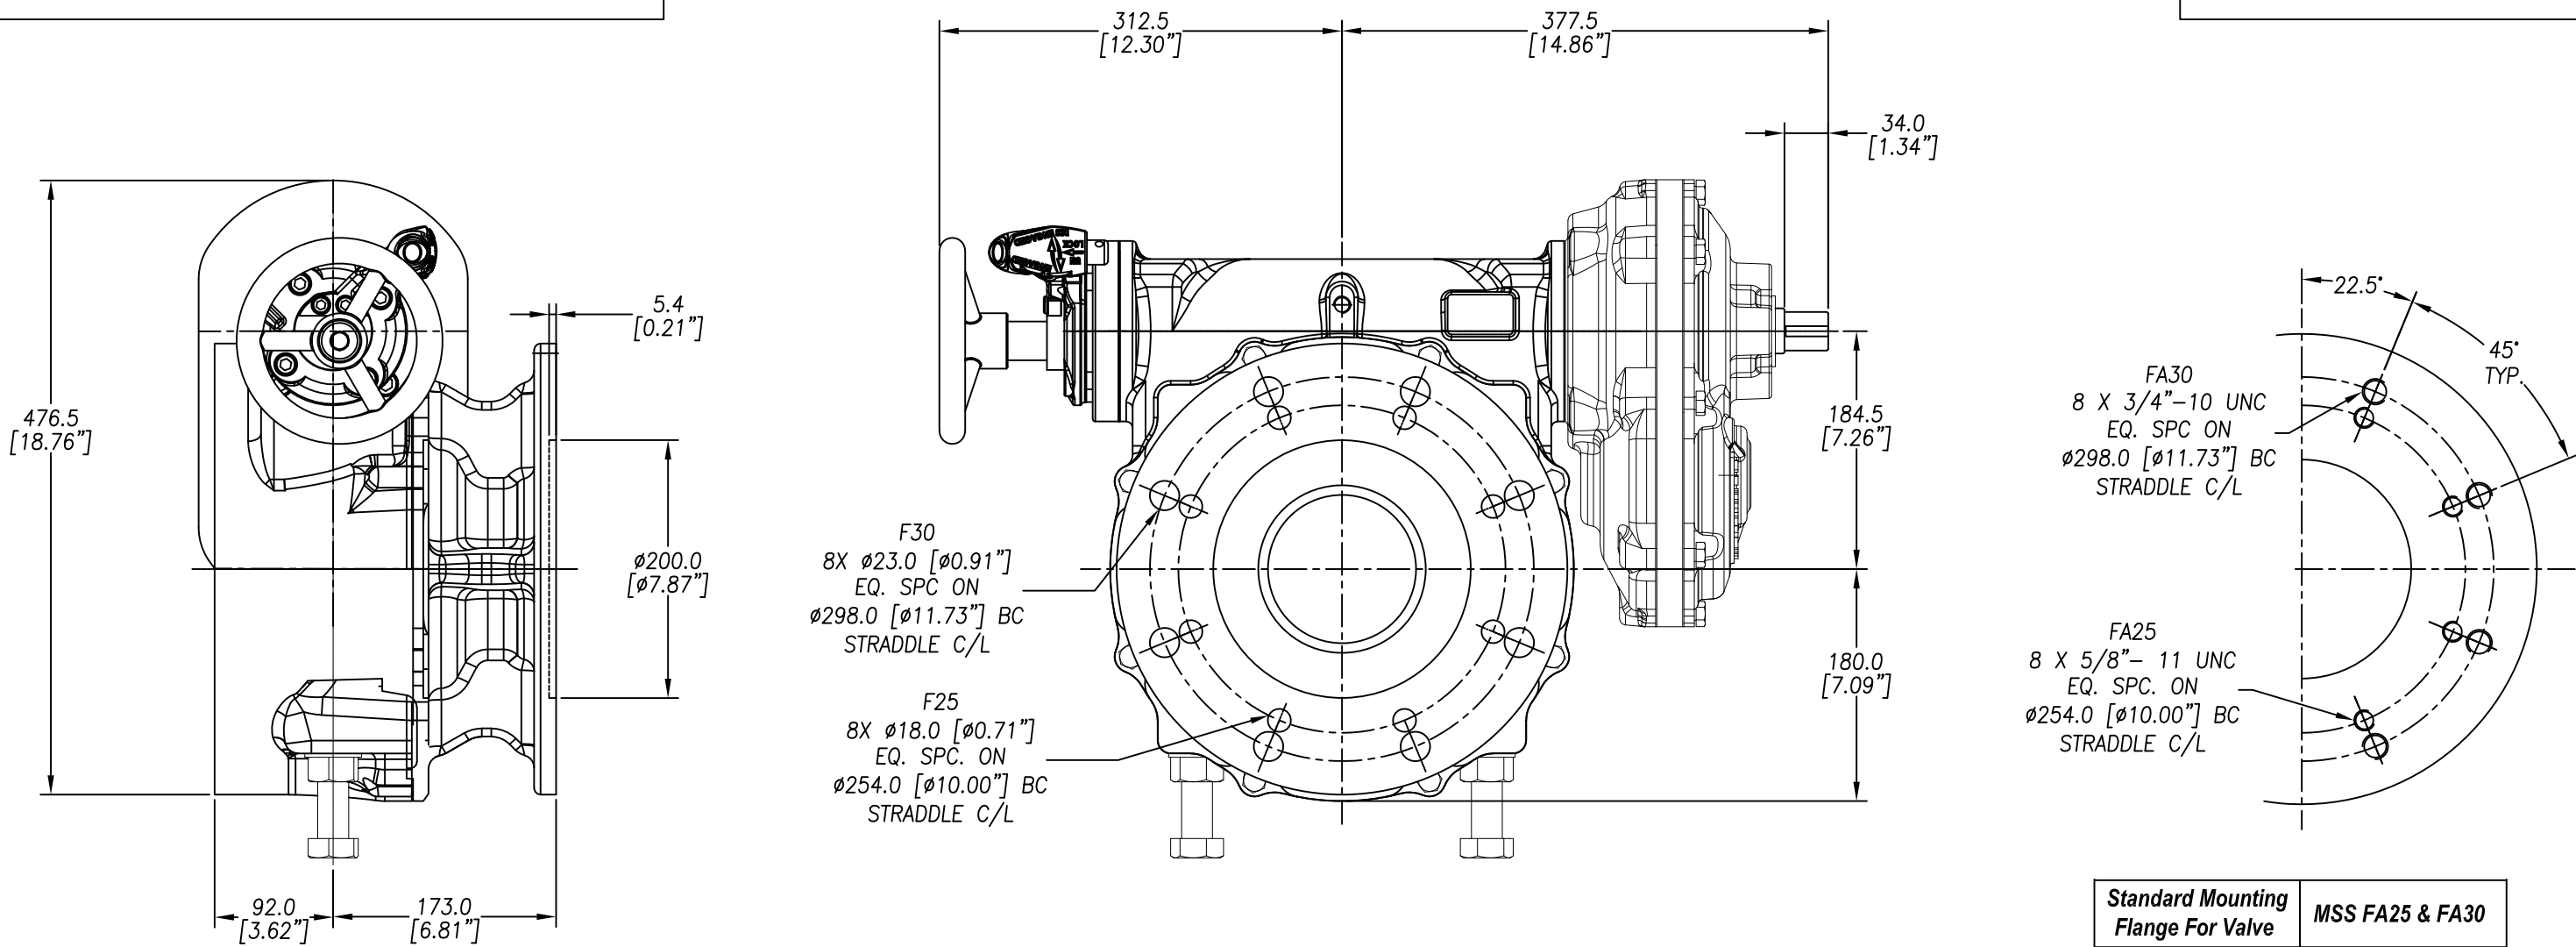

Standard Mounting
Flange For Valve

MSS FA25 & FA30

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
147,364	1,147	474:1	128.4	±20°	118.5	280	4-3/8" Key: 1" x 3/4"	3-5/8"	F25 & F30	FA25 & FA30

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
28"	82

REV.0

C921236A

9/16/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

