


DIAMOND GEAR

154BG30.2

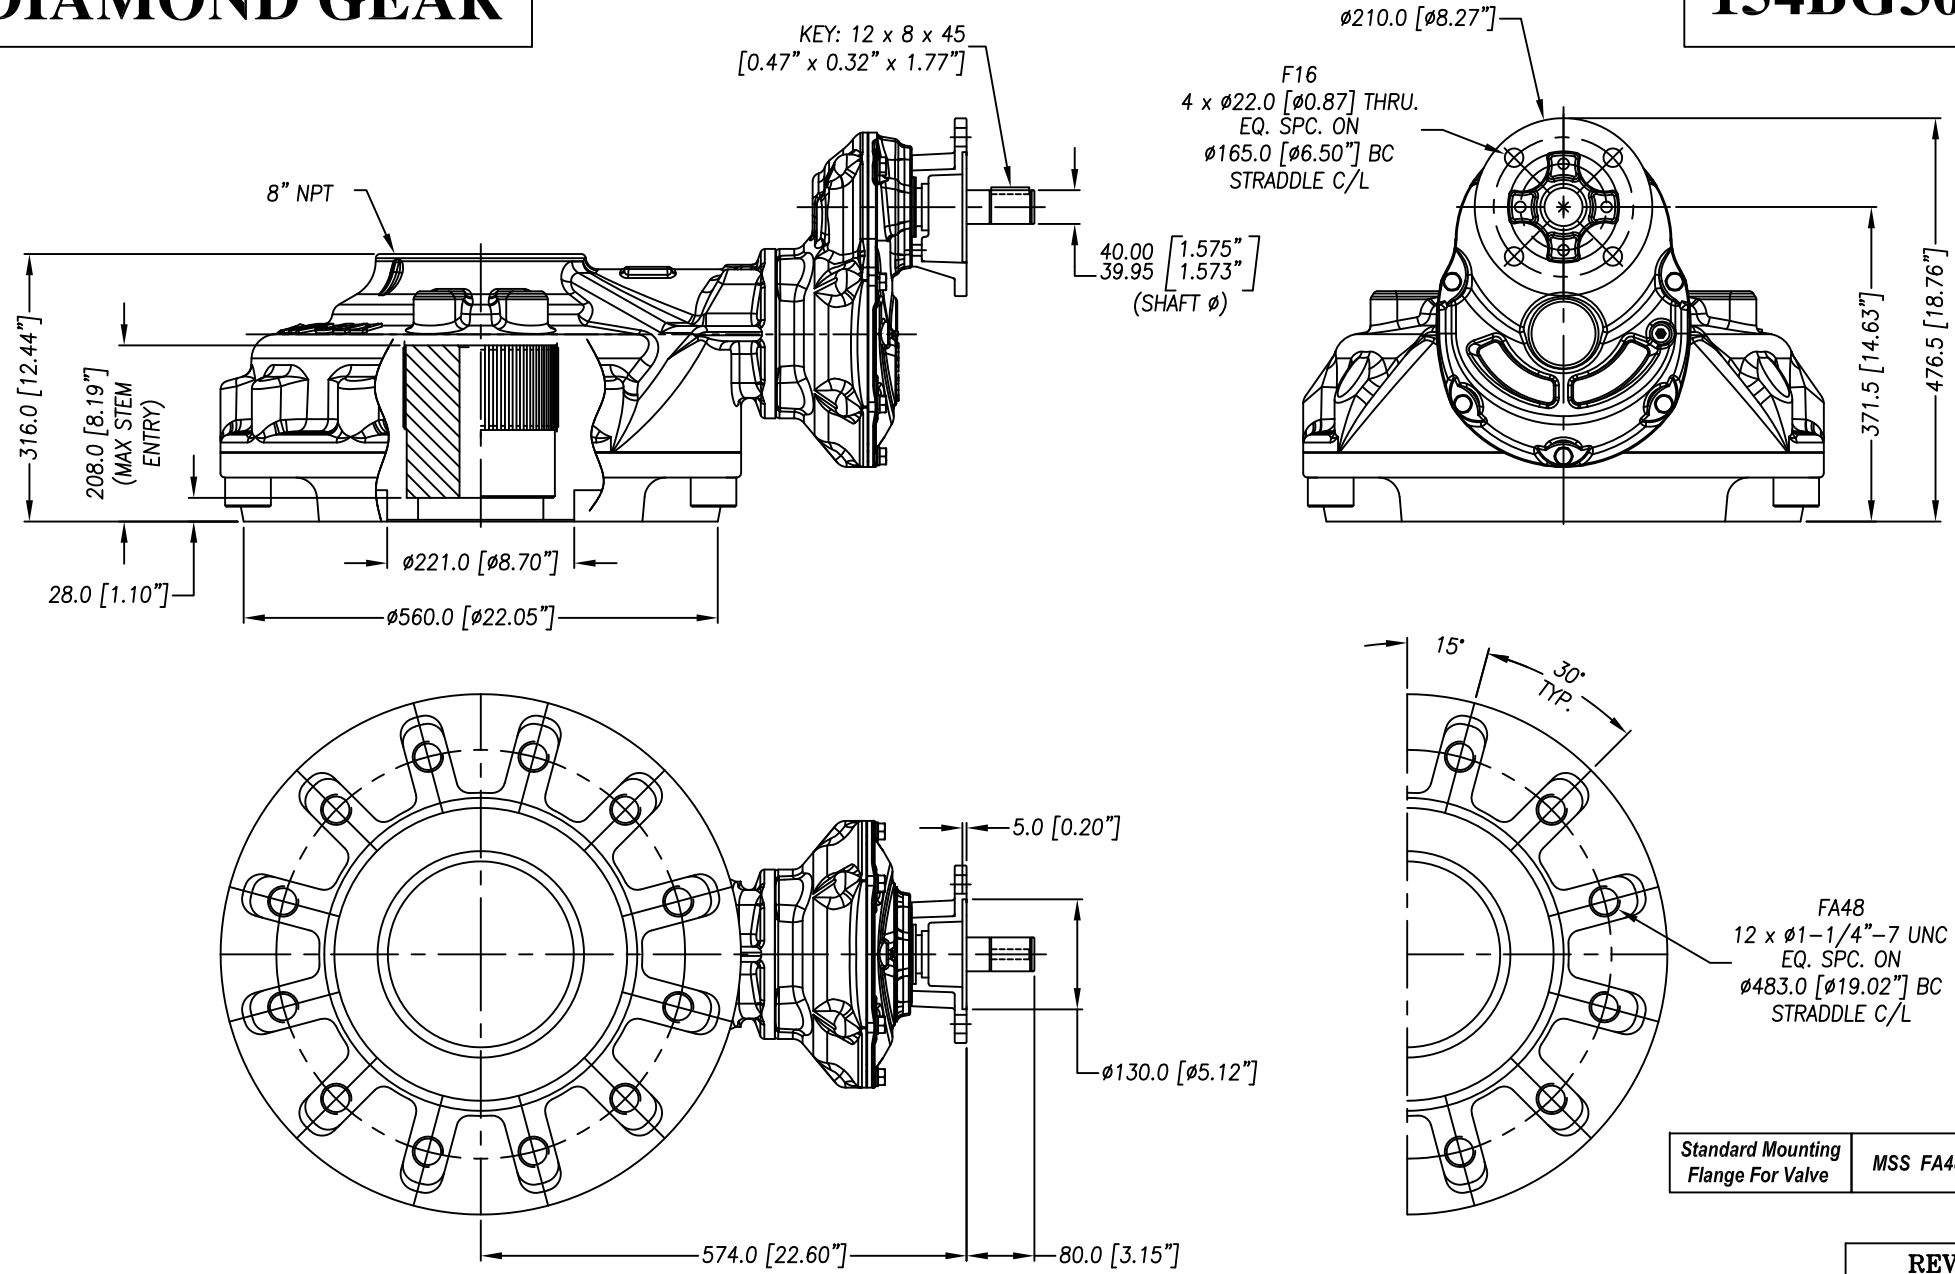

UNITS: MM [Inches]

MAX. OUTPUT TORQUE		MAX. INPUT TORQUE		RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	MAX ROUND BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
[FT.LB]	[IN.LB]	[FT.LB]	[IN.LB]						
12,836	154,032	241	6,112	30.2:1	25.2	270,974	1,027	Ø4-1/2" KEY: 1" X 3/4"	FA48

Standard Mounting Flange For Valve MSS FA48

C921271A REV.0 10/28/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

