
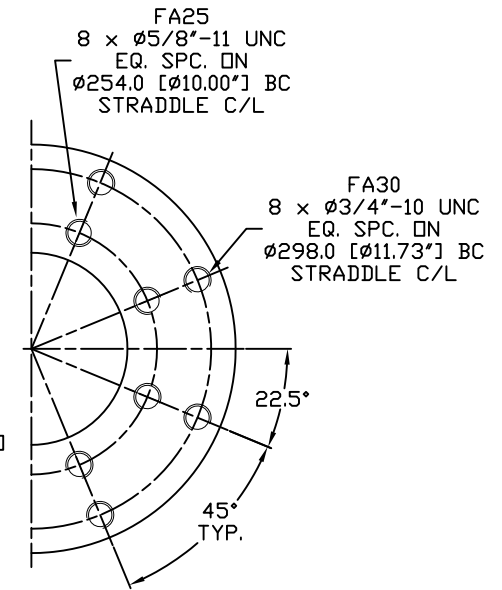




DIAMOND GEAR

165W G180

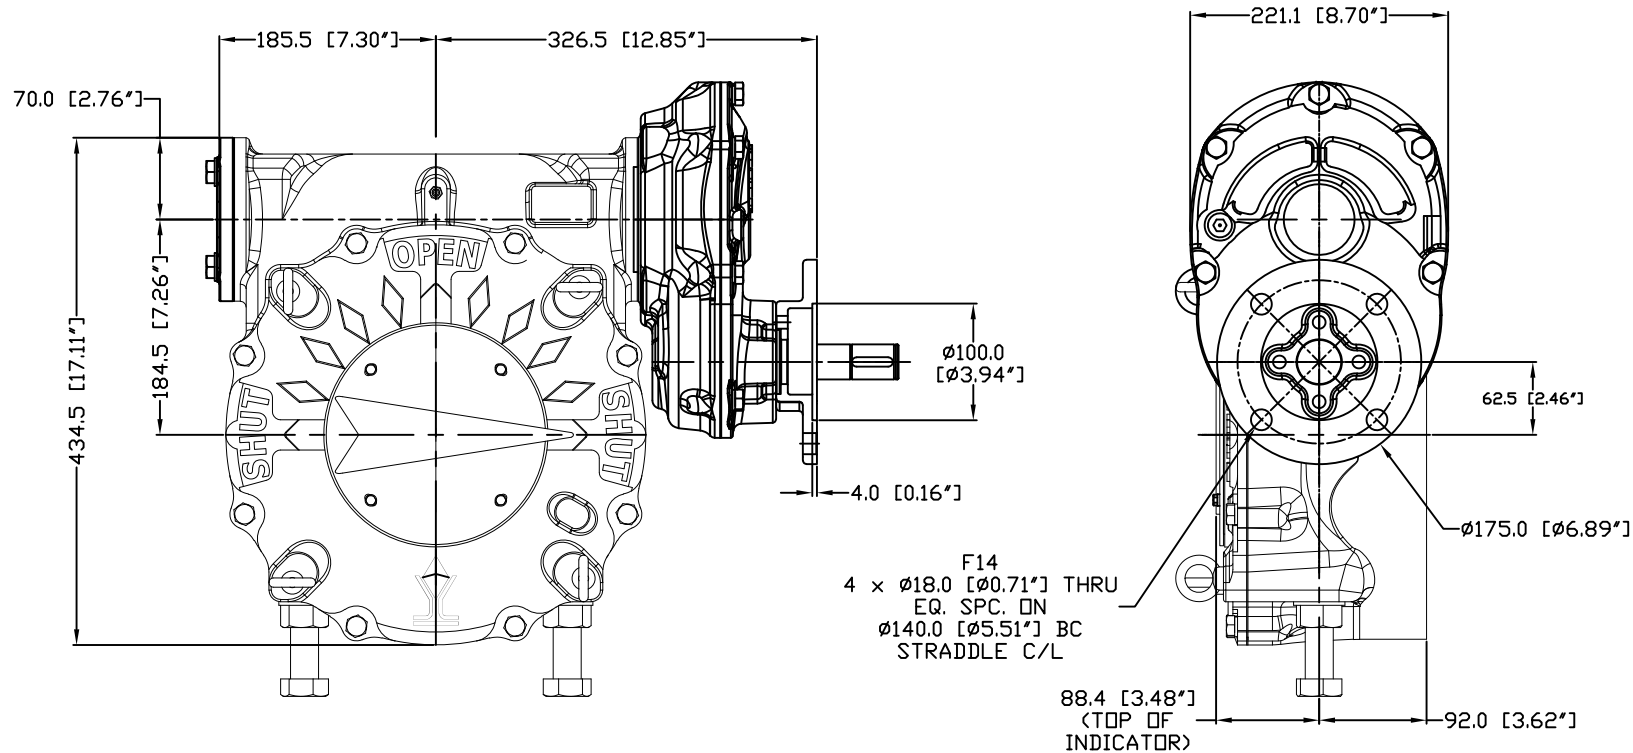

Standard Mounting Flange For Valve

MSS
FA25 & FA30

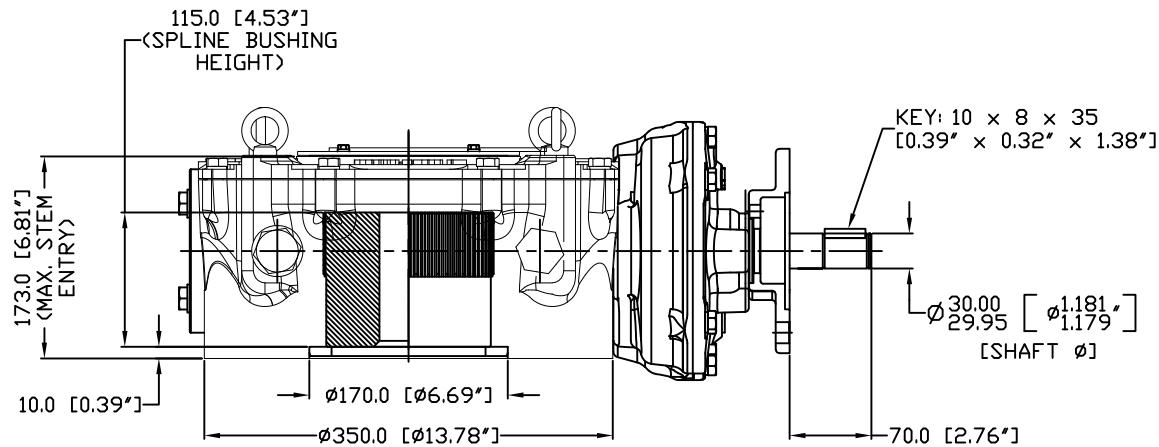

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
28"	214

REV.A

C921247A

12/17/2019

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
165,331	2984	180:1	55.4	±20°	45	190	ø4-3/8" Key: 1" x 3/4"	3-5/8"	FA25 & FA30



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

