

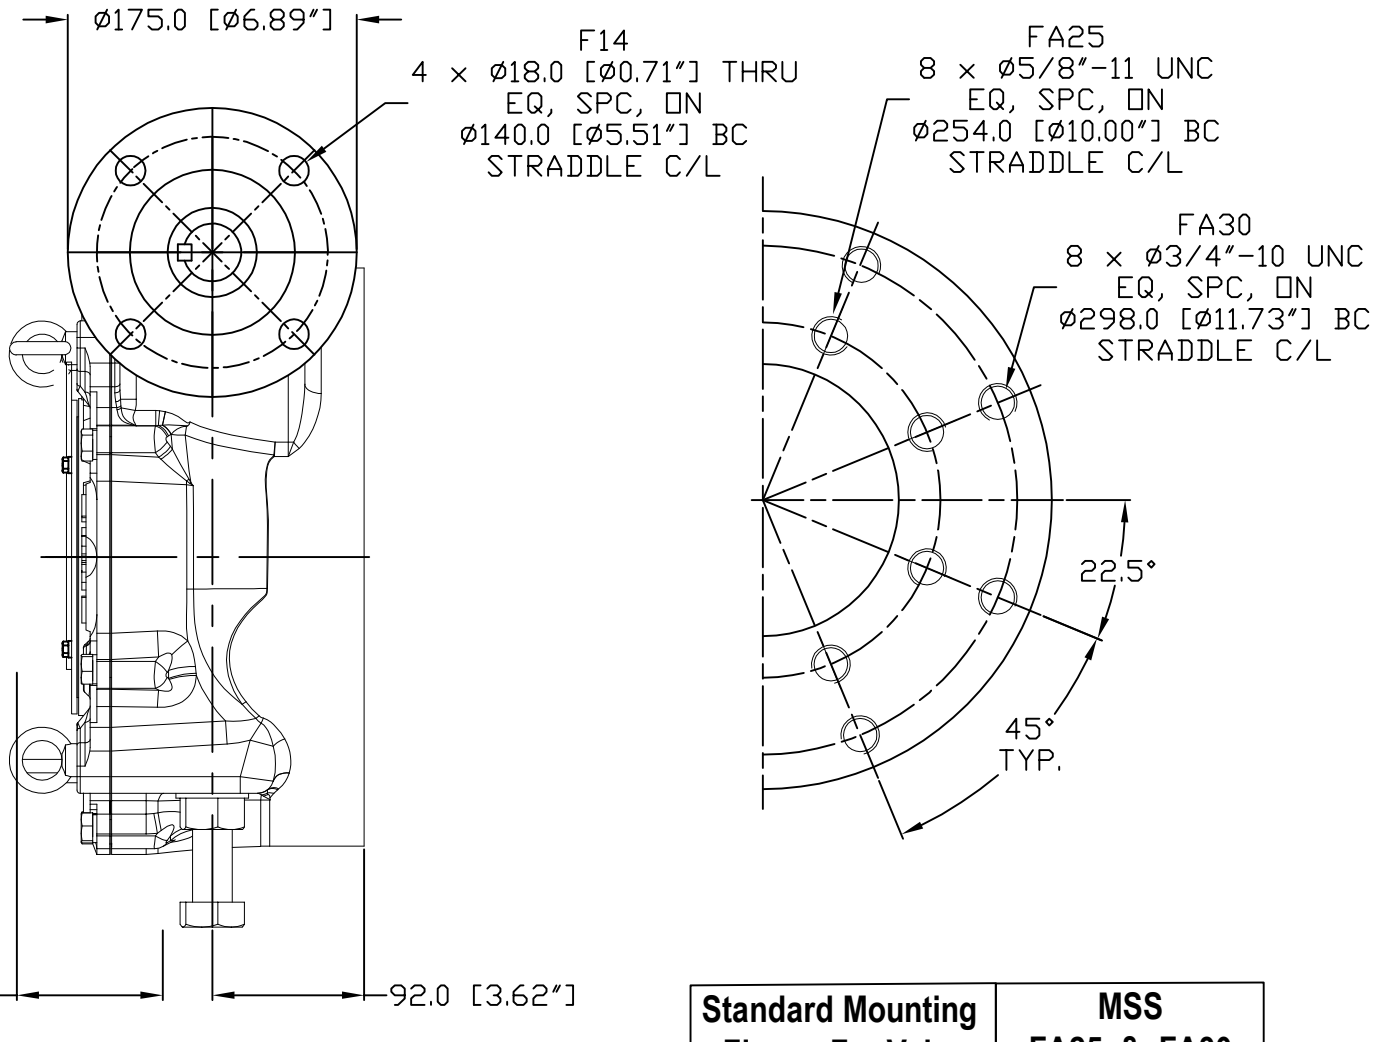
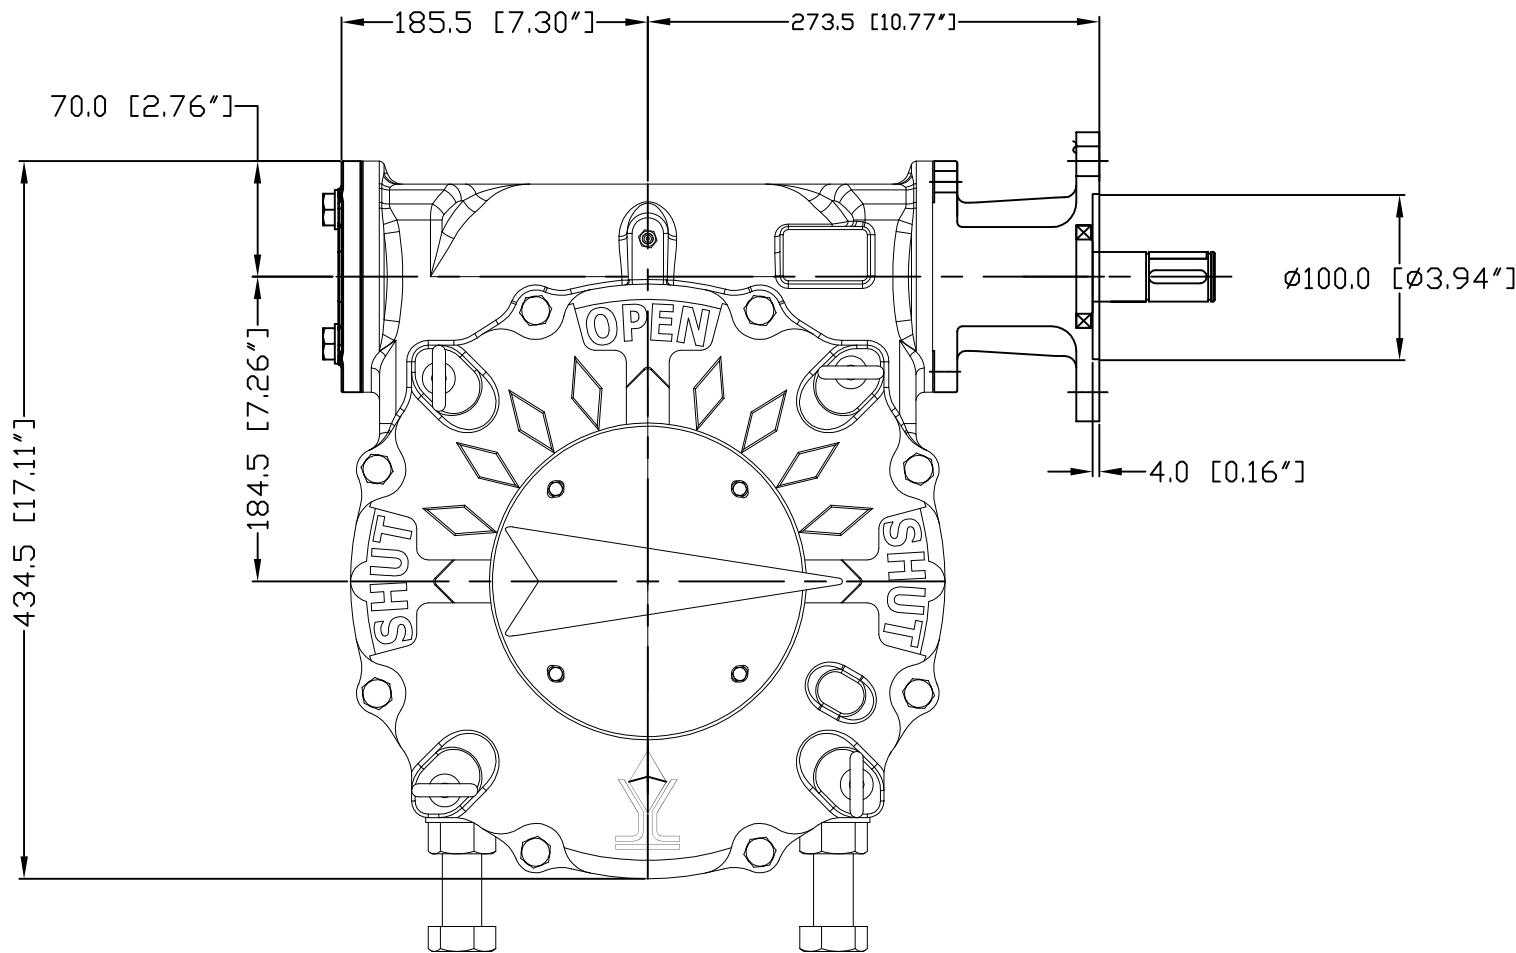


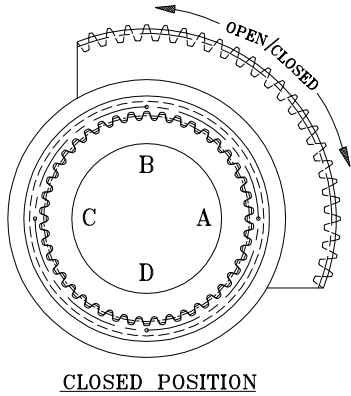

Standard Mounting Flange For Valve	MSS FA25 & FA30
---------------------------------------	--------------------

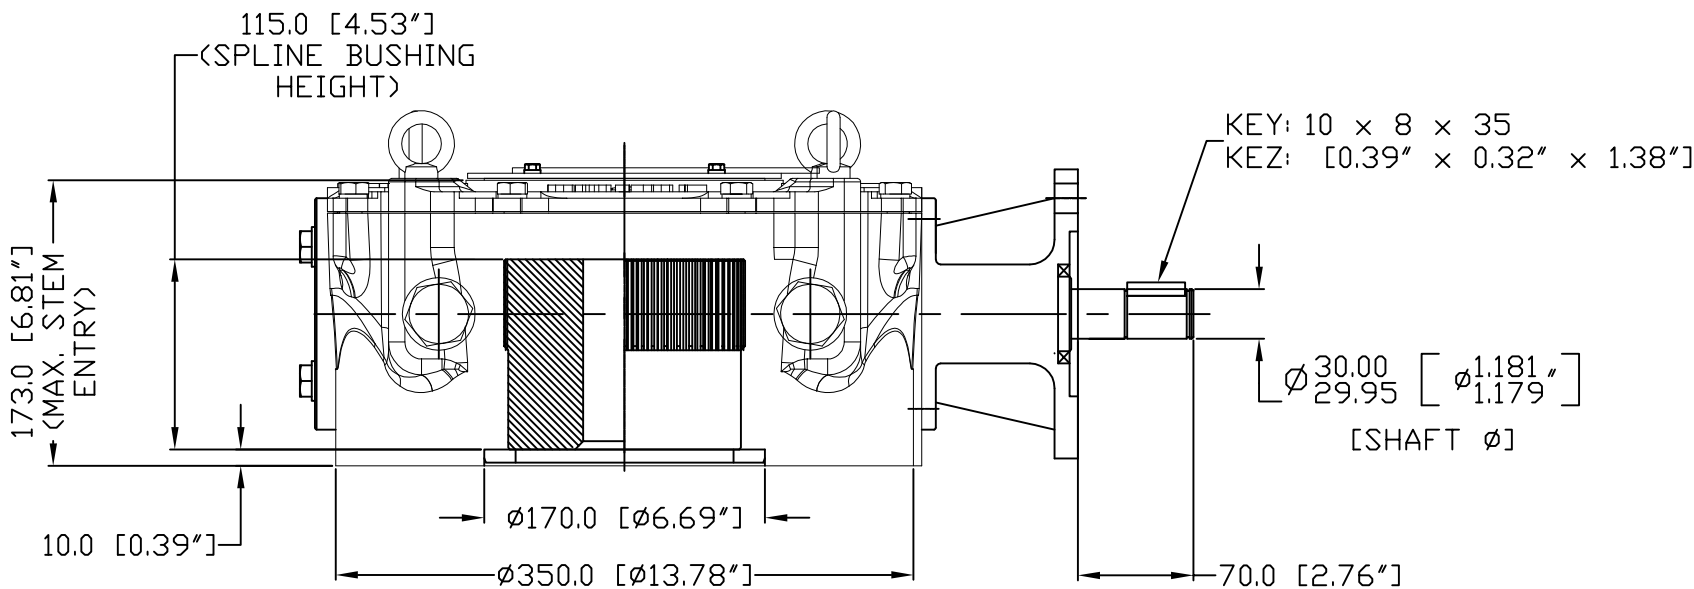

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
28"	563

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
165,331	7,873	60:1	21	±20°	15	139	Ø4-3/8" Key: 1" x 3/4"	3-5/8"	FA25 & FA30



CNC FLOW CONTROL
HOUSTON, TEXAS, USA



PHONE: 713-466-1644, FAX: 713-466-1715