

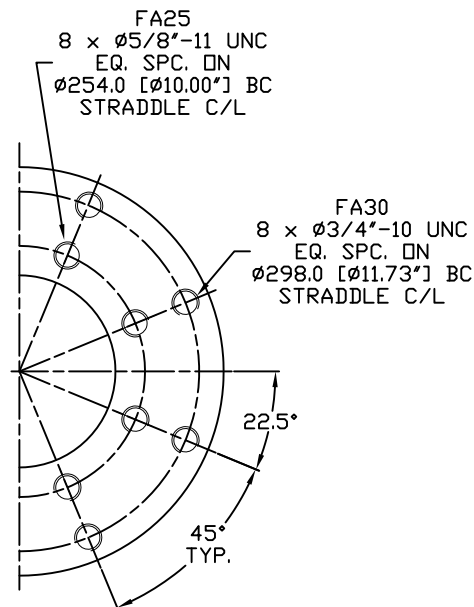
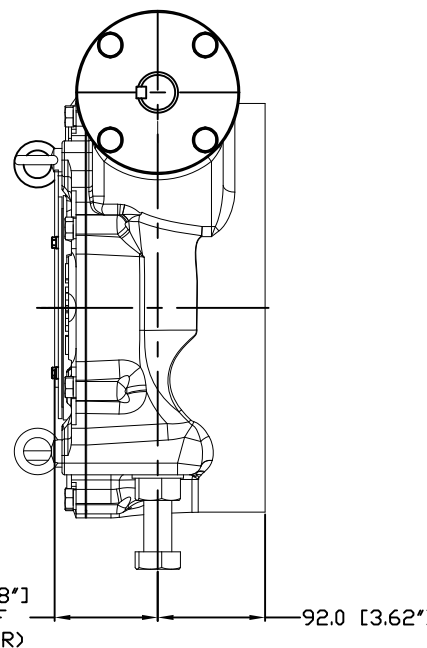
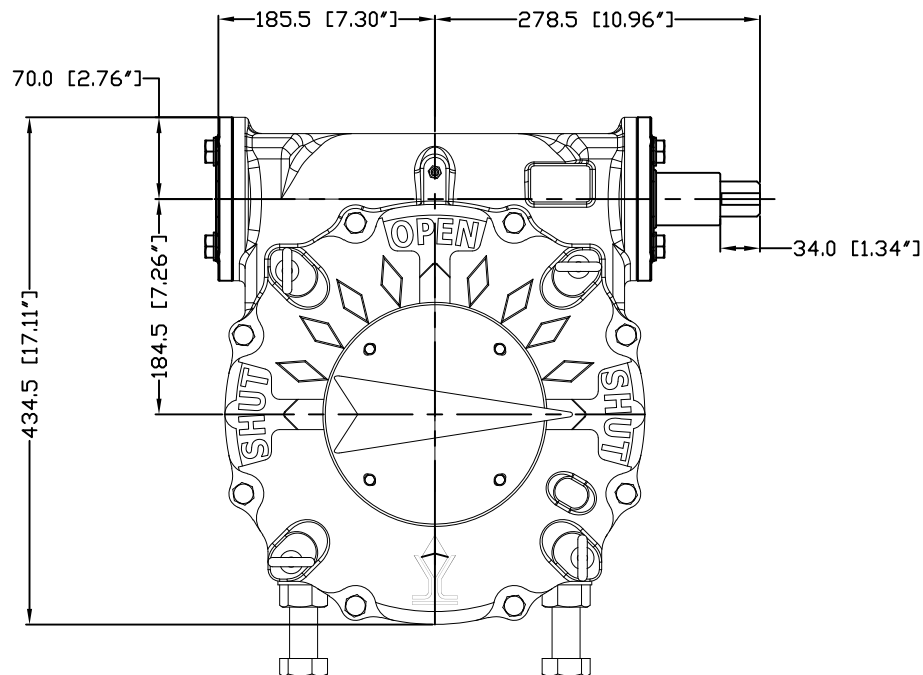




Standard Mounting Flange For Valve	MSS FA25 & FA30
---------------------------------------	--------------------

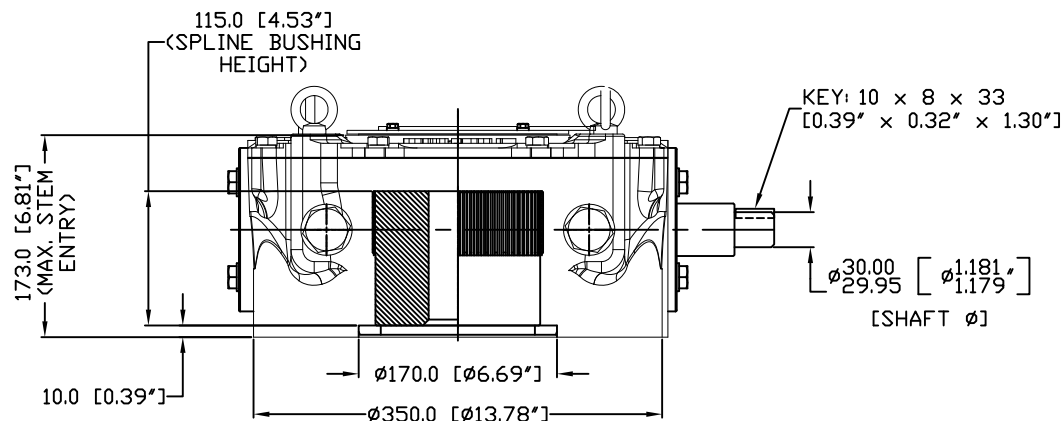

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
28"	563

REV.A

C921246A 12/17/19

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
165,331	7,873	60:1	21	±20°	15	139	$\phi 4-3/8"$ Key: 1" x 3/4"	3-5/8"	FA25 & FA30



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

