
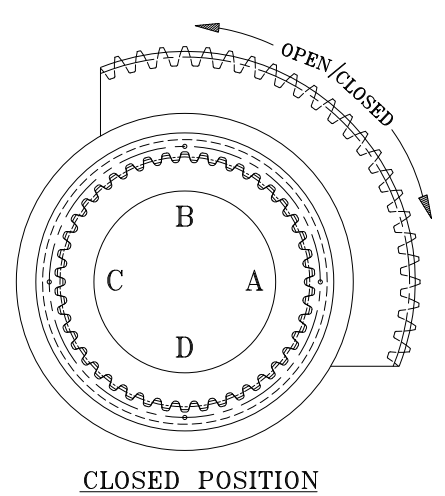
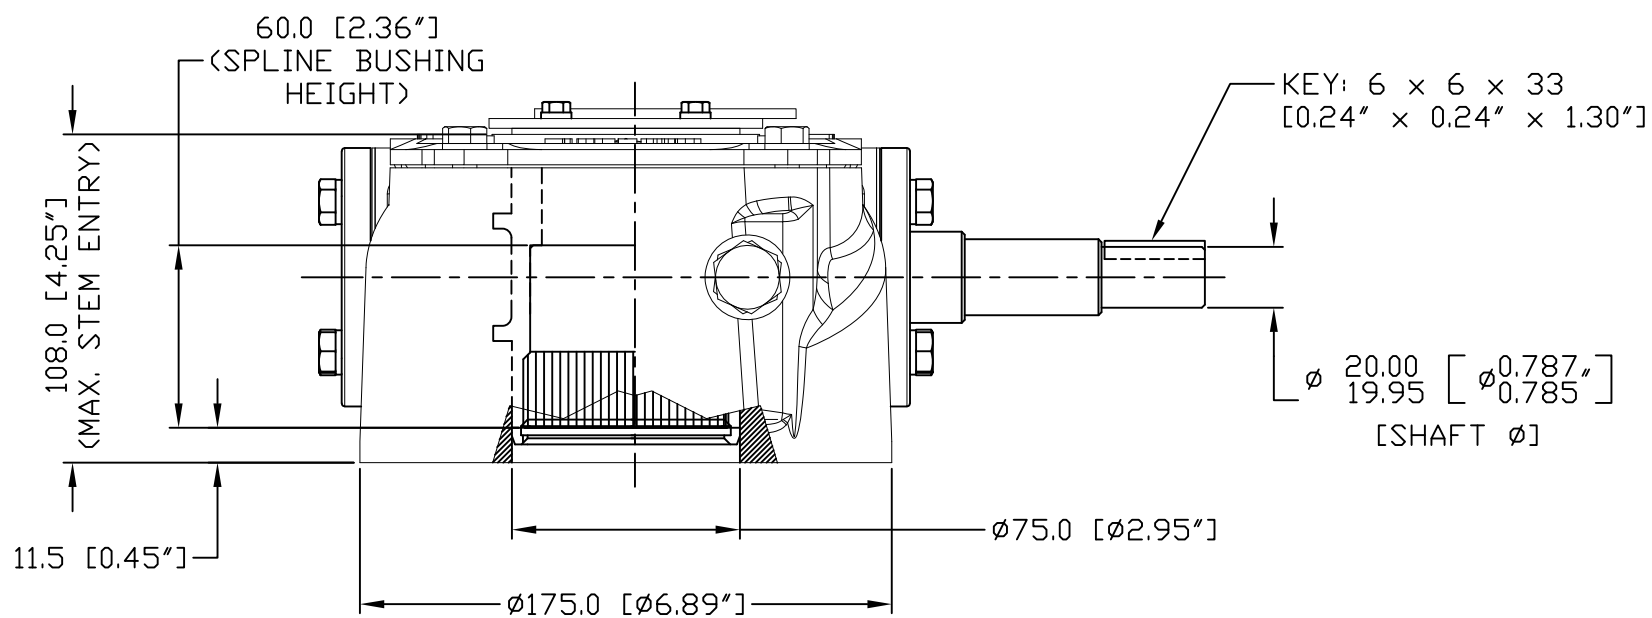
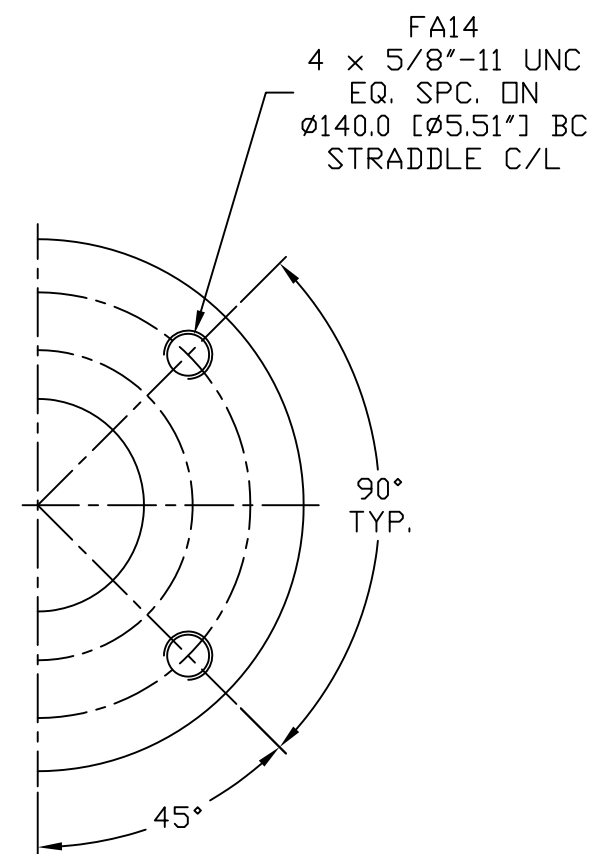
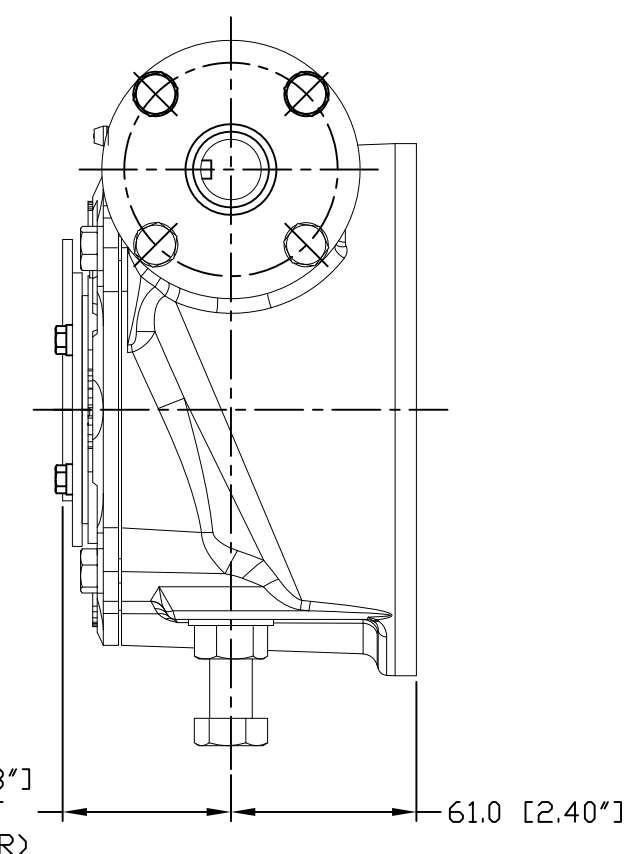


DIAMOND GEAR

16WG40

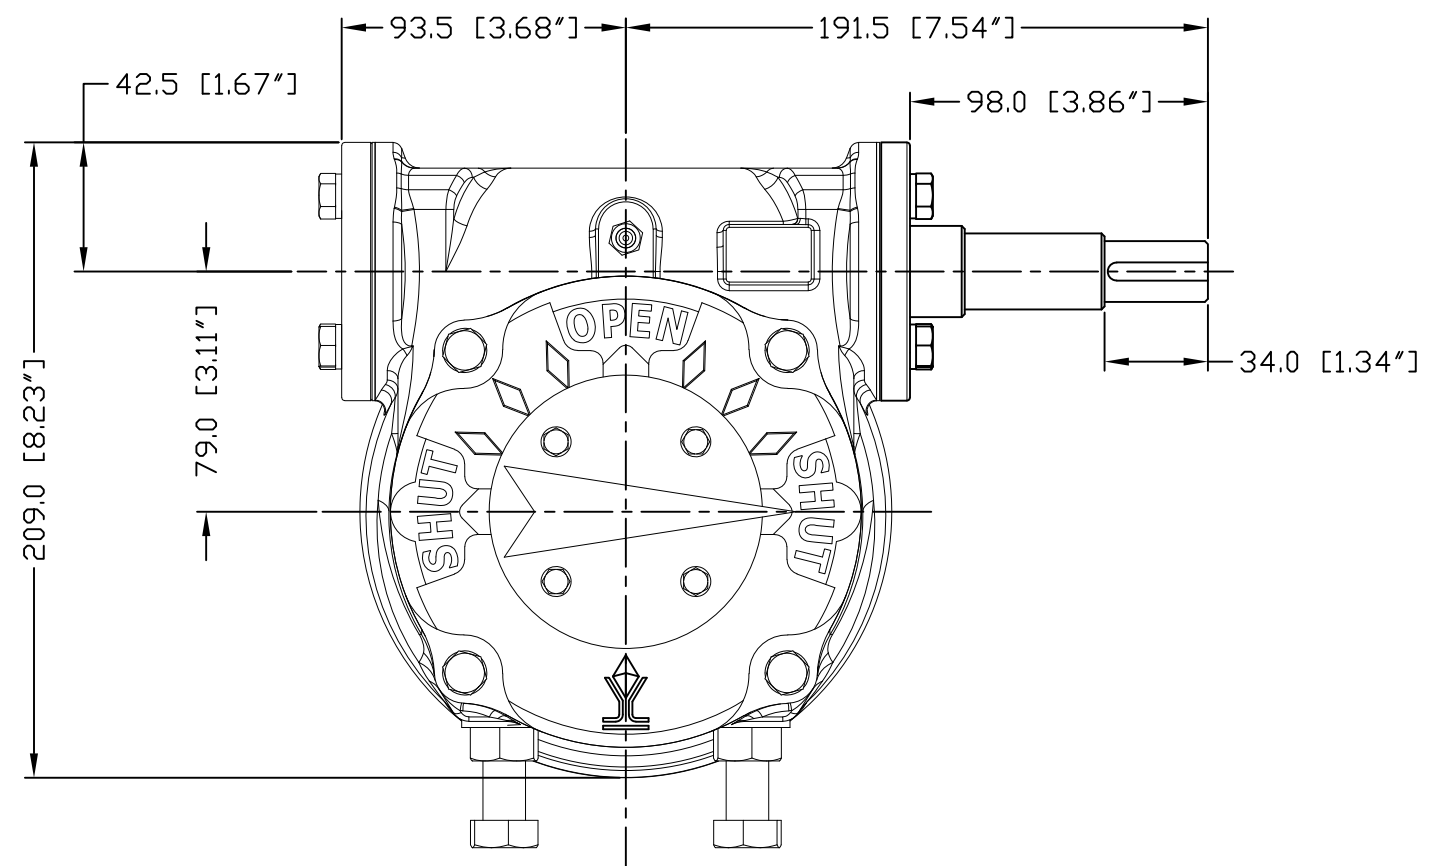

Standard Mounting Flange For Valve	MSS FA14
---------------------------------------	-------------

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
16"	150

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	VALVE MOUNTING STRADDLE C/L
16,578	1,184	40:1	14.0	10	31	Ø1-3/4" Key: 1/2" x 3/8"	1-1/2"	FA14 (STANDARD) FA12 (OPTIONAL)



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921209A	12/17/19
----------	----------

REV.C