

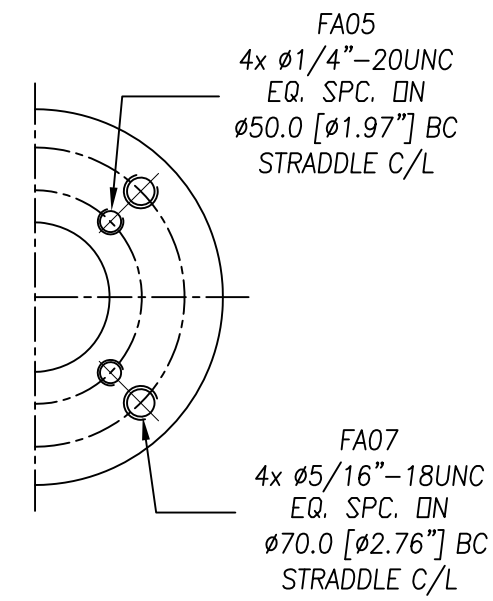
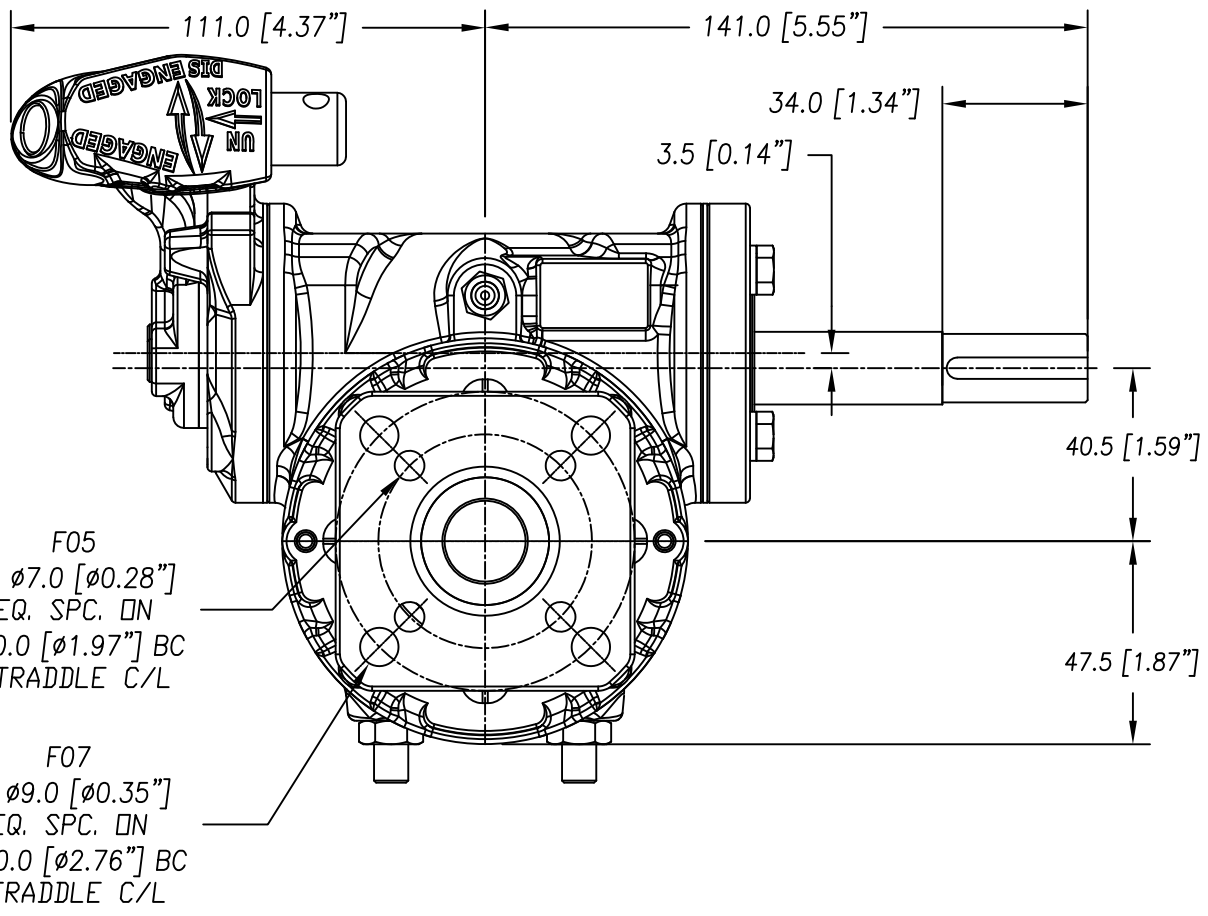
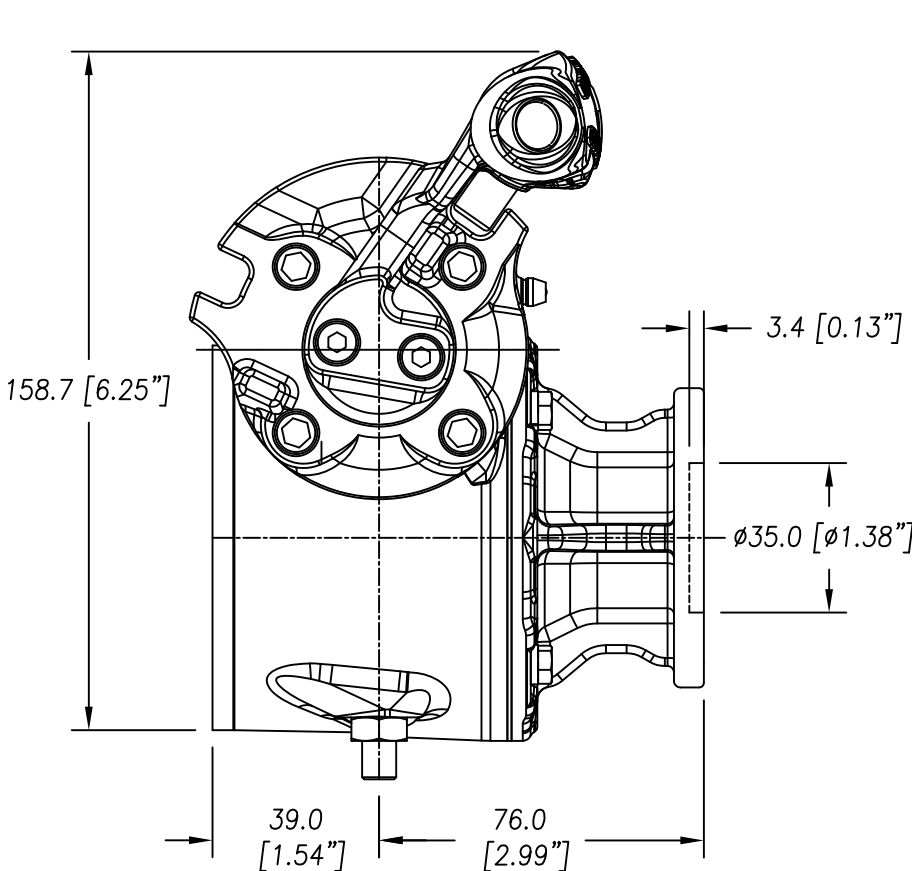


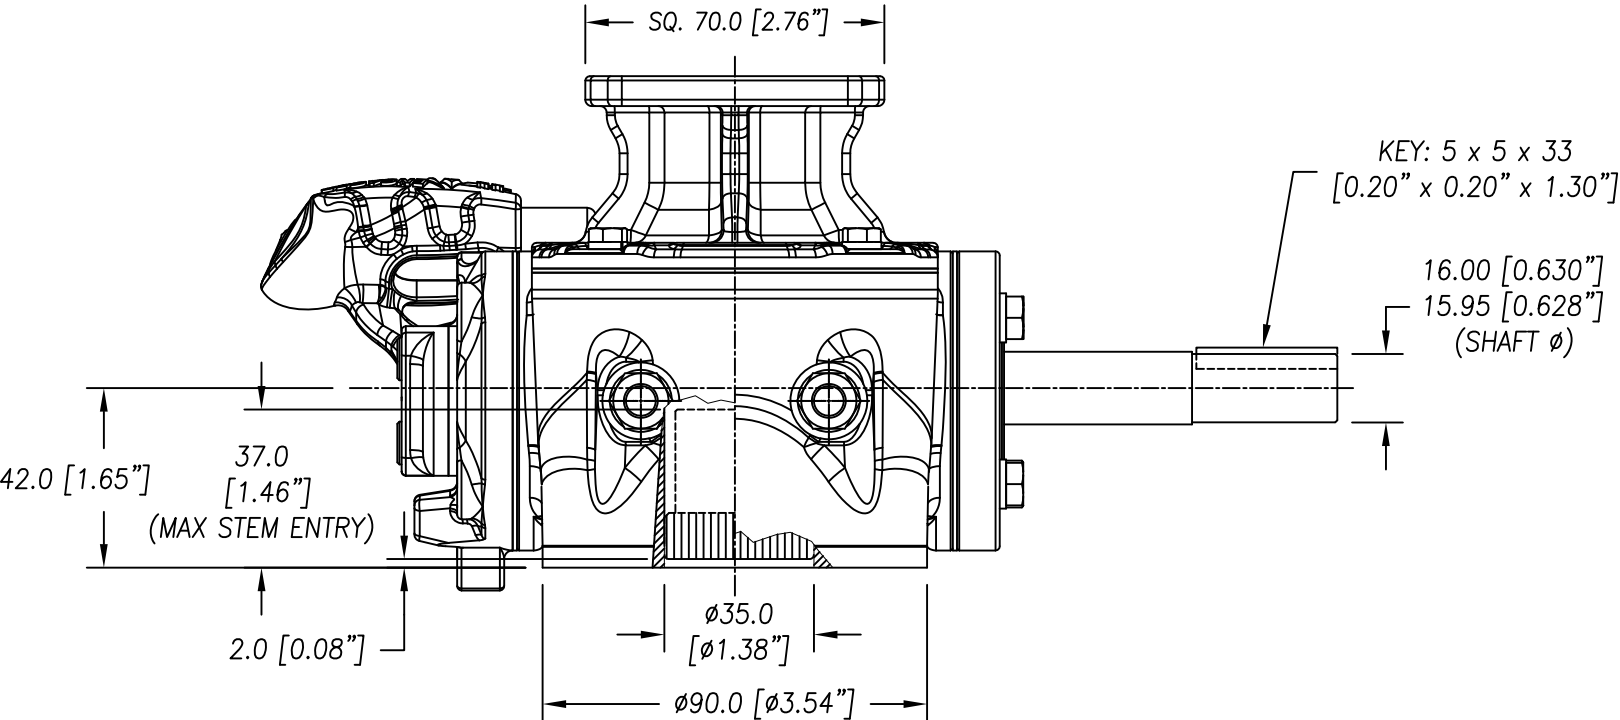

Standard Mounting
Flange For Valve

MSS FA05 & FA07

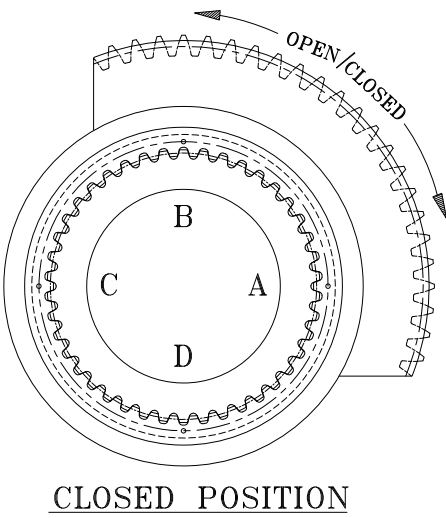

H.W. DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
6"	74

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
2,609	233	31:1	11.2	±10°	7.75	13	$\phi 3/4$ " Key: 3/16" x 3/16"	9/16"	F05 & F07	FA05 & FA07

C921238A

REV.0

9/16/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

