
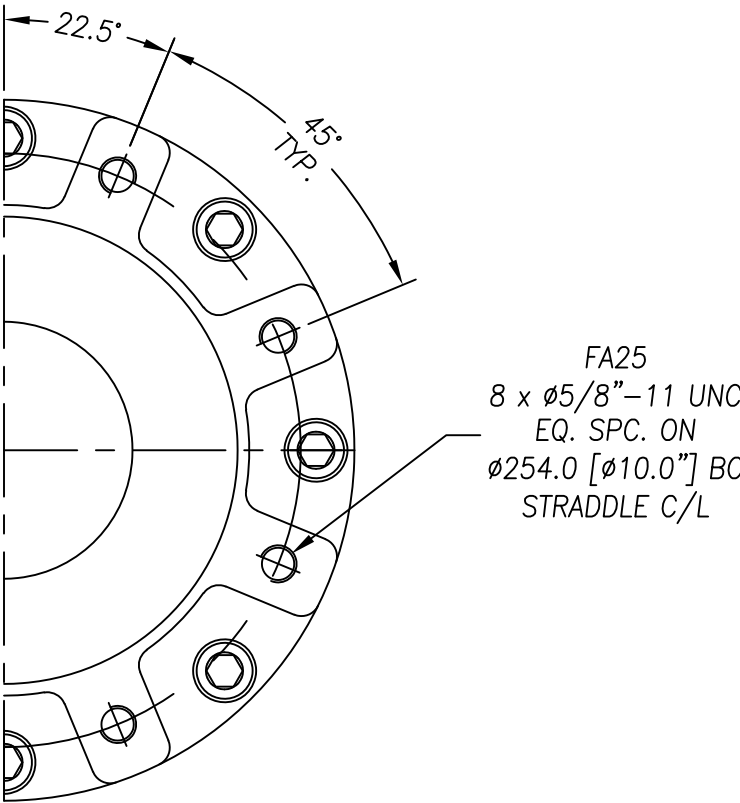
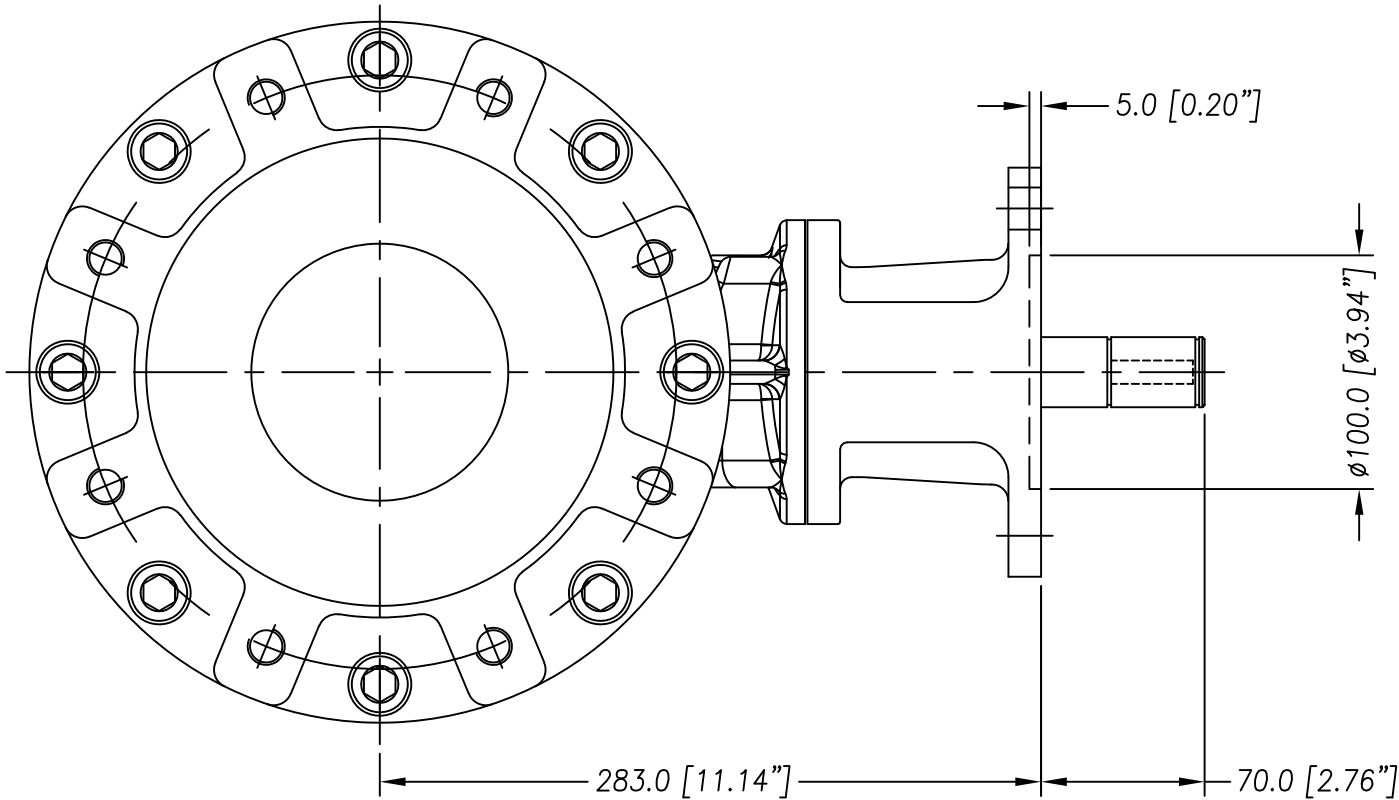
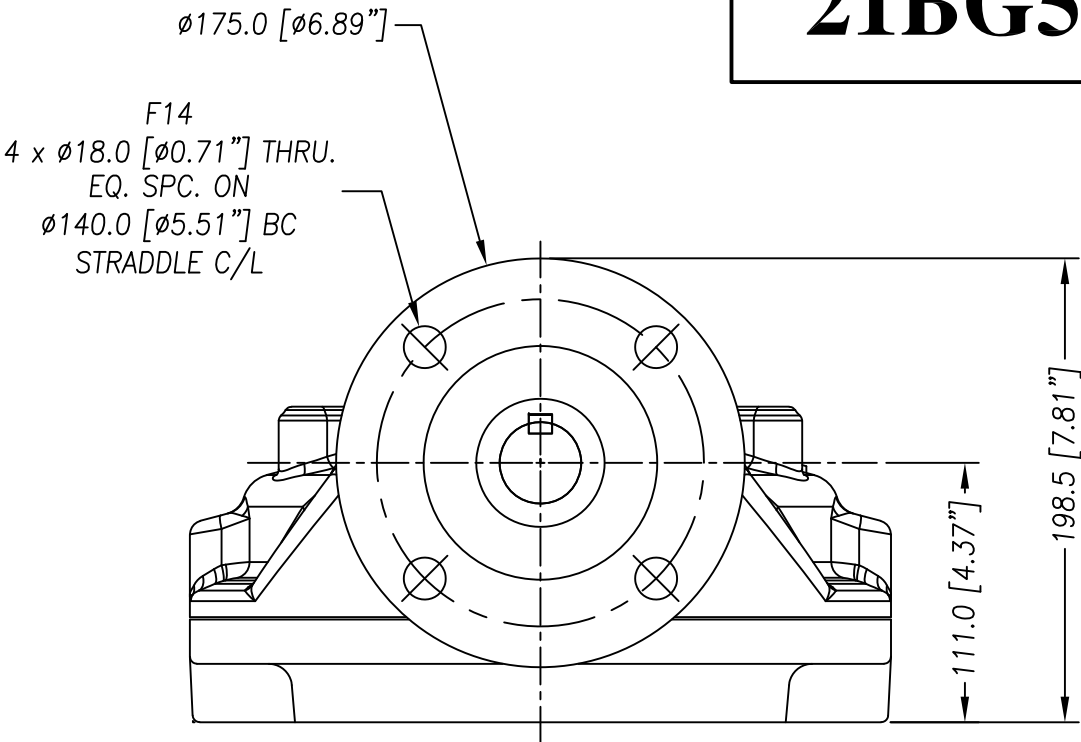


DIAMOND GEAR

21BG5

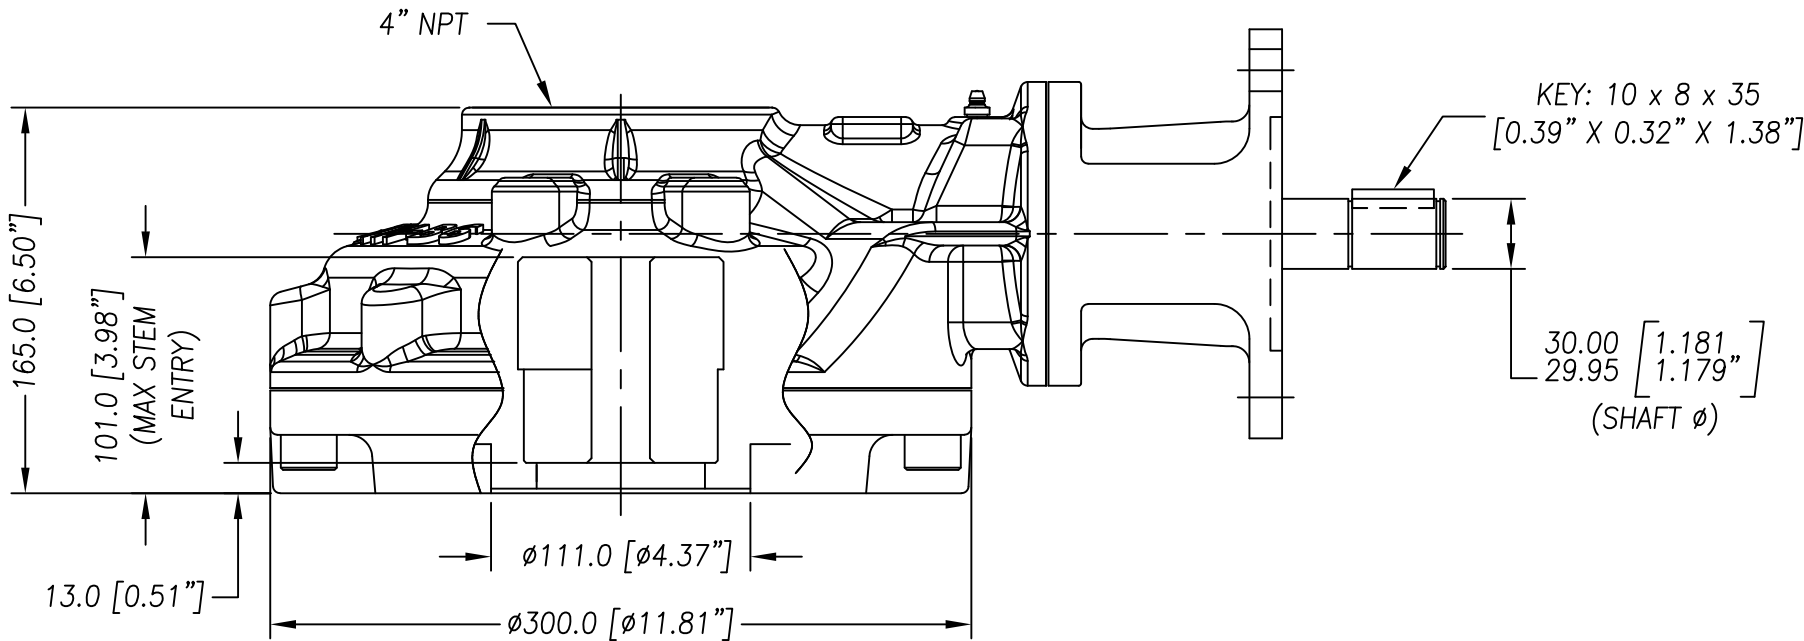

Standard Mounting
Flange For Valve

MSS FA25

UNITS: MM [Inches]

MAX. OUTPUT TORQUE		MAX. INPUT TORQUE		RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	MAX ROUND BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
[FT.LB]	[IN.LB]	[FT.LB]	[IN.LB]						
1,777	21,324	395	4,737	5.0:1	4.5	64,769	115	$\phi 2-1/2$ " KEY: 5/8" X 7/16"	FA25

REV.0

C921262A

10/28/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

