
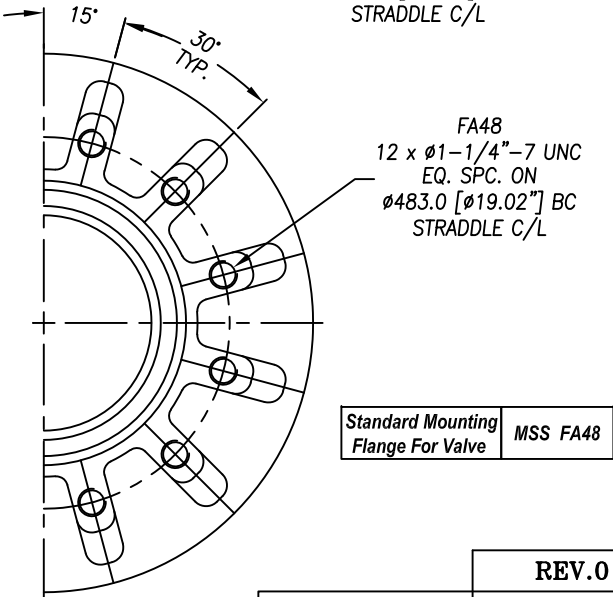
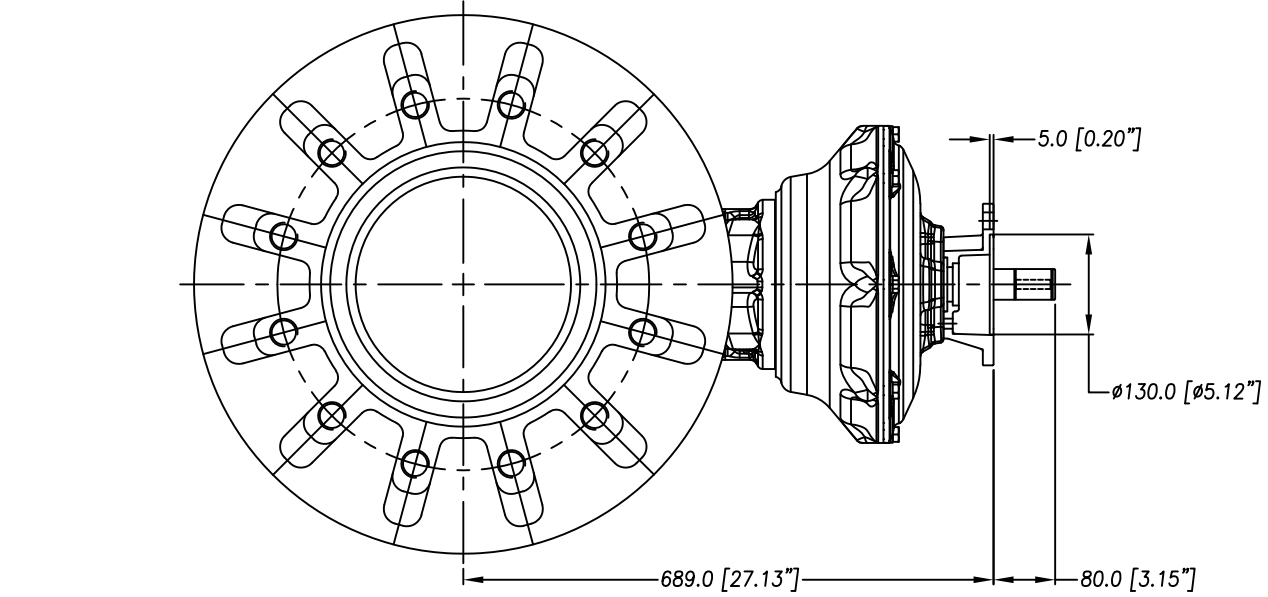
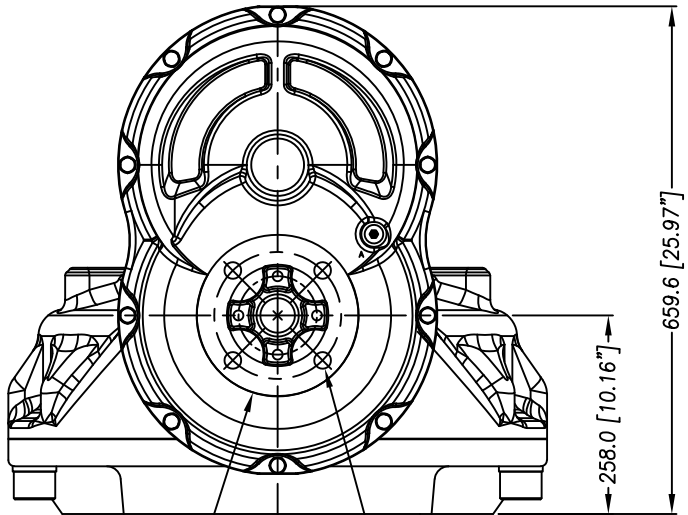


DIAMOND GEAR

228BG200

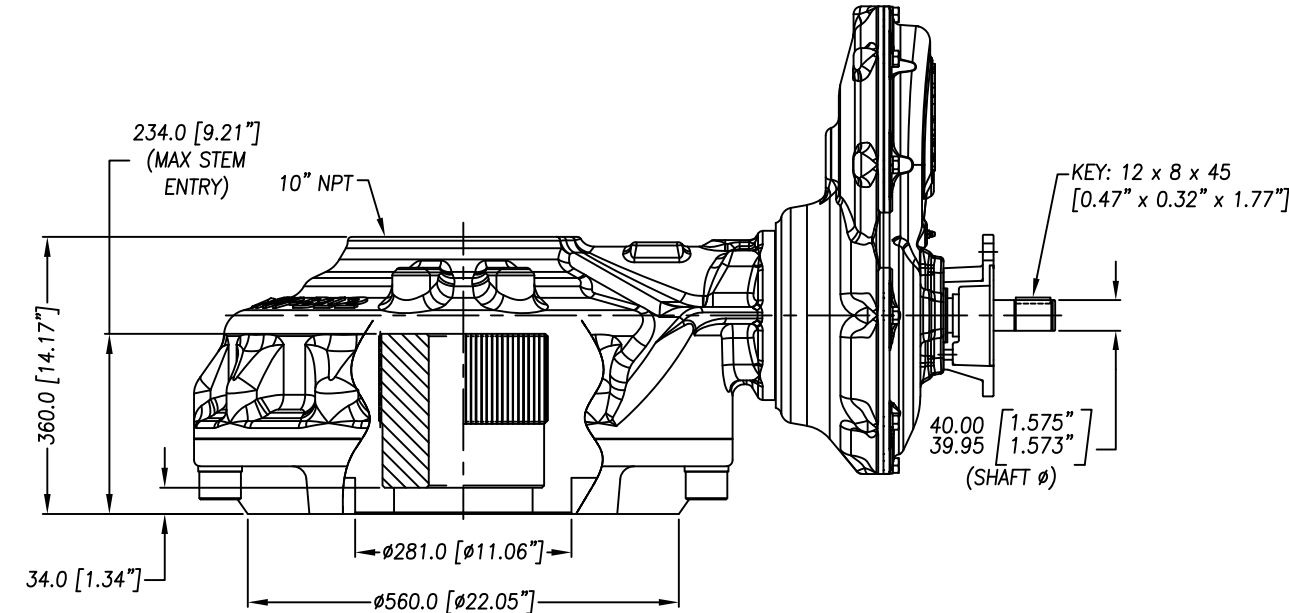

Standard Mounting Flange For Valve MSS FA48

UNITS: MM [Inches]

MAX. OUTPUT TORQUE		MAX. INPUT TORQUE		RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	MAX ROUND BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
[FT.LB]	[IN.LB]	[FT.LB]	[IN.LB]						
19,022	228,264	129	1,552	200:1	147.1	438,405	1,274	Ø5-1/2" KEY: 1-1/4" X 7/8"	FA48

C921273A
REV.0
10/28/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

