

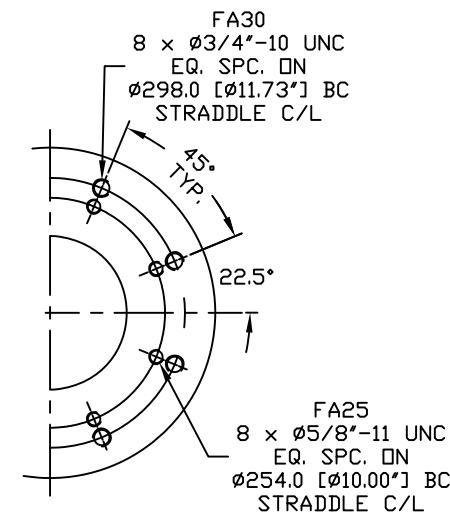
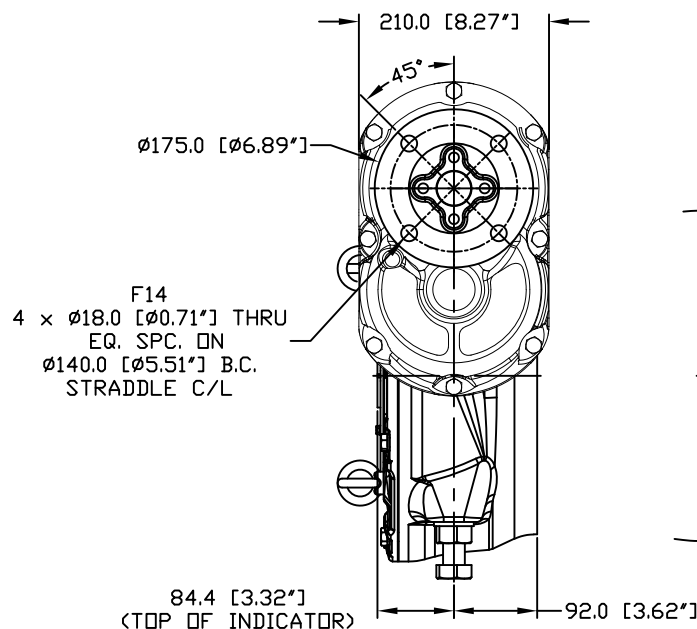
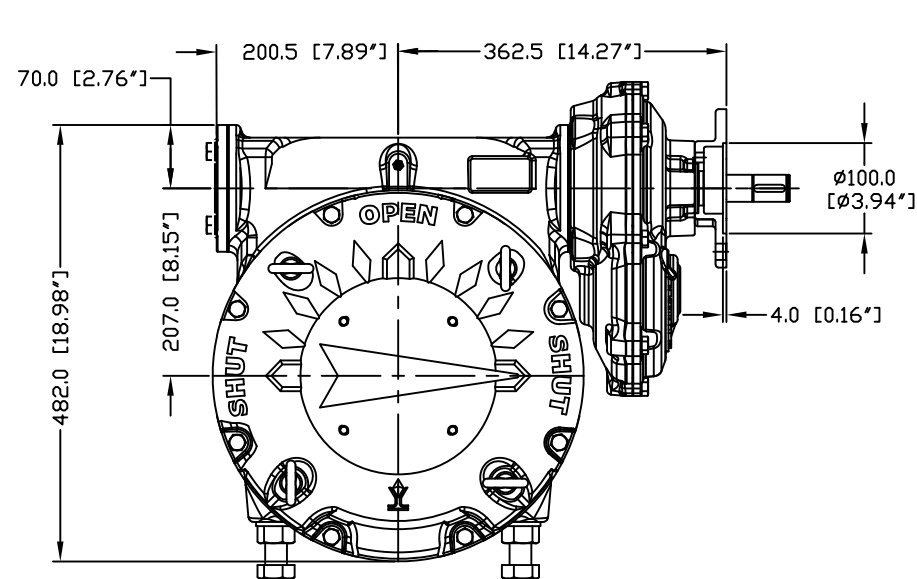


DIAMOND GEAR

230WG558



Standard Mounting Flange For Valve	MSS FA25 & FA30
---------------------------------------	--------------------

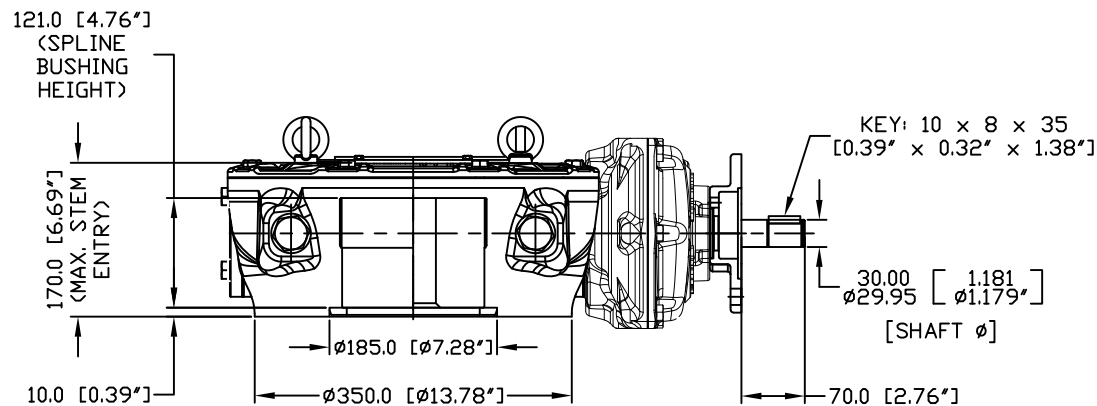

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
28"	109

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
230,200	1522	558:1	151.2	±20°	139.5	243	Ø4-3/4" Key: 1-1/4"x7/8"	3-7/8"	FA25 & FA30



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921244A 12/17/19

REV.A