

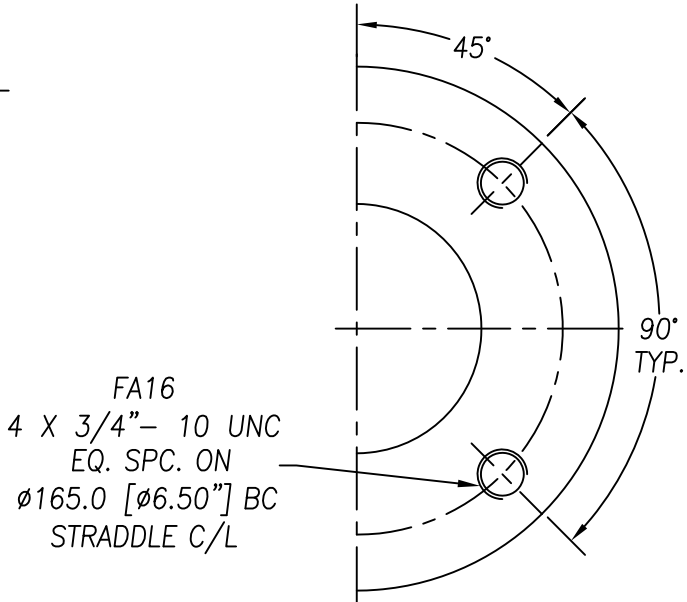
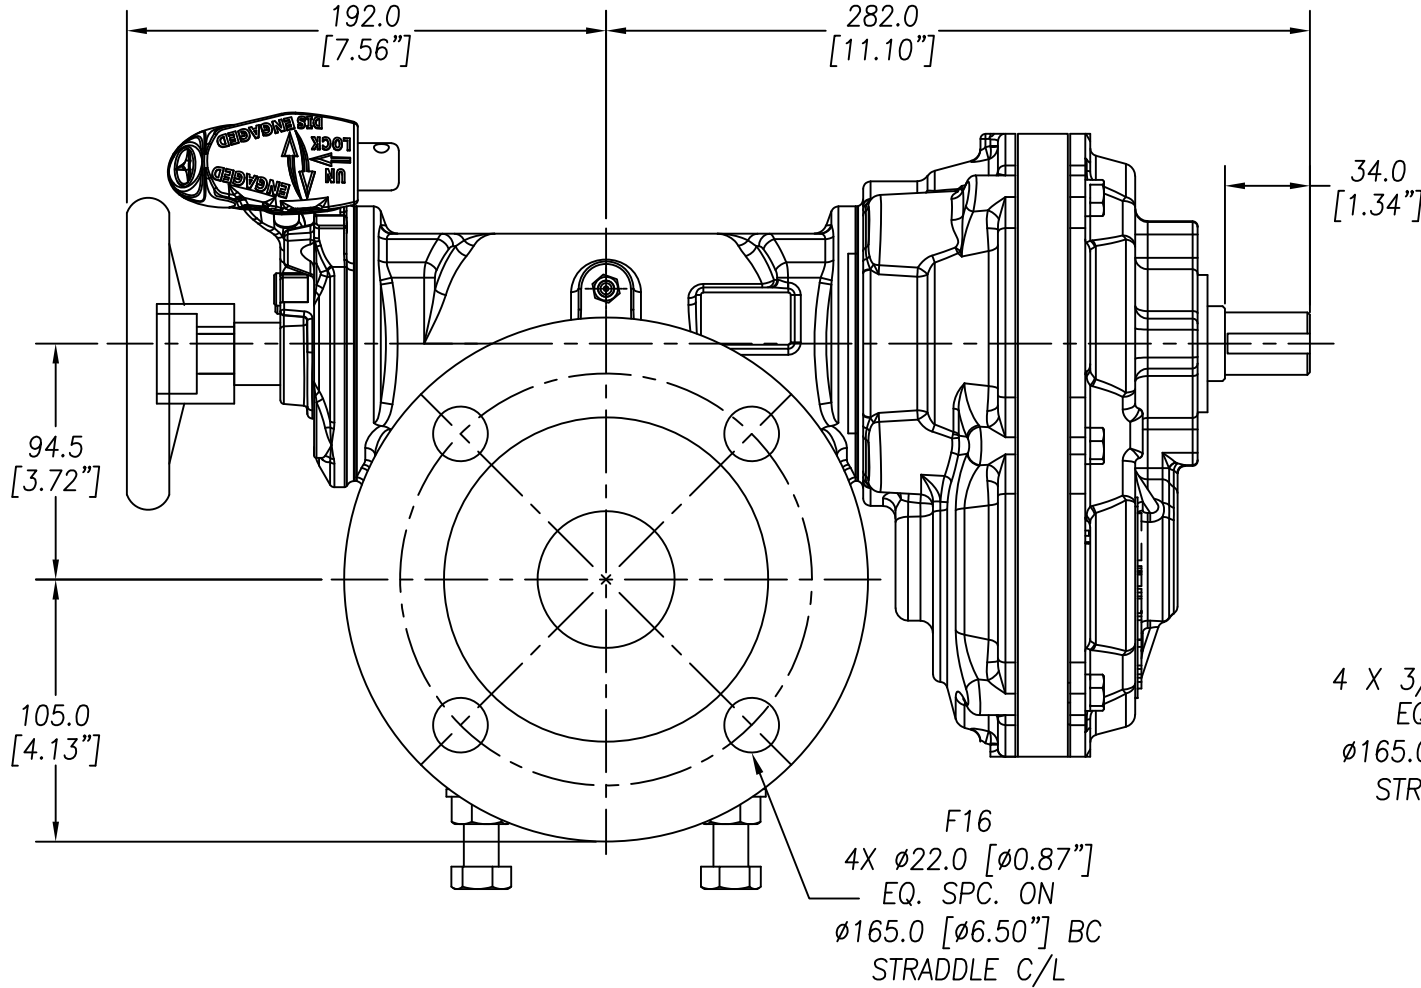
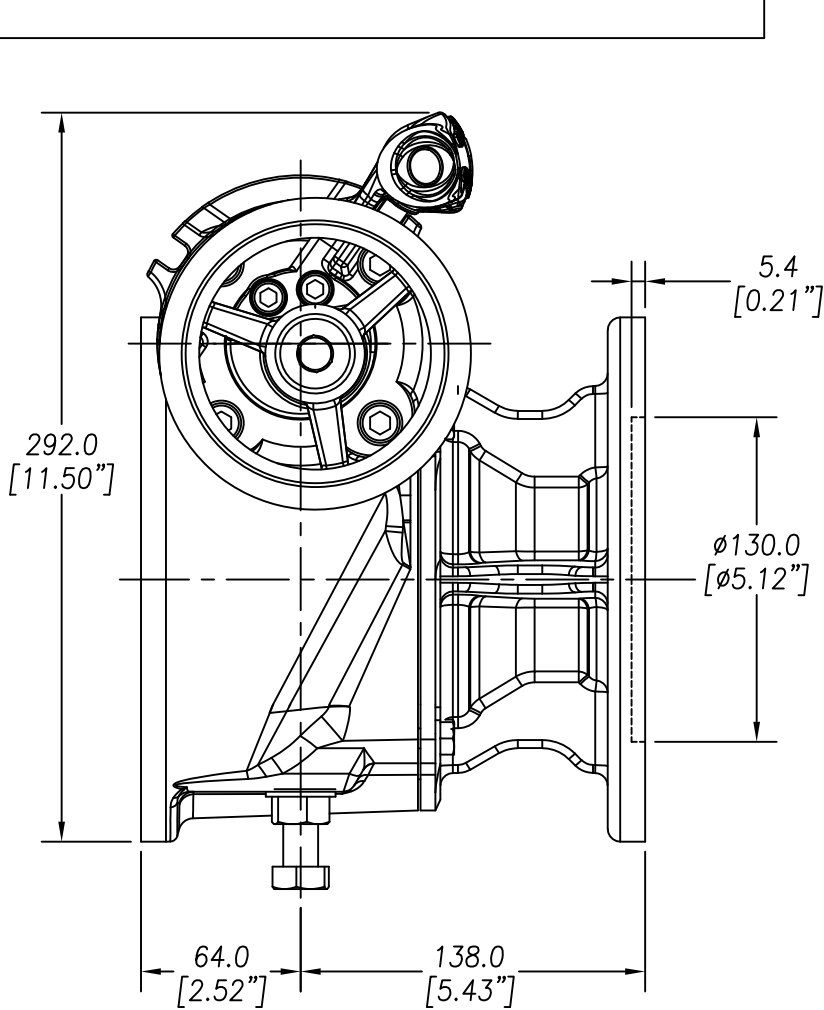


DIAMOND GEAR

24.5DW215.7

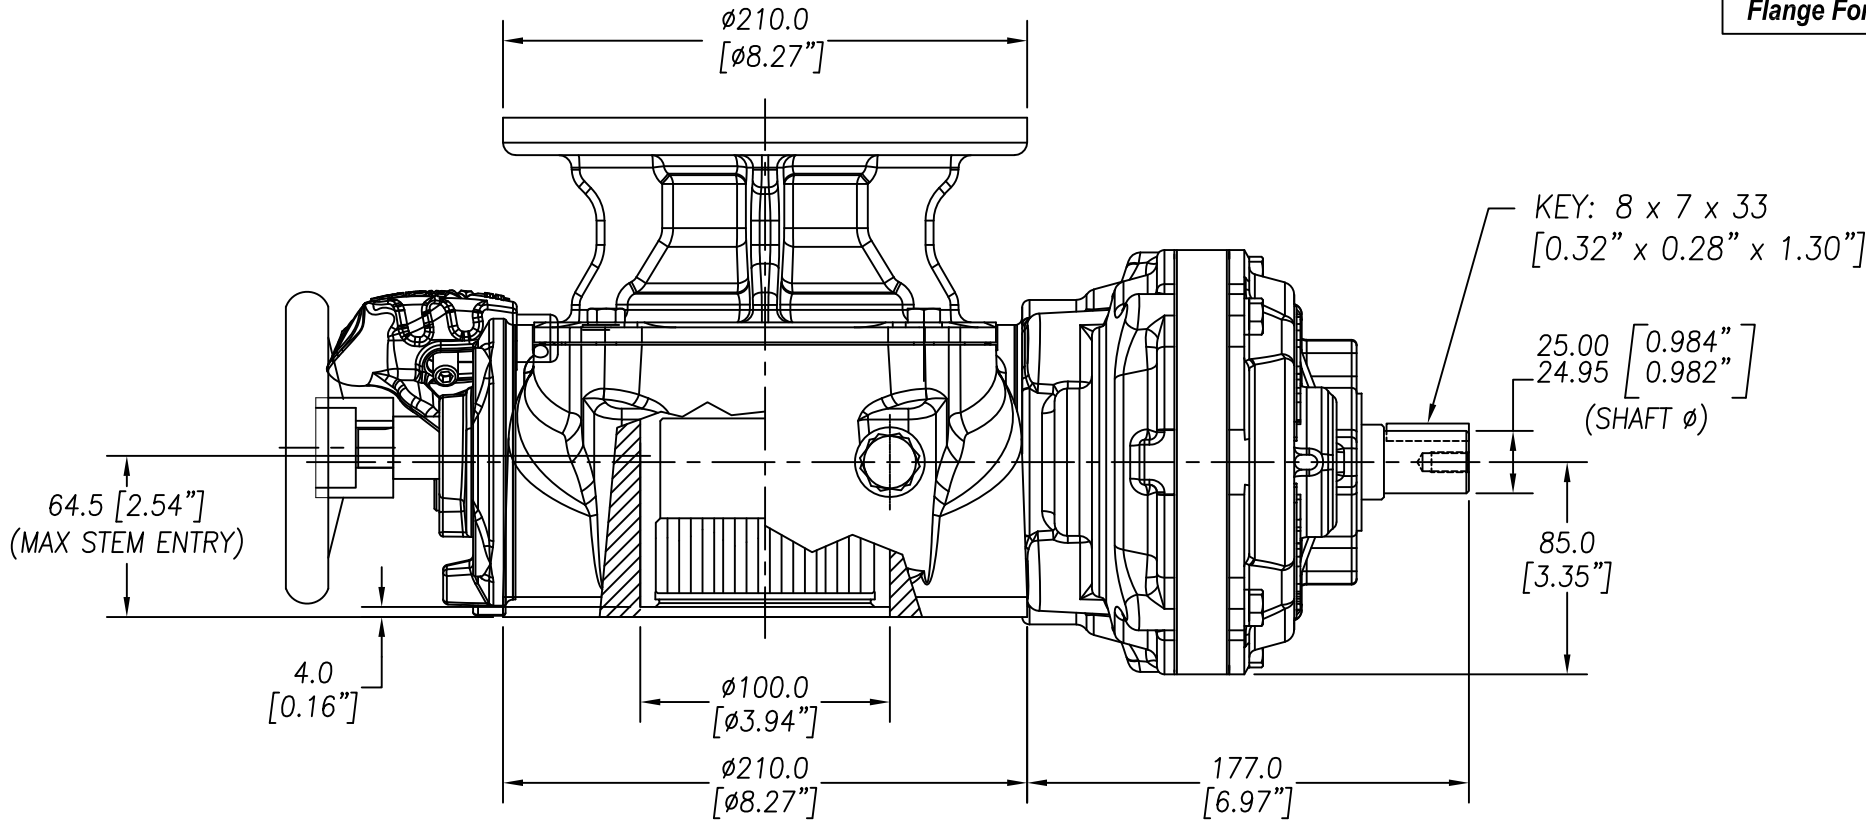

Standard Mounting Flange For Valve	MSS FA16
---------------------------------------	----------

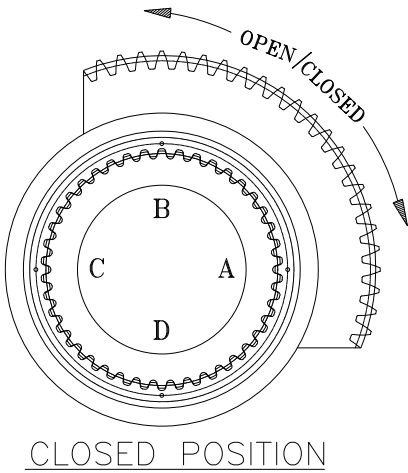

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
20"	43

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
24,644	421	215.7:1	58.5	±20°	53.9	93	$\phi 2\text{-}1/2"$ Key: 5/8" x 7/16"	2.0	F16	FA16



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921275A 9/16/19

REV.0