

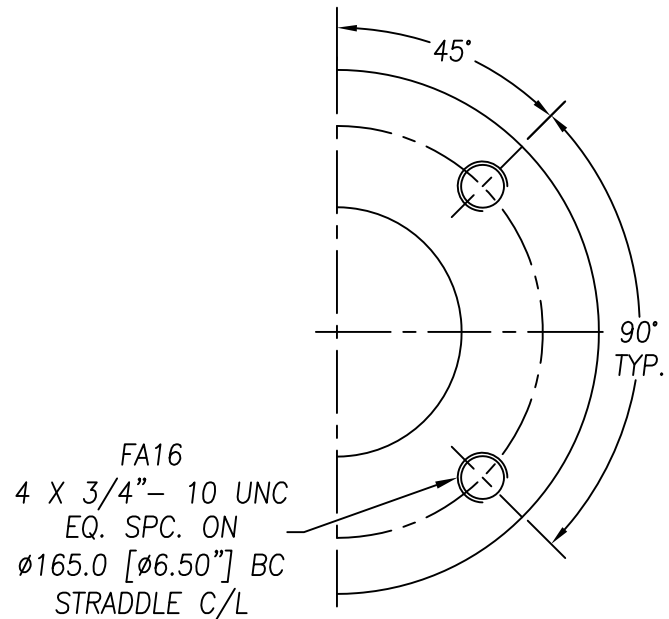
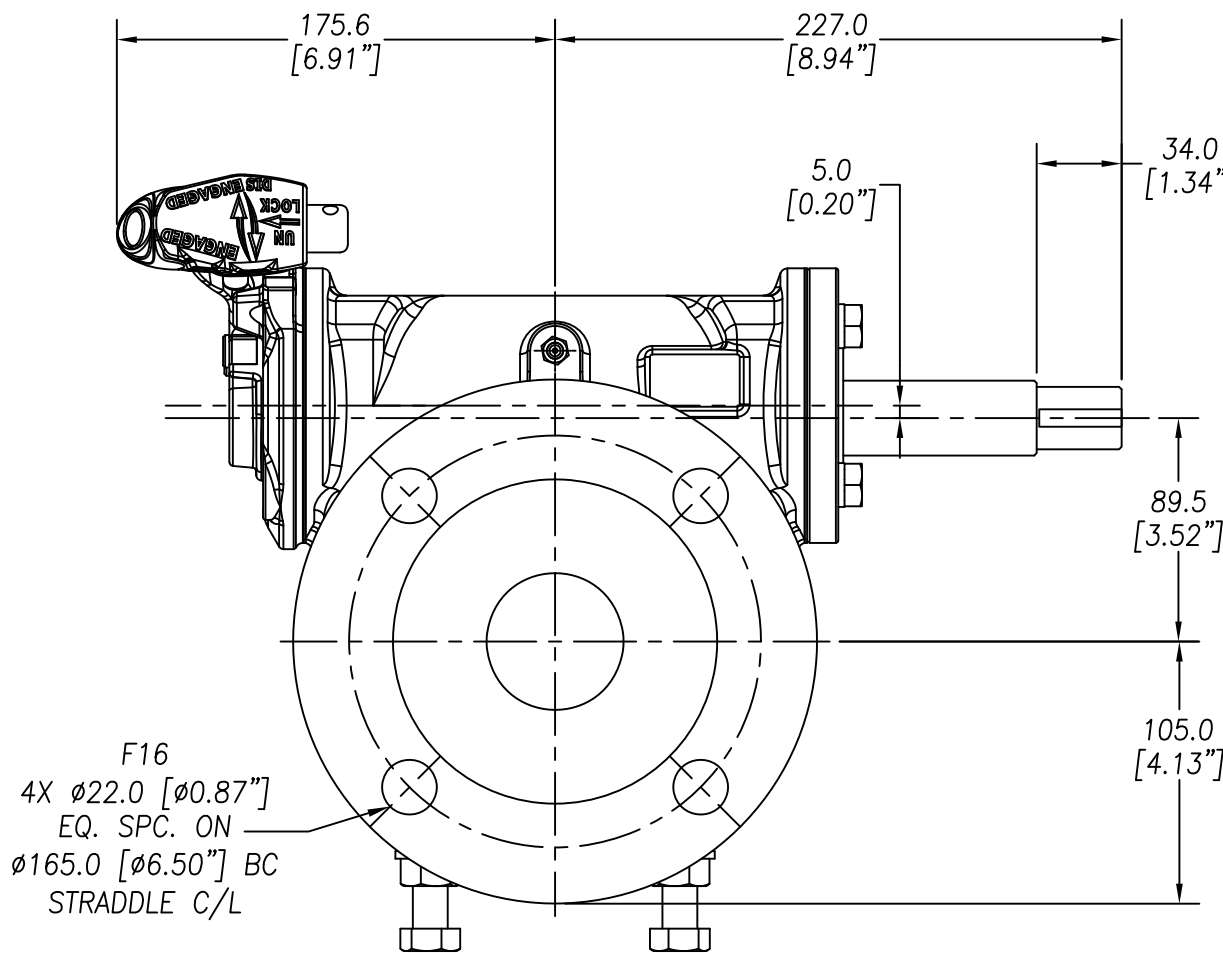
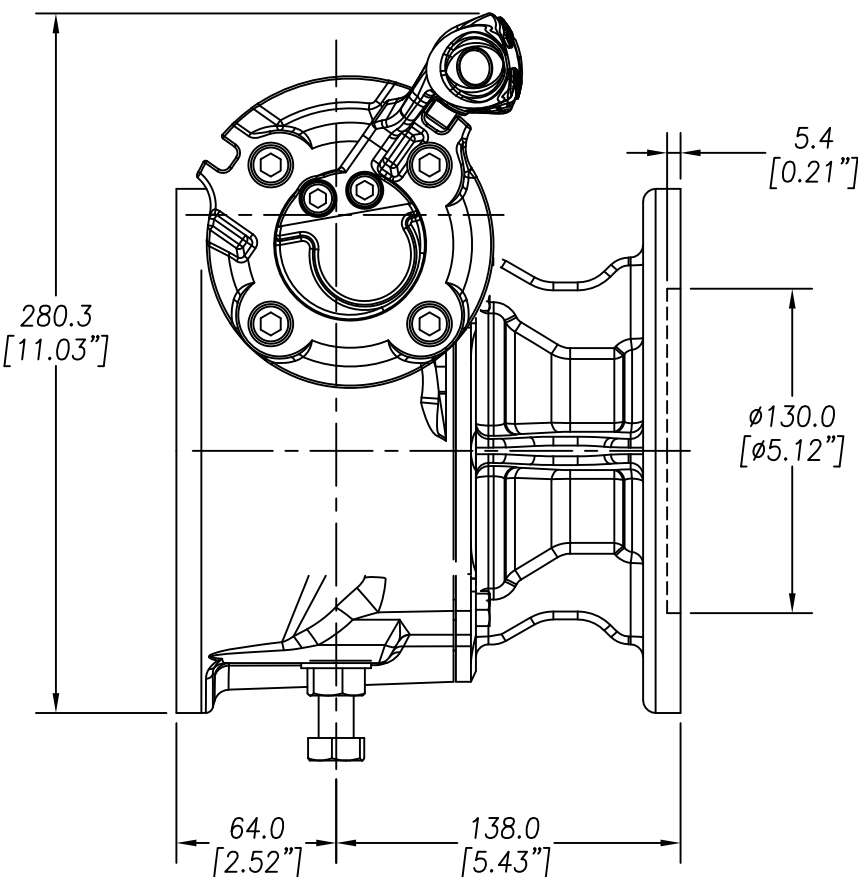


DIAMOND GEAR

24.5DW41

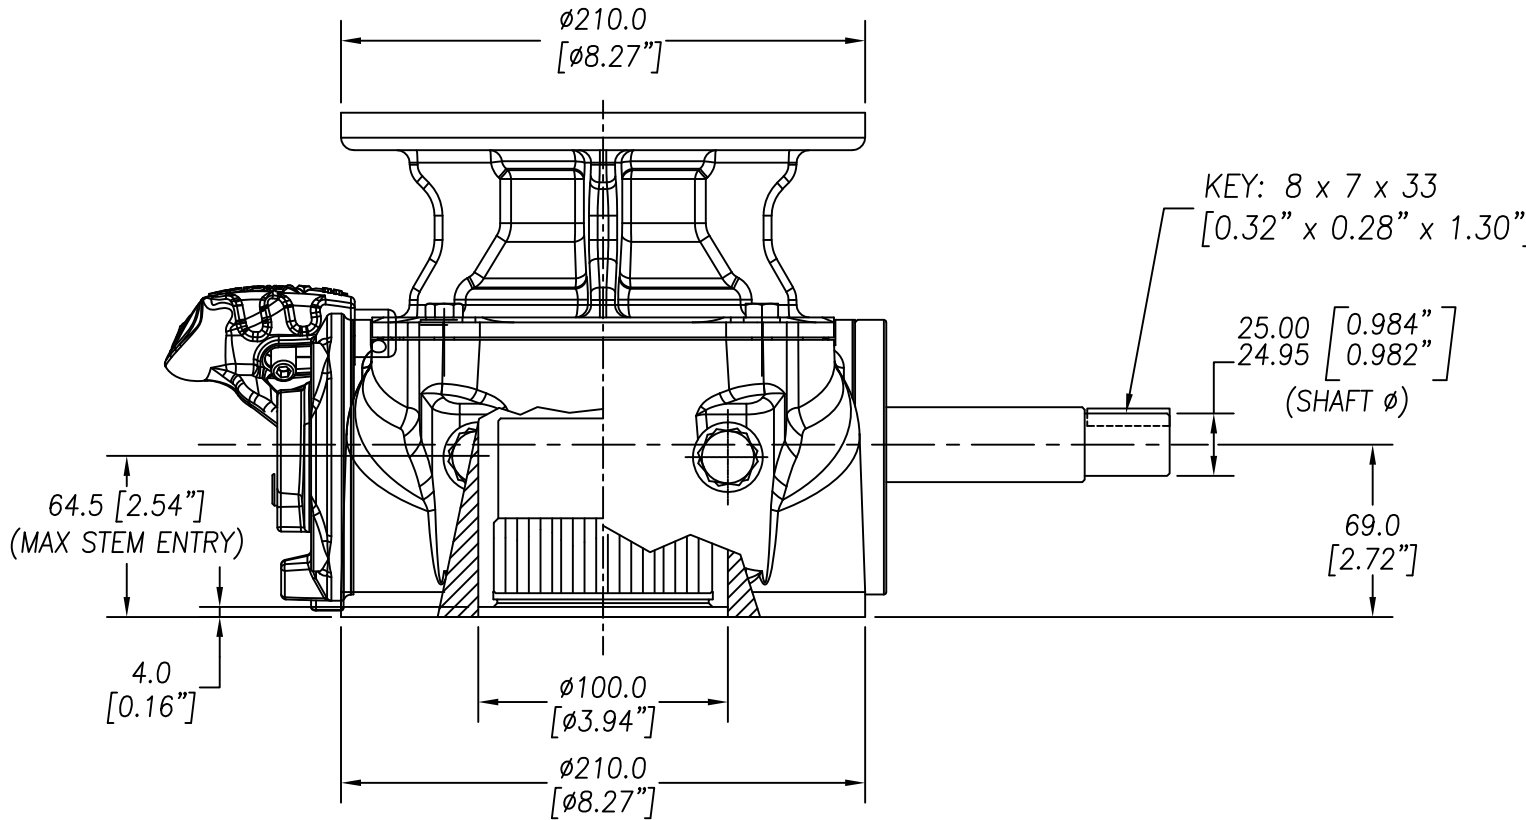

Standard Mounting Flange For Valve	MSS FA16
---------------------------------------	----------

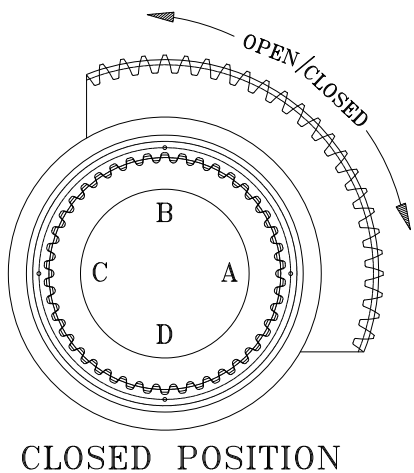

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
20"	174

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
24,644	1,711	41:1	14.4	±20°	10.25	66	2-1/2" Key: 5/8" x 7/16"	2.0"	F16	FA16



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921237A	REV.A
9/24/19	