


DIAMOND GEAR

24.5DW86.1

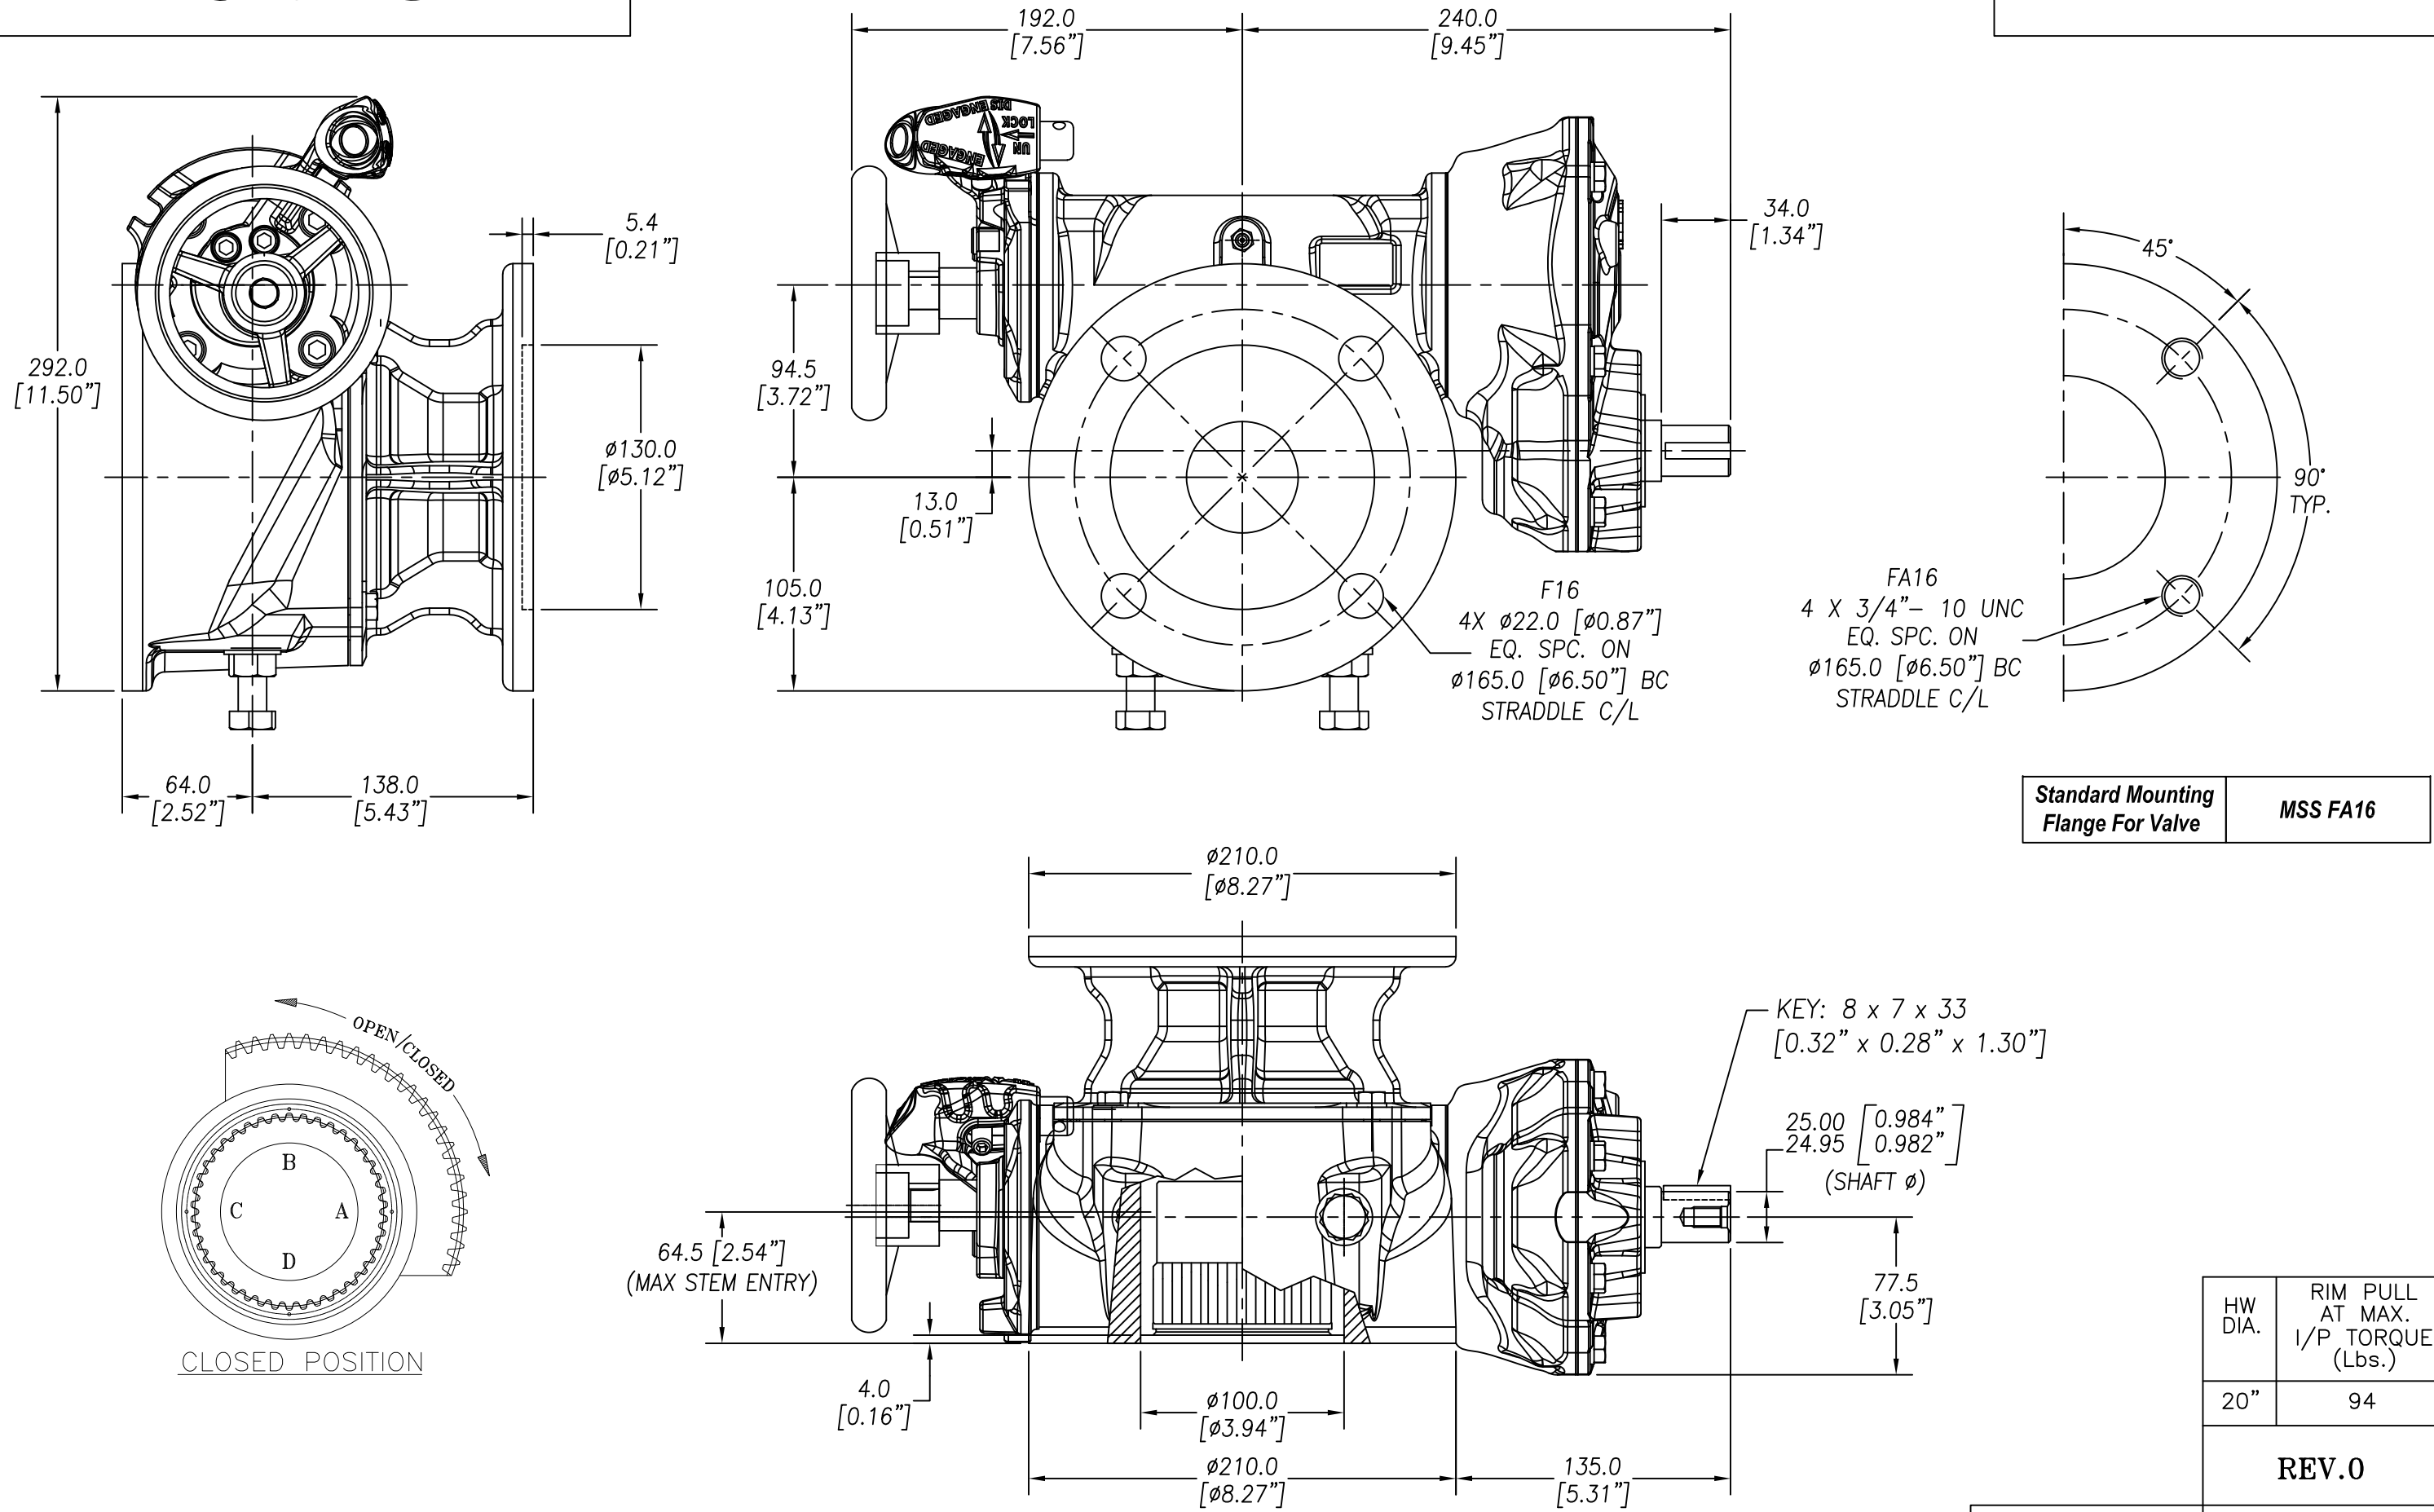

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
24,644	926	86.1:1	26.6	±20°	21.5	79	ø2-1/2" Key: 5/8" x 7/16"	2.0"	F16	FA16



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
20"	94

REV.0

C921274A 9/16/19