
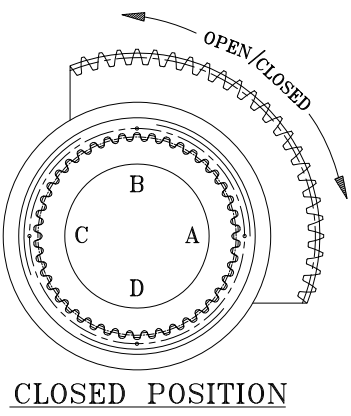


DIAMOND GEAR

240DW882

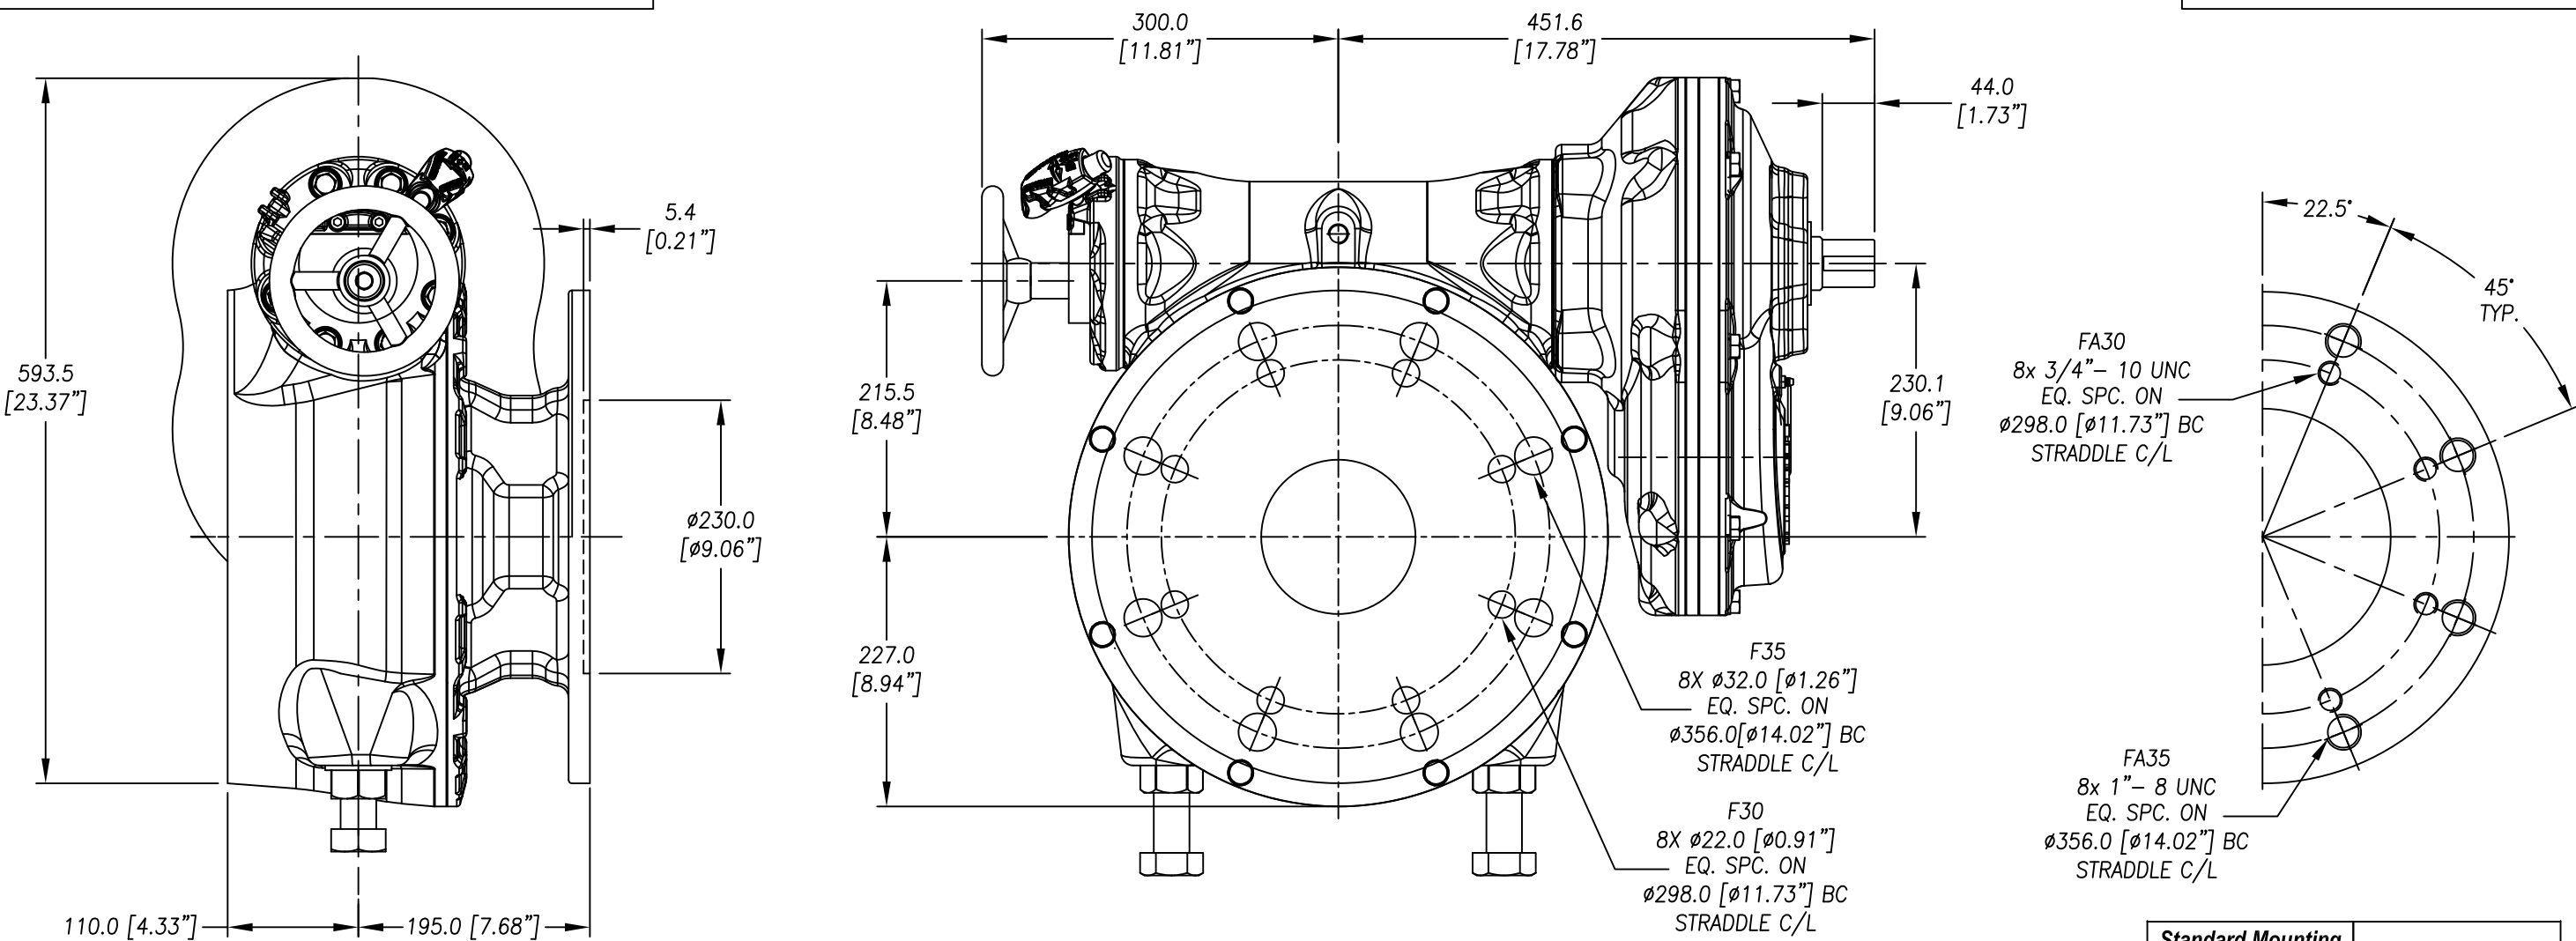

Standard Mounting
Flange For Valve

MSS FA30 & FA35

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
240,613	1,006	882:1	239	±20°	220.5	551	Ø5-1/4" Key: 1-1/4" x 7/8"	3-5/8"	F30 & F35	FA30 & FA35



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921228A	9/24/19
----------	---------

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
32"	63.8

REV.A