
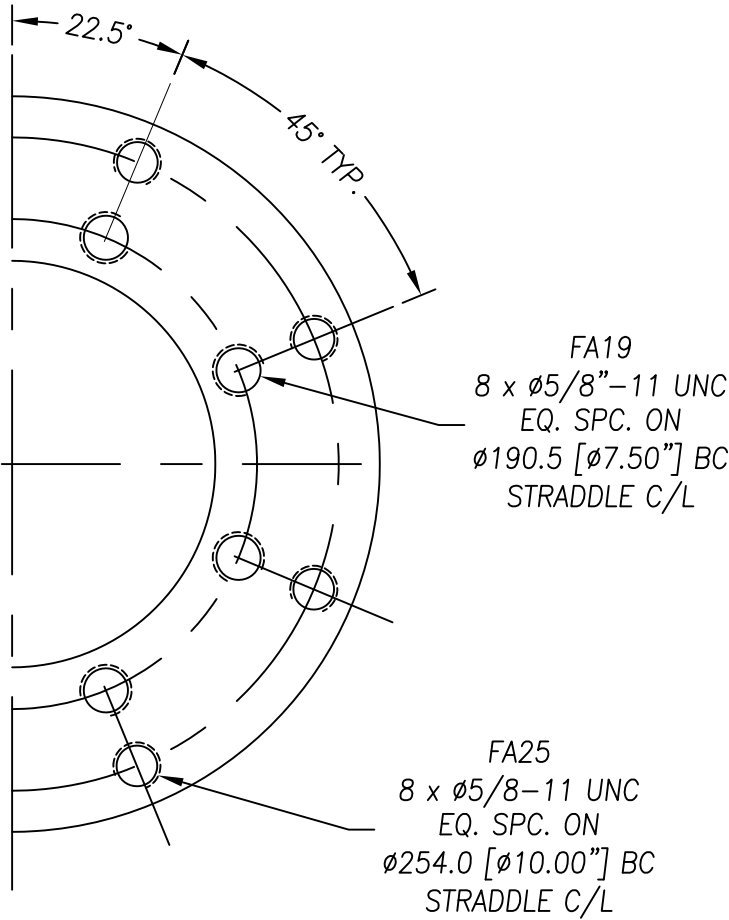
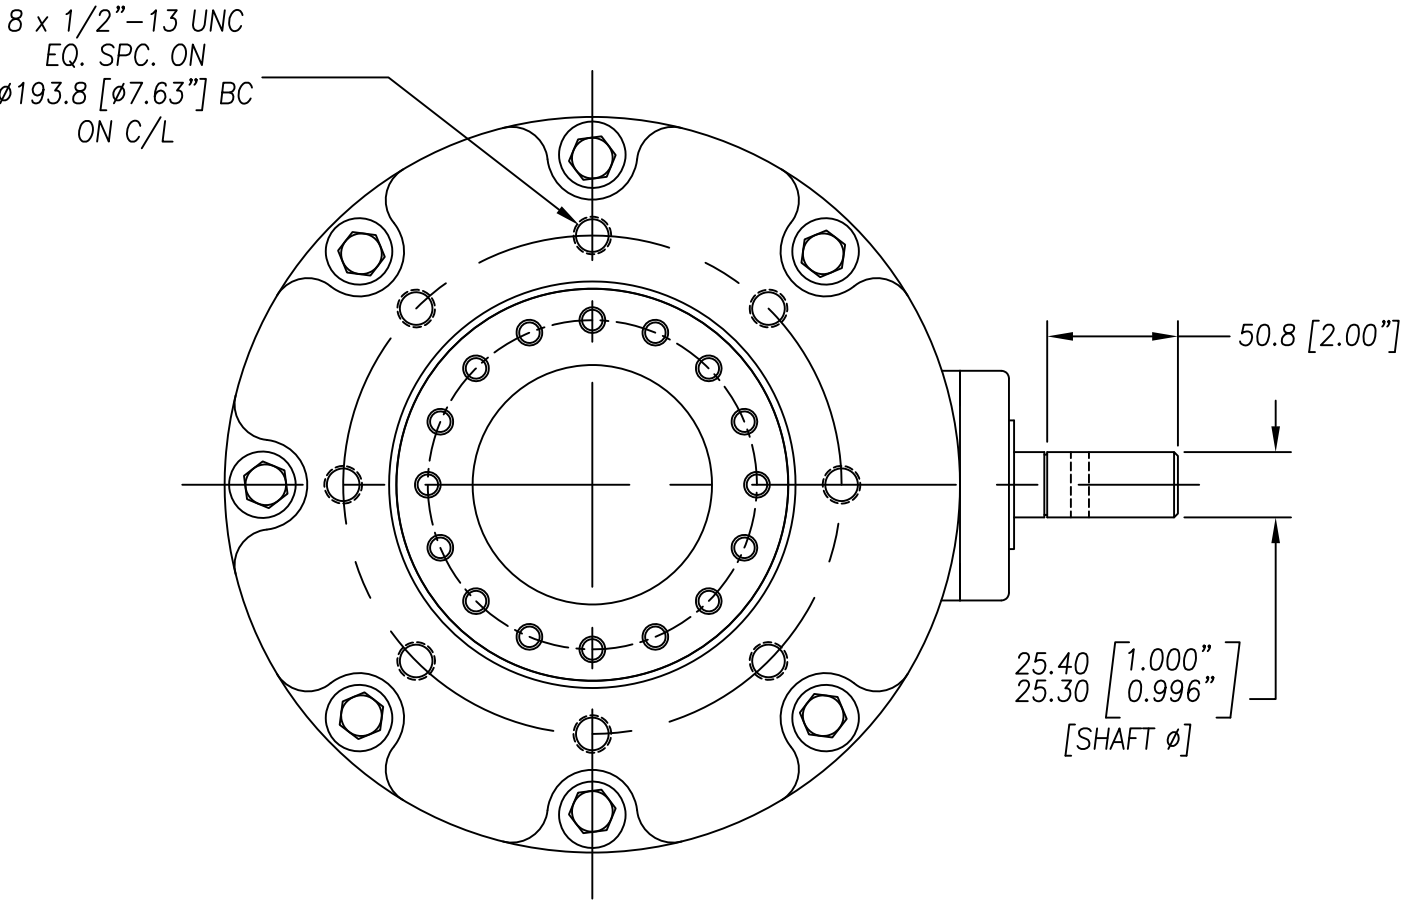
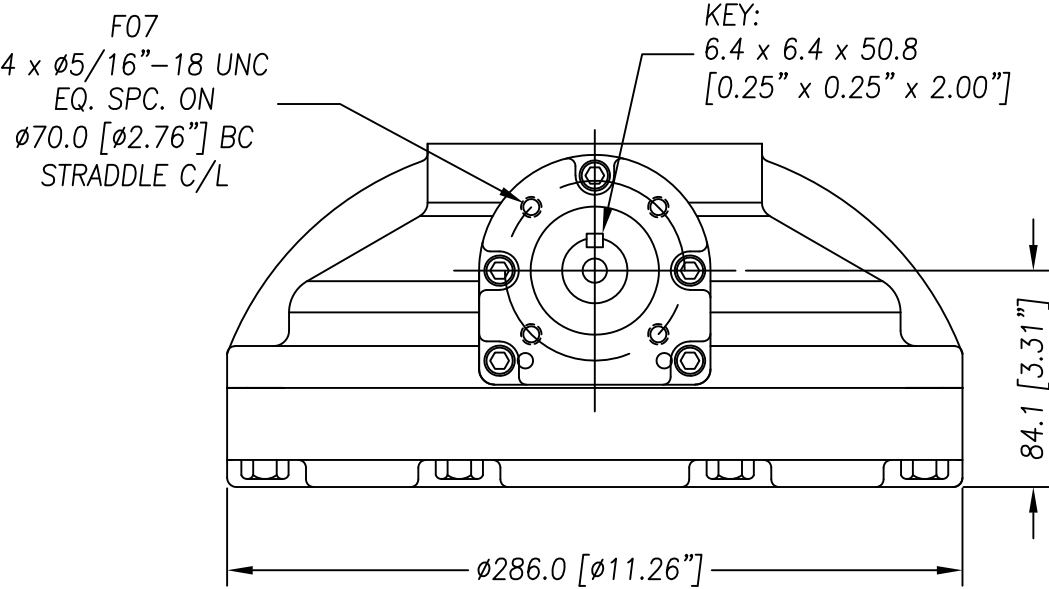


DIAMOND GEAR

24BG4.33

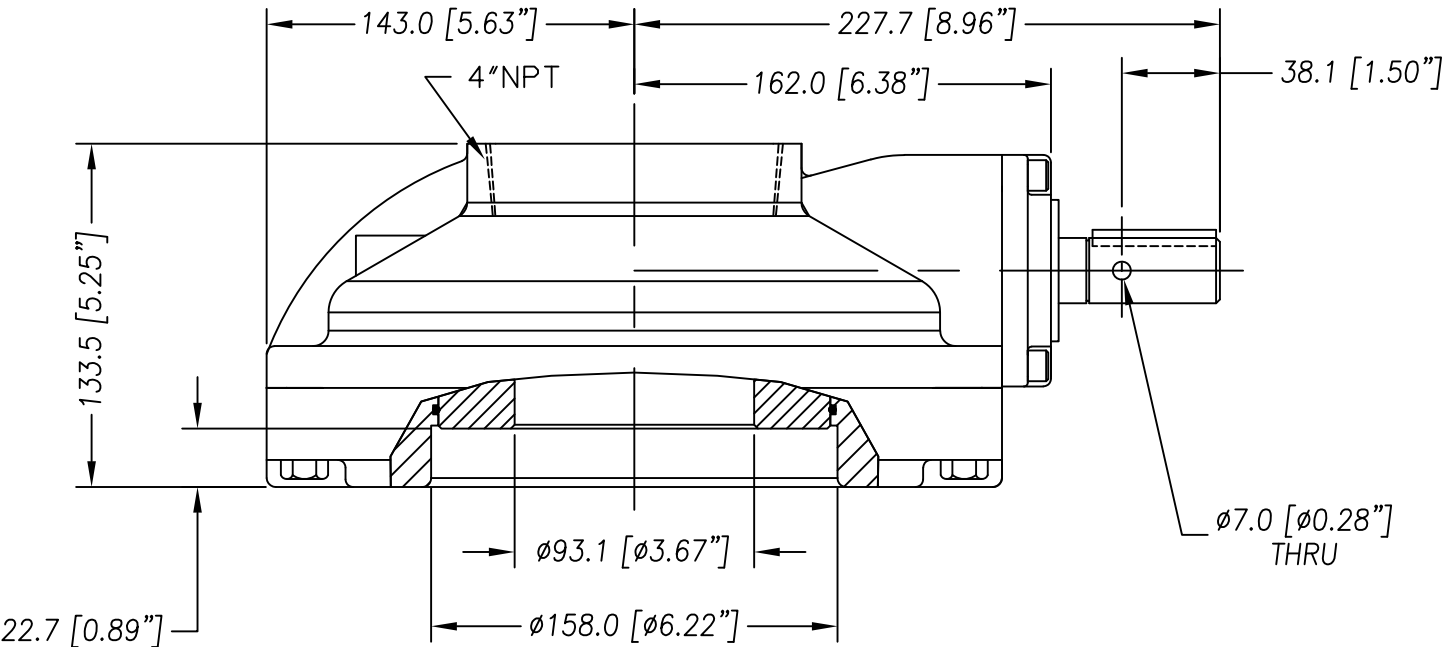

Standard Mounting Flange For Valve MSS FA19 & FA25

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [FT.LB]	MAX. INPUT TORQUE [FT.LB]	RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	DRIVE PATTERN [IN.]	INPUT SHAFT PATTERN	MAX. STEM DIAMETER FOR TORQUE APPLICATION [IN.]	MAX. STEM DIAMETER FOR THRUST APPLICATION [IN.]	MAX. MOUNTING PATTERN ON CENTERLINE [IN.]	MIN. MOUNTING PATTERN ON CENTERLINE [IN.]	STANDARD MOUNTING ON C/L OR STRADDLE C/L
2,000	513	4.33:1	3.90	80,000	65	16x3/8"-16UNC ON ø4.645" B.C.	F07	ø3.63	ø2.90	ø10.0	ø7.5	ON C/L: 8x1/2"-13 UNC ø7.63 B.C. STRADDLE C/L: FA19 & FA25



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



REV.G
C400005A
10/28/19