




UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
265,091	955	1024:1	277.5	±20°	256	353	Ø5-7/16" Key: 1-1/4"x7/8"	4-7/16"	FA30 & FA35

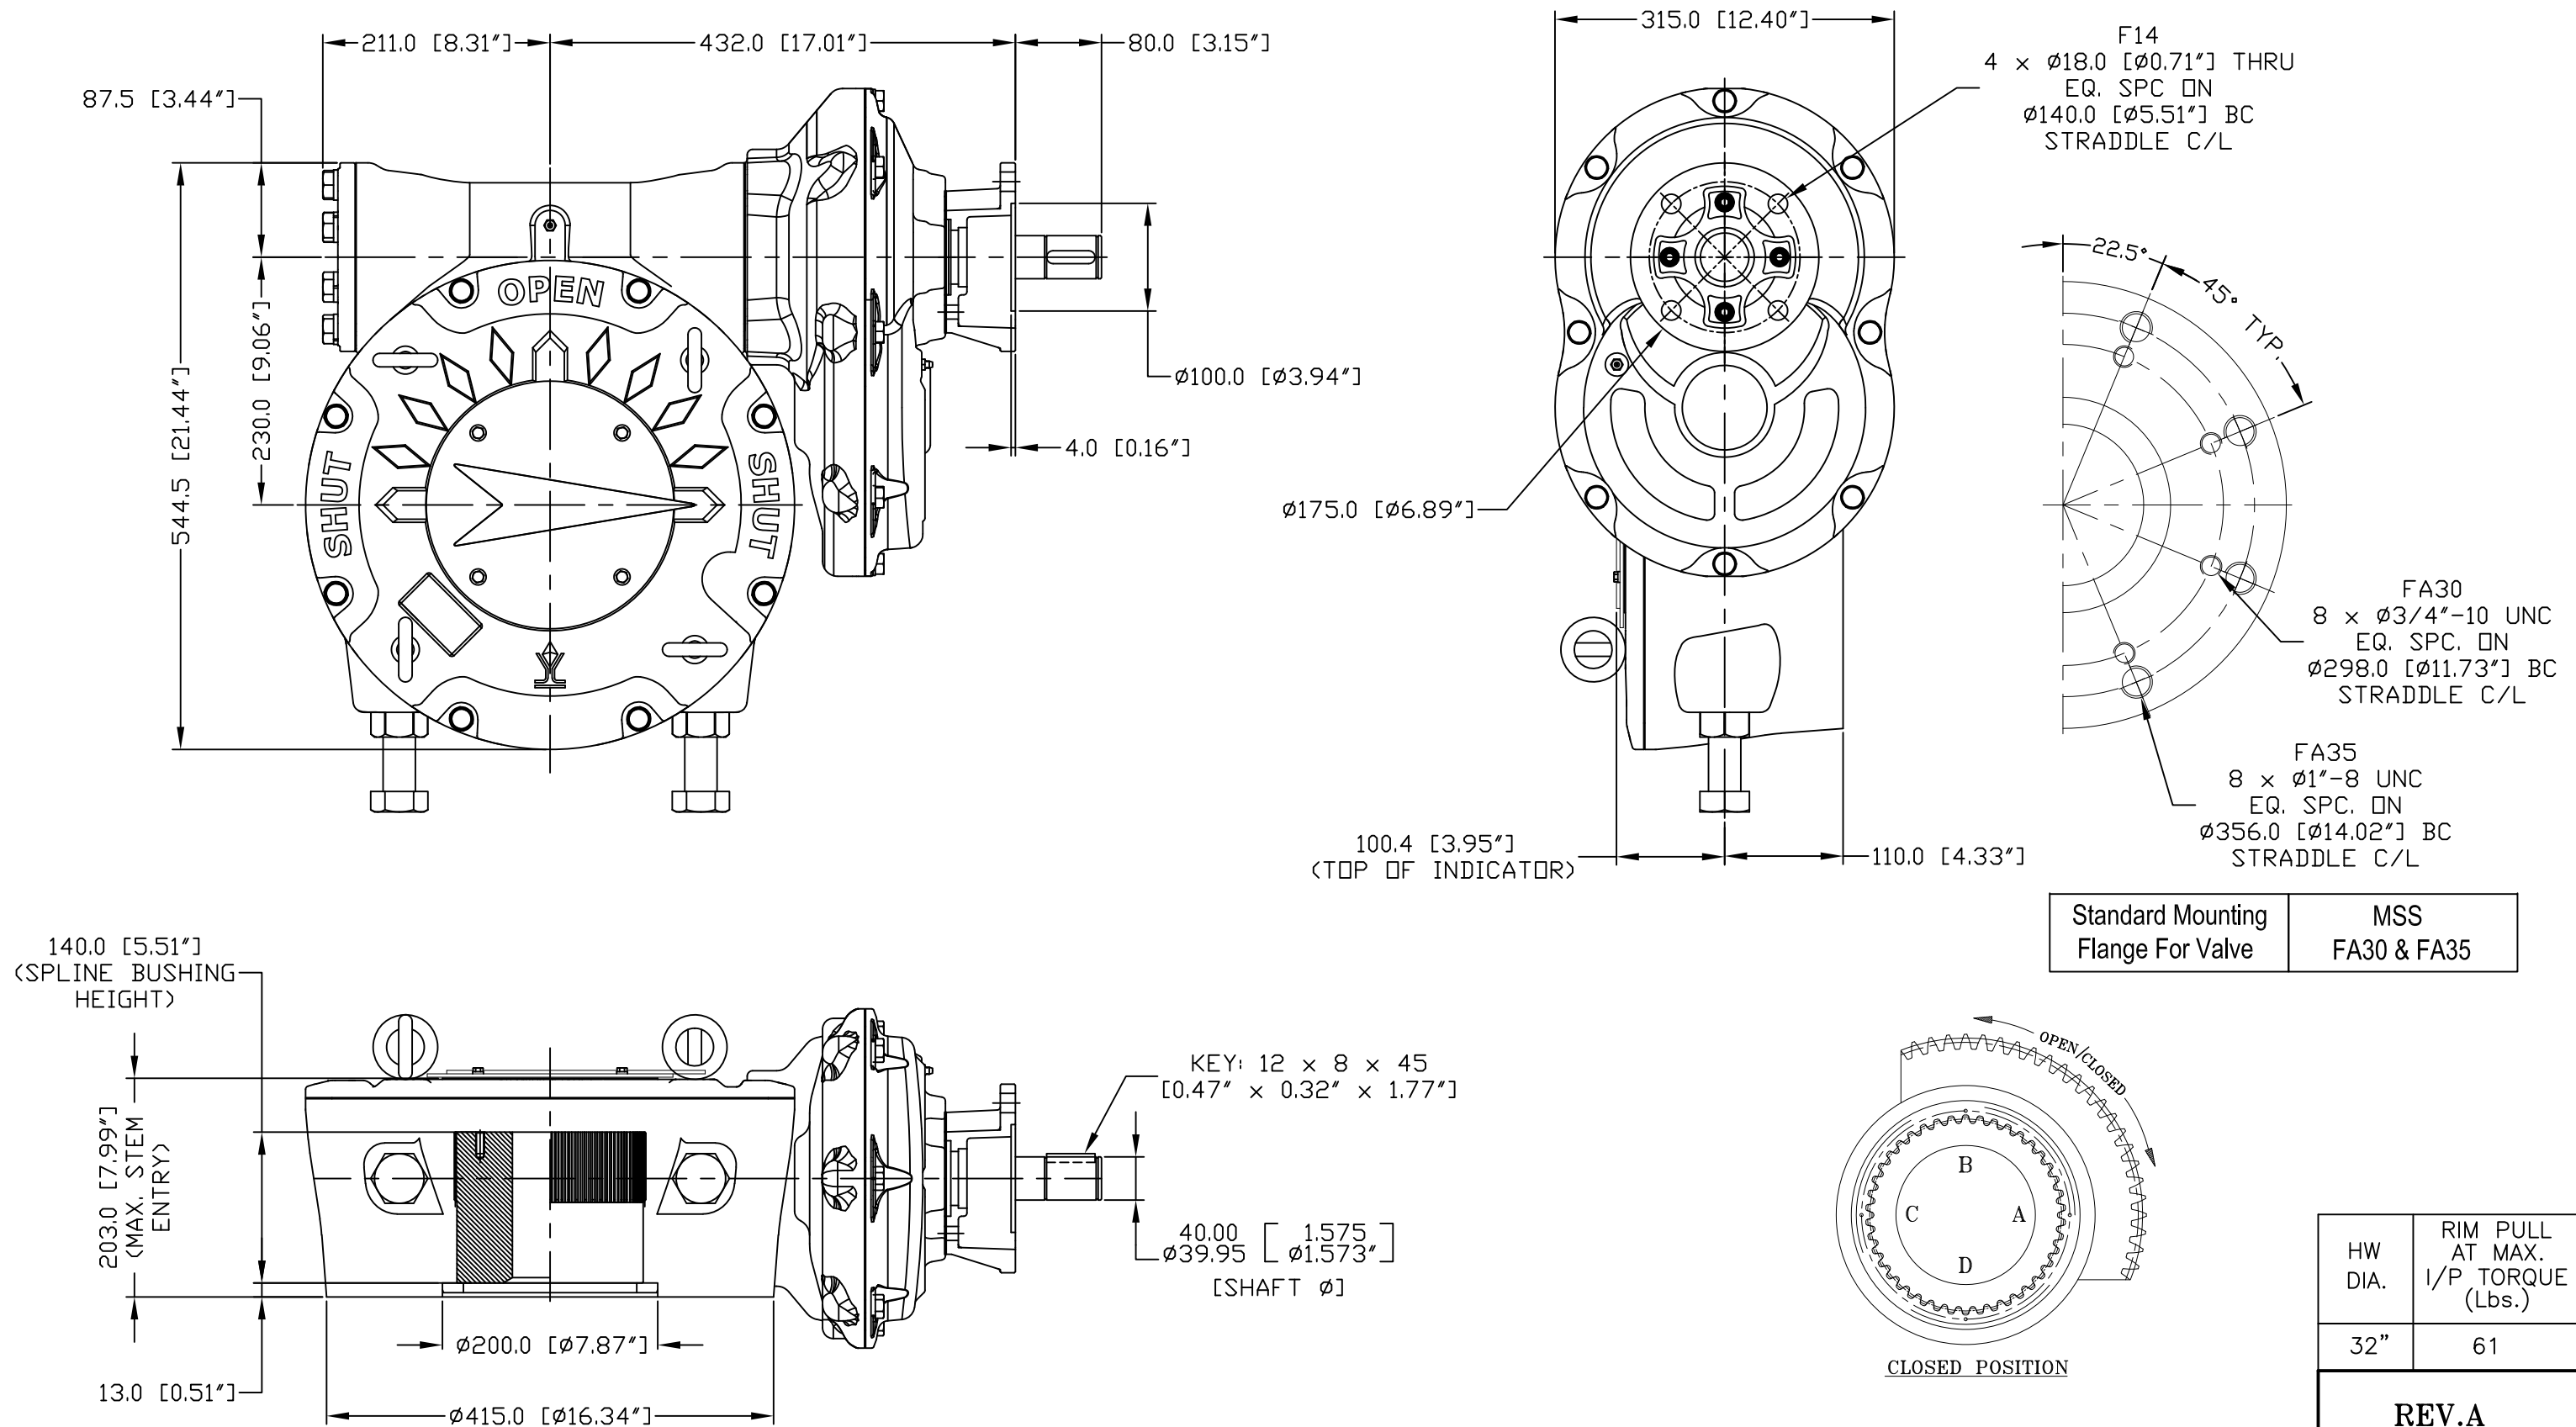

DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921242A	12/17/19
----------	----------

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
32"	61

REV.A