

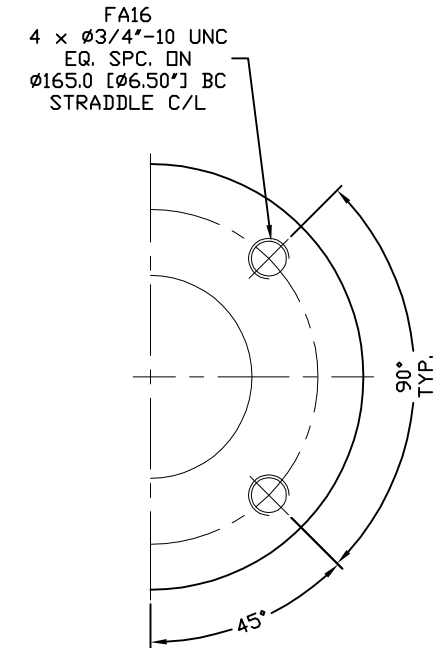
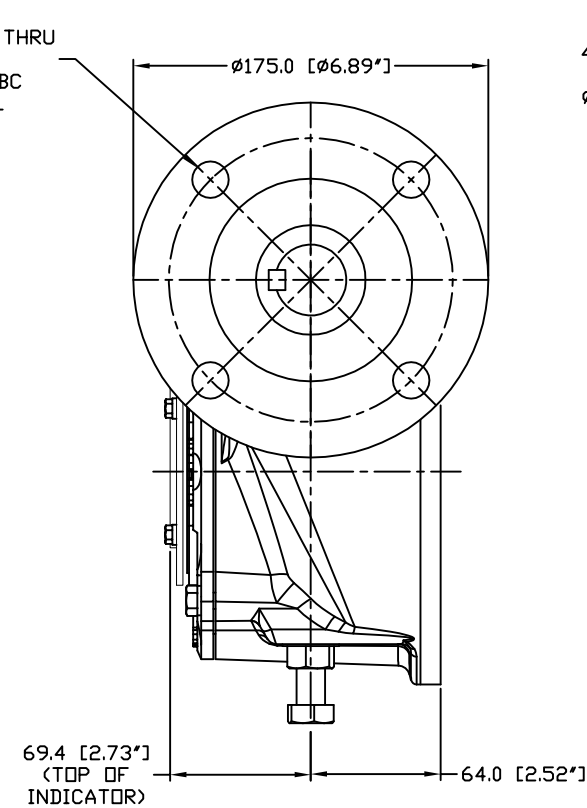
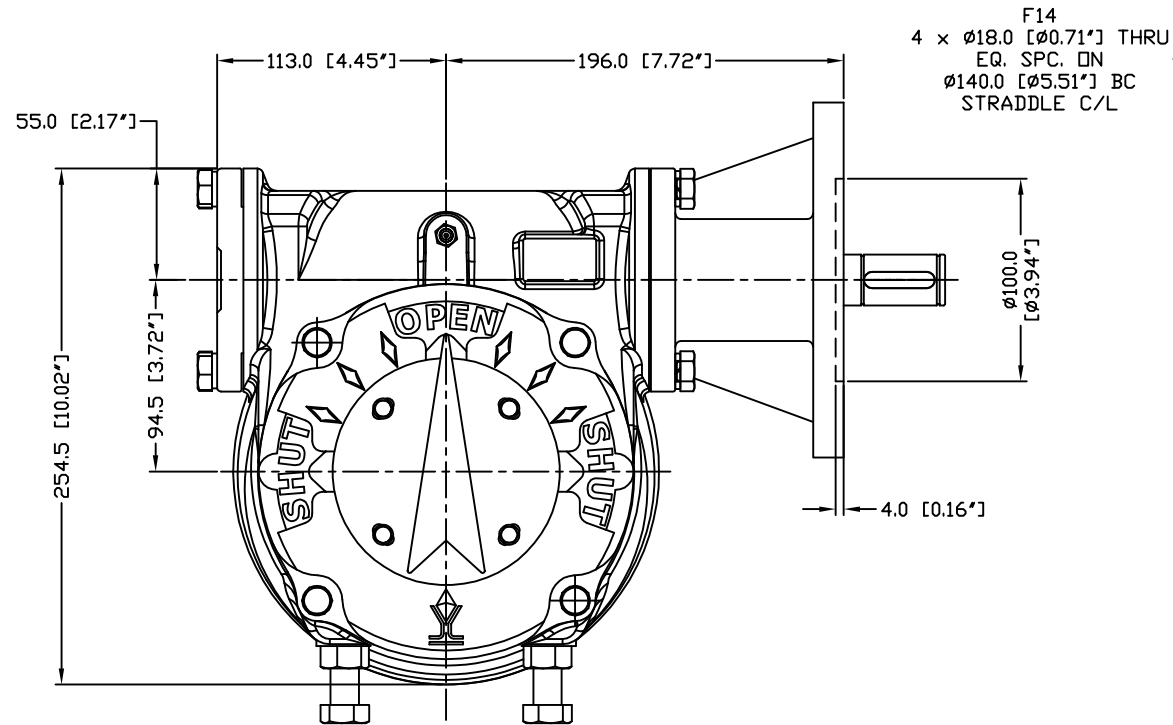


DIAMOND GEAR

28WG42-MFA



Standard Mounting Flange For Valve	MSS FA16
---------------------------------------	-------------

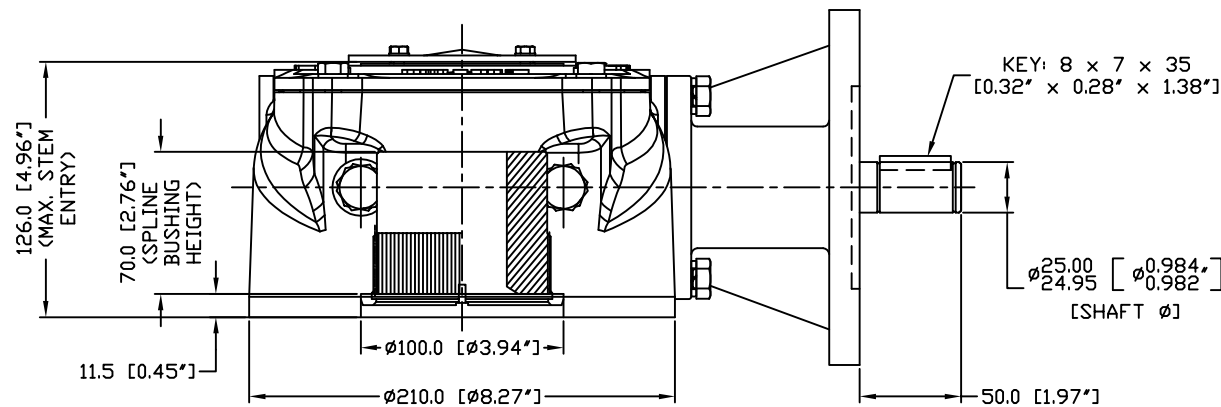

H.W. DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
20"	194

REV.A

C921249A 12/17/19

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
28,062	1,909	42:1	14.7	±20°	10.5	55	$\phi 2-1/2"$ Key: $5/8" \times 7/16"$	2.0"	FA16



CNC FLOW CONTROL

HOUSTON, TEXAS, USA

PHONE: 713-466-1644, FAX: 713-466-1715

