
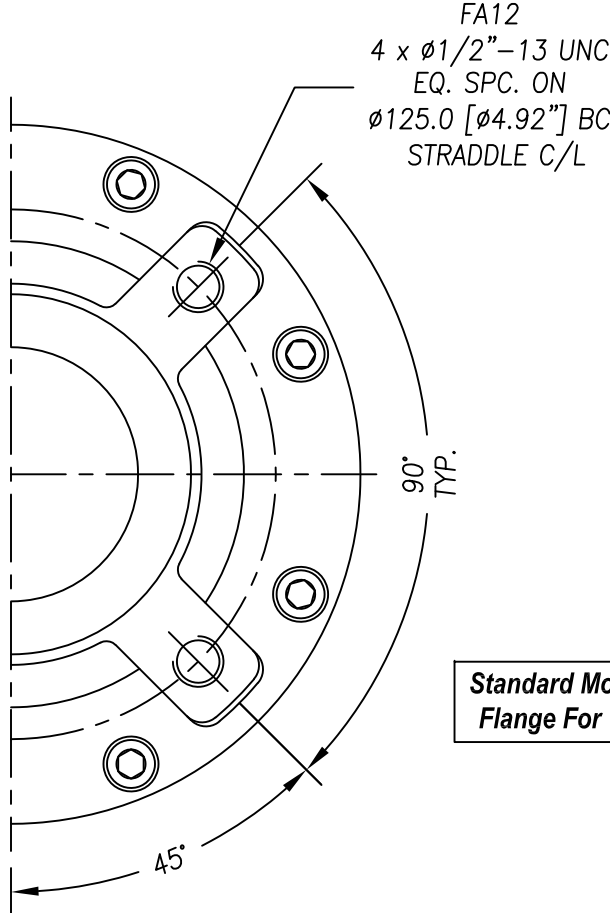
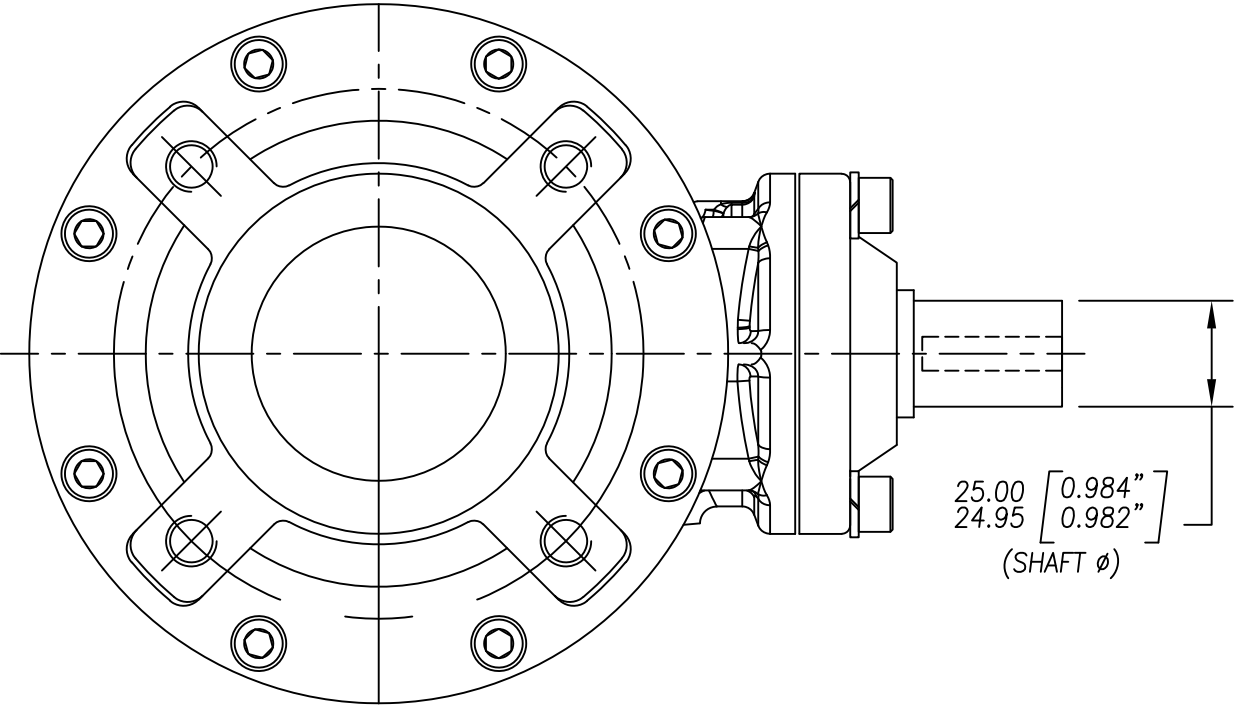
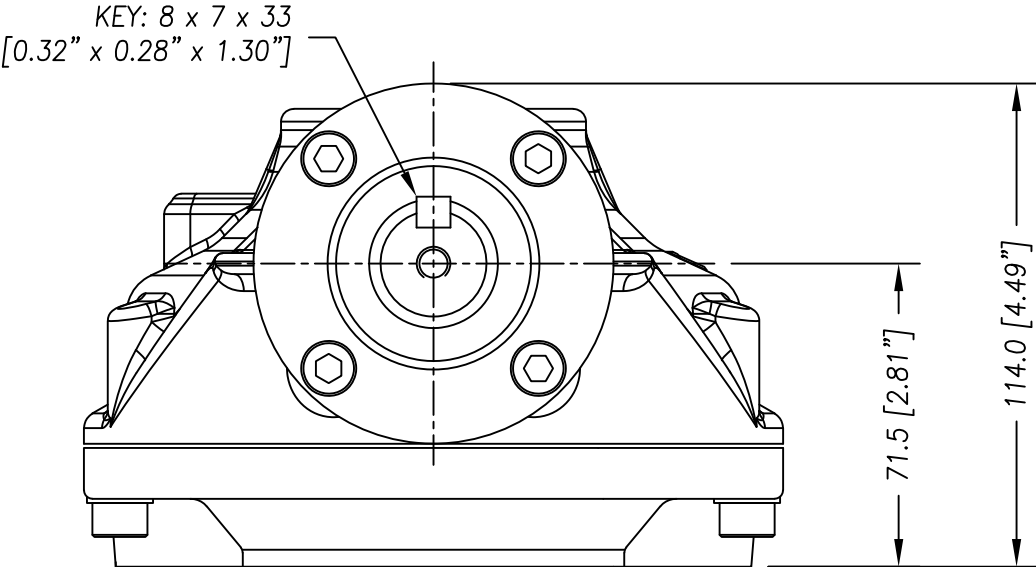


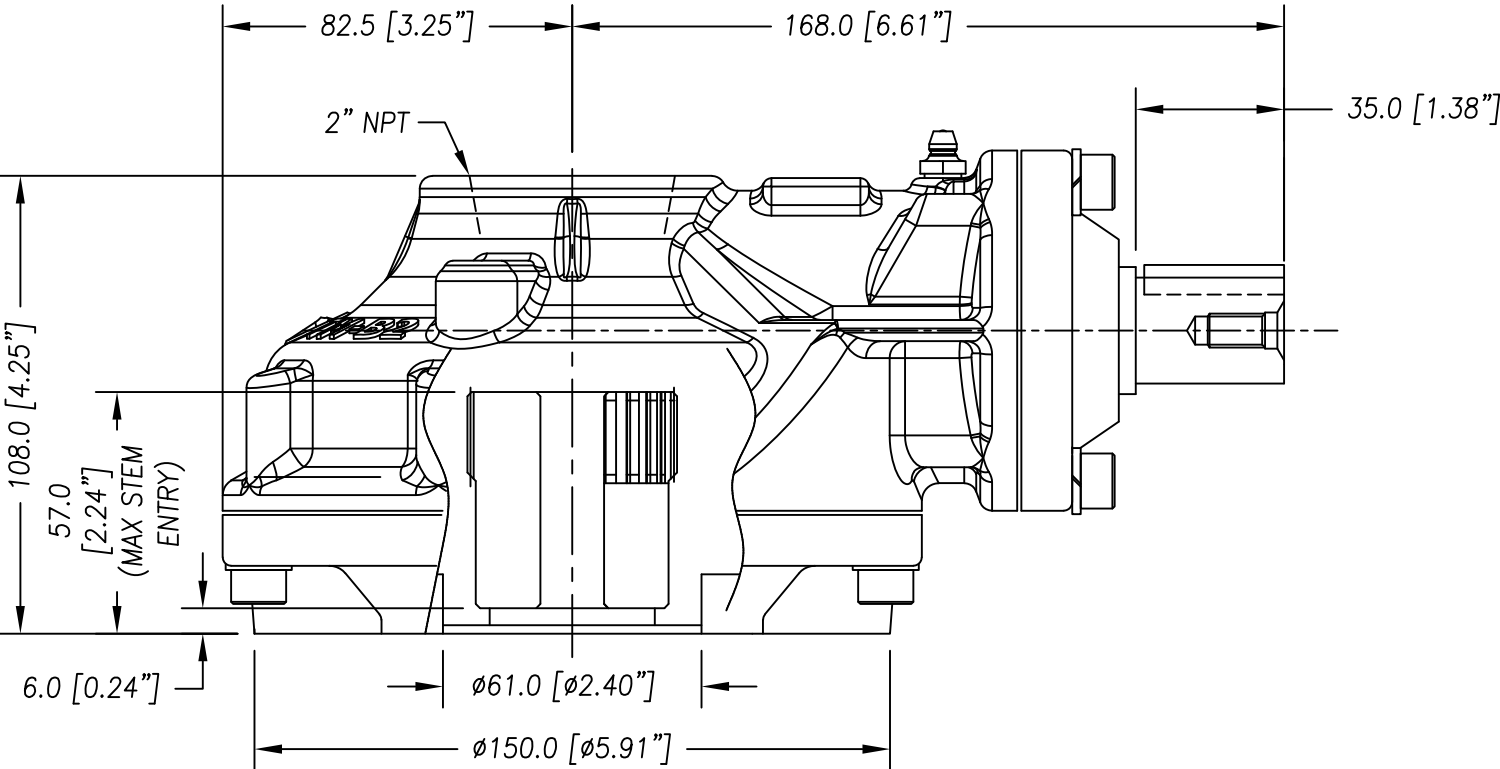

Standard Mounting
Flange For Valve

MSS FA12

UNITS: MM [Inches]

MAX. OUTPUT TORQUE		MAX. INPUT TORQUE		RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	MAX ROUND BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
[FT.LB]	[IN.LB]	[FT.LB]	[IN.LB]						
308.0	3,696	113.8	1,366	3:1	2.7	25,335	26.5	$\phi 1-1/4$ " KEY: 1/4" X 3/16"	FA12

REV.0

C921259A

10/28/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

