
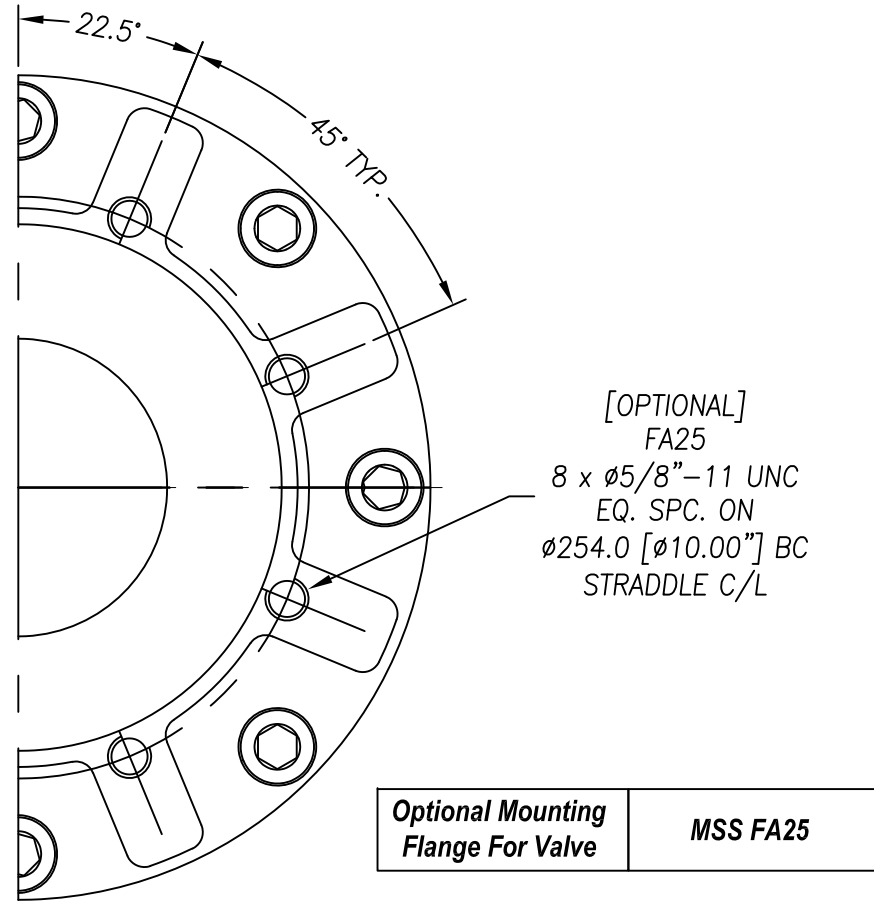
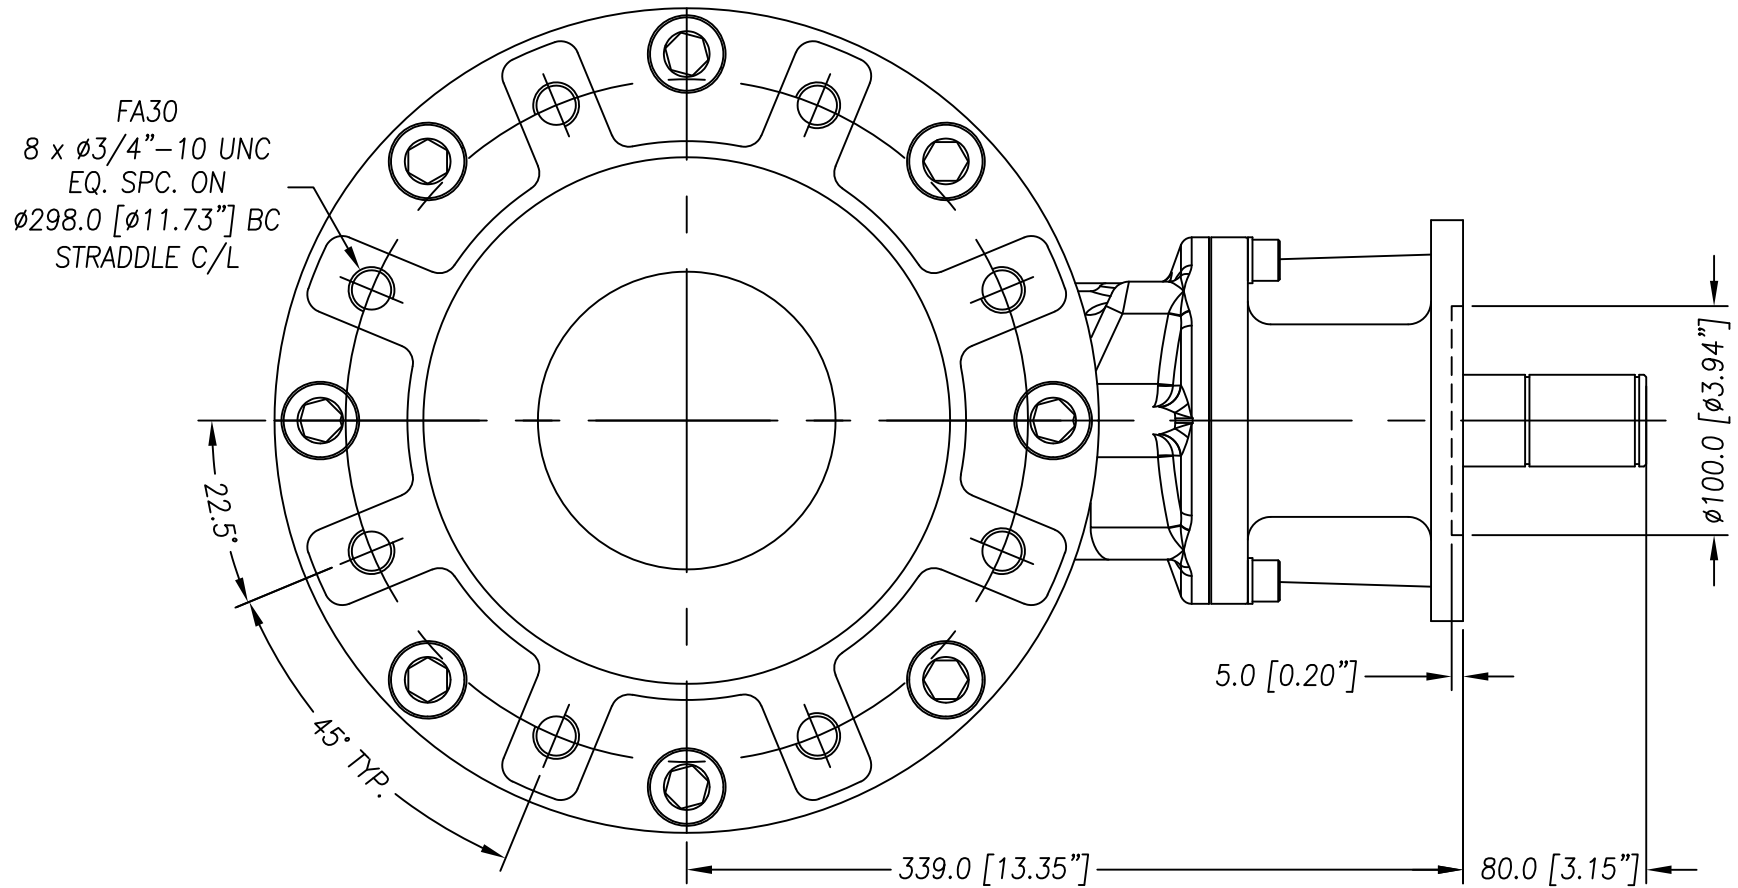
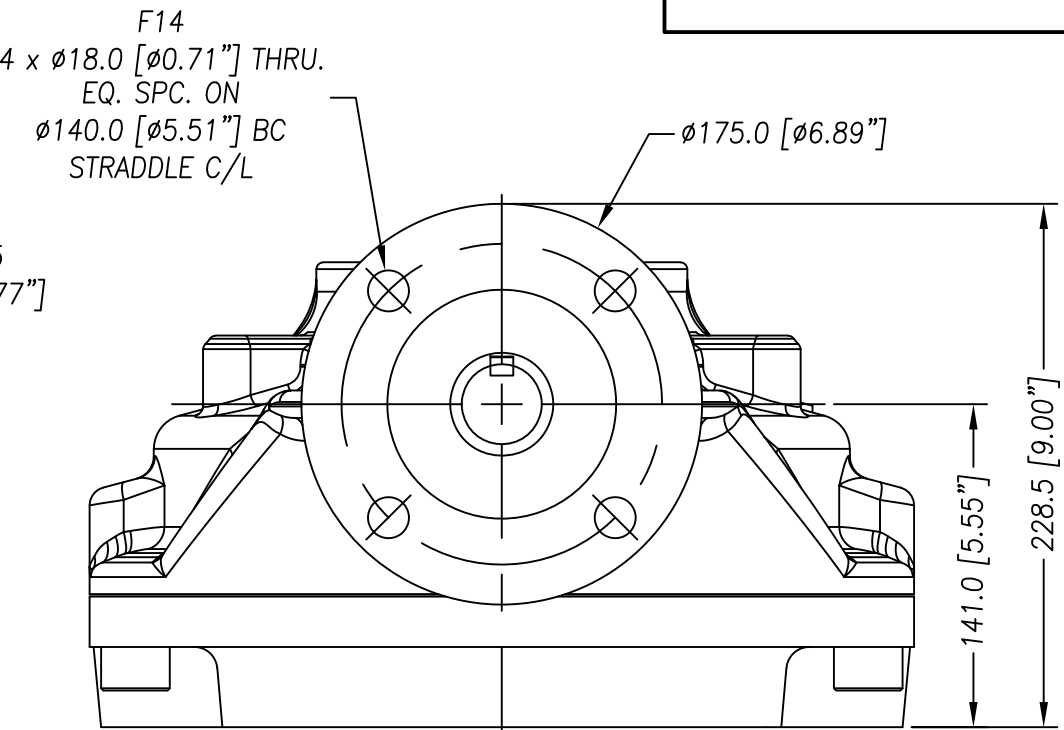


DIAMOND GEAR

33BG5.5

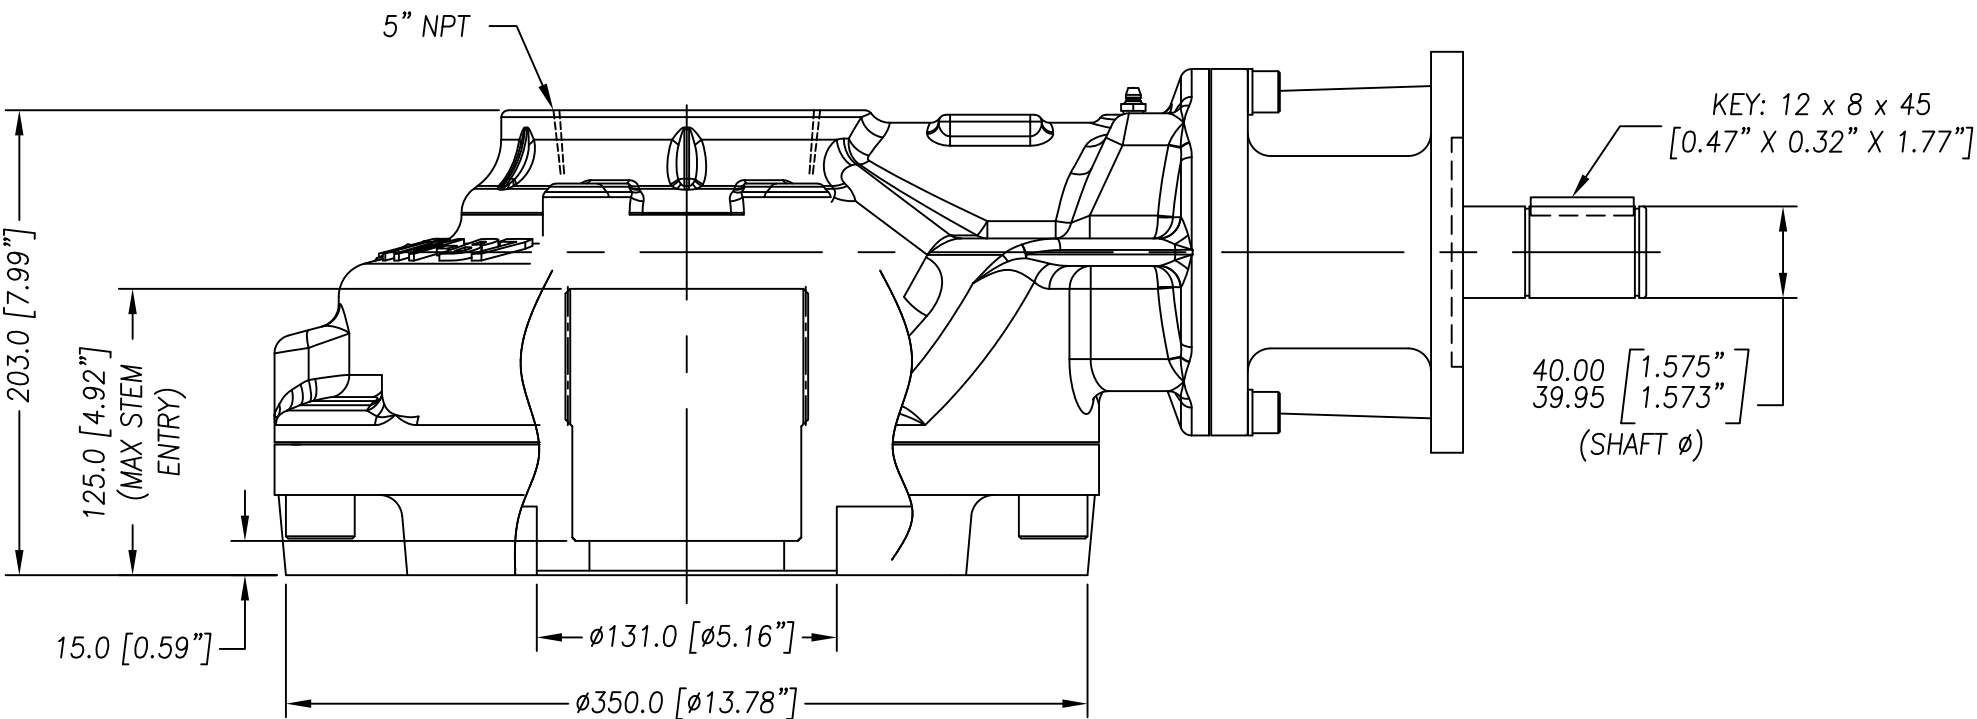

Optional Mounting Flange For Valve

MSS FA25

UNITS: MM [Inches]

| MAX. OUTPUT TORQUE |         | MAX. INPUT TORQUE |         | RATIO | MECHANICAL ADVANTAGE | THRUST [LB] | WEIGHT [LB] | MAX ROUND BORE [IN.]      | FLANGE MOUNTING STRADDLE C/L       |
|--------------------|---------|-------------------|---------|-------|----------------------|-------------|-------------|---------------------------|------------------------------------|
| [FT.LB]            | [IN.LB] | [FT.LB]           | [IN.LB] |       |                      |             |             |                           |                                    |
| 2,754              | 33,048  | 551               | 6,610   | 5.5:1 | 5.0                  | 79,309      | 181         | Ø3.0"<br>KEY: 3/4" x 1/2" | FA25 (OPTIONAL)<br>FA30 (STANDARD) |

REV.A

C921235A

10/1/20



**DIAMOND GEAR**  
HOUSTON, TEXAS, USA  
PHONE: 713-590-0270

