
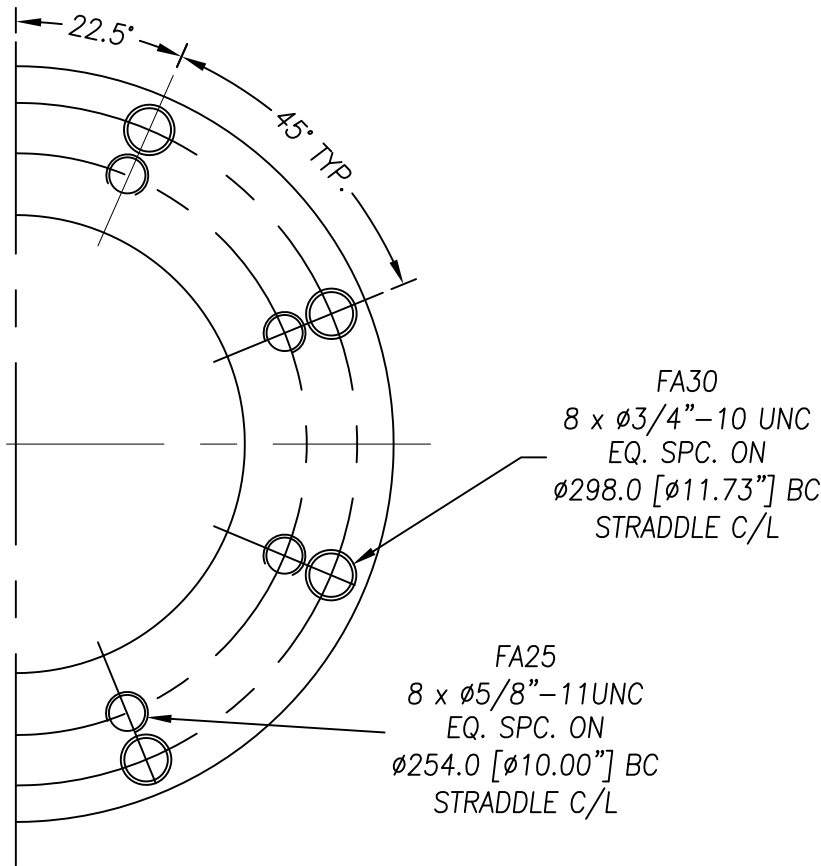
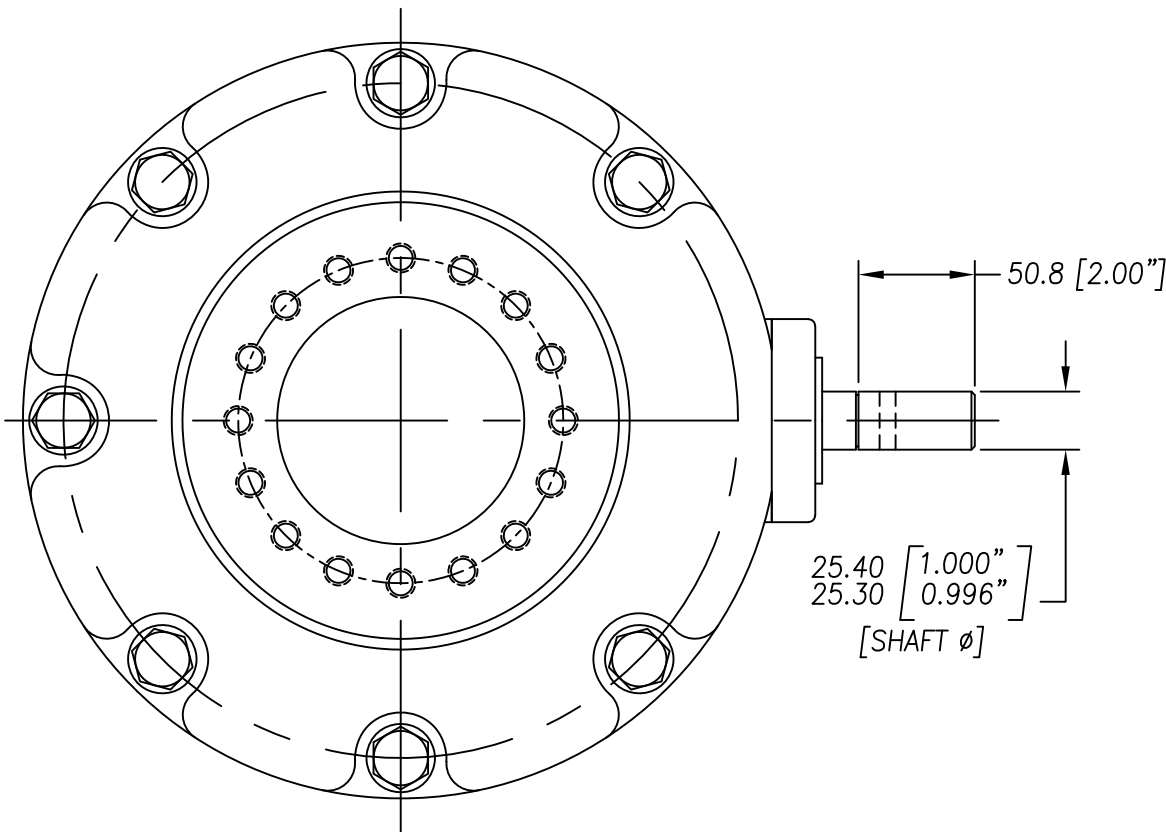
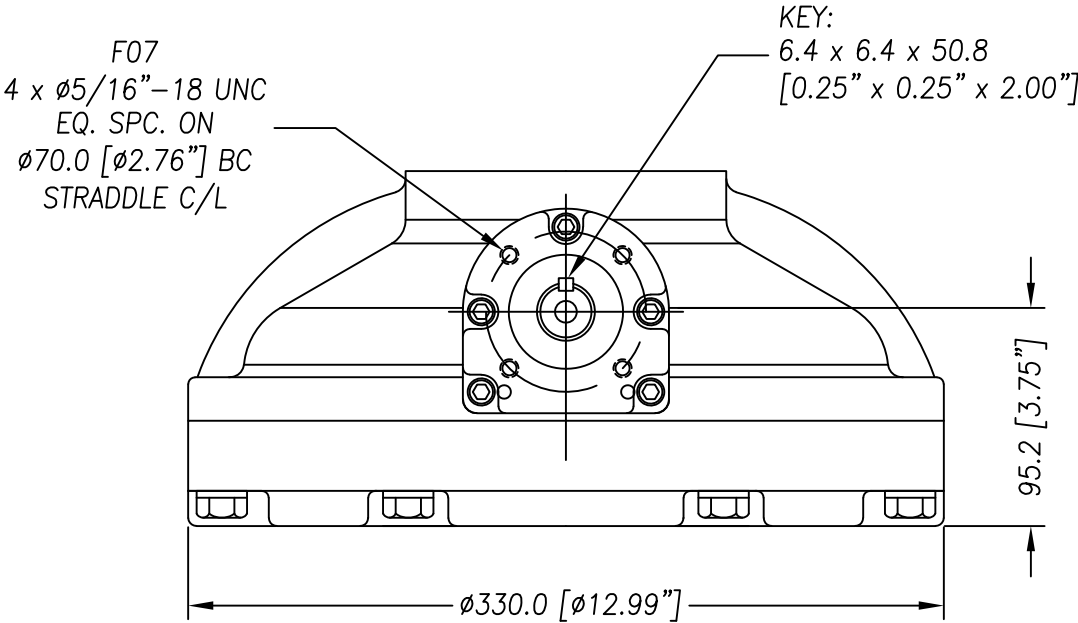


DIAMOND GEAR

36BG5.17

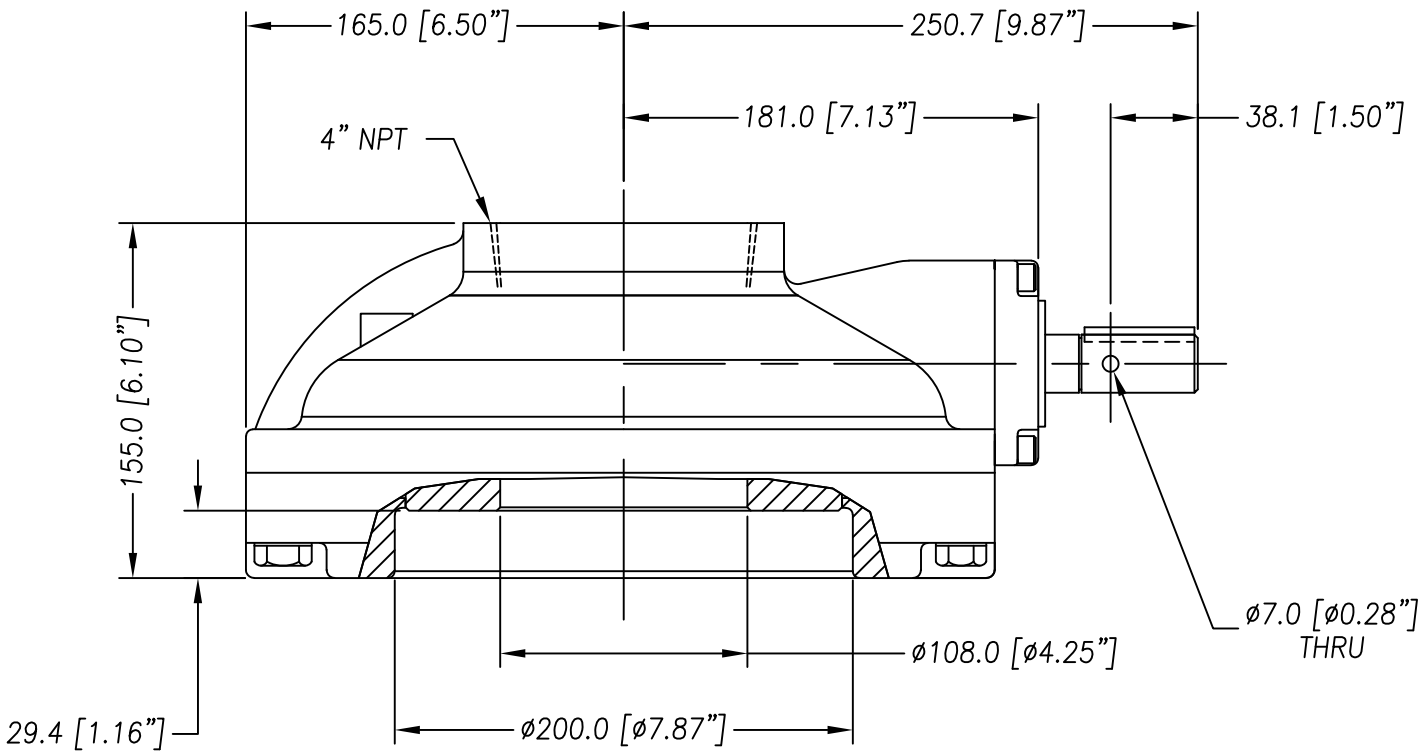

Standard Mounting
Flange For Valve

MSS FA25 (STD)
MSS FA30 (OPT)

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [FT.LB]	MAX. INPUT TORQUE [FT.LB]	RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	DRIVE PATTERN [IN.]	INPUT SHAFT PATTERN	MAX. STEM DIAMETER FOR TORQUE APPLICATION [IN.]	MAX. STEM DIAMETER FOR THRUST APPLICATION [IN.]	MAX. MOUNTING PATTERN ON CENTERLINE [IN.]	MIN. MOUNTING PATTERN ON CENTERLINE [IN.]	STANDARD MOUNTING STRADDLE C/L
3,000	645	5.17:1	4.65	110,000	98	16x1/2"-13UNC ON $\phi 5.590"$ B.C.	F07	$\phi 3.88$	$\phi 3.50$	$\phi 11.50$	$\phi 9.50$	FA25 (STANDARD) FA30 (OPTIONAL)

C400007A

REV.F

10/28/19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

