
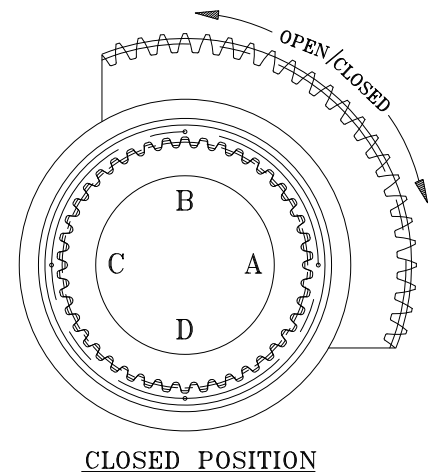
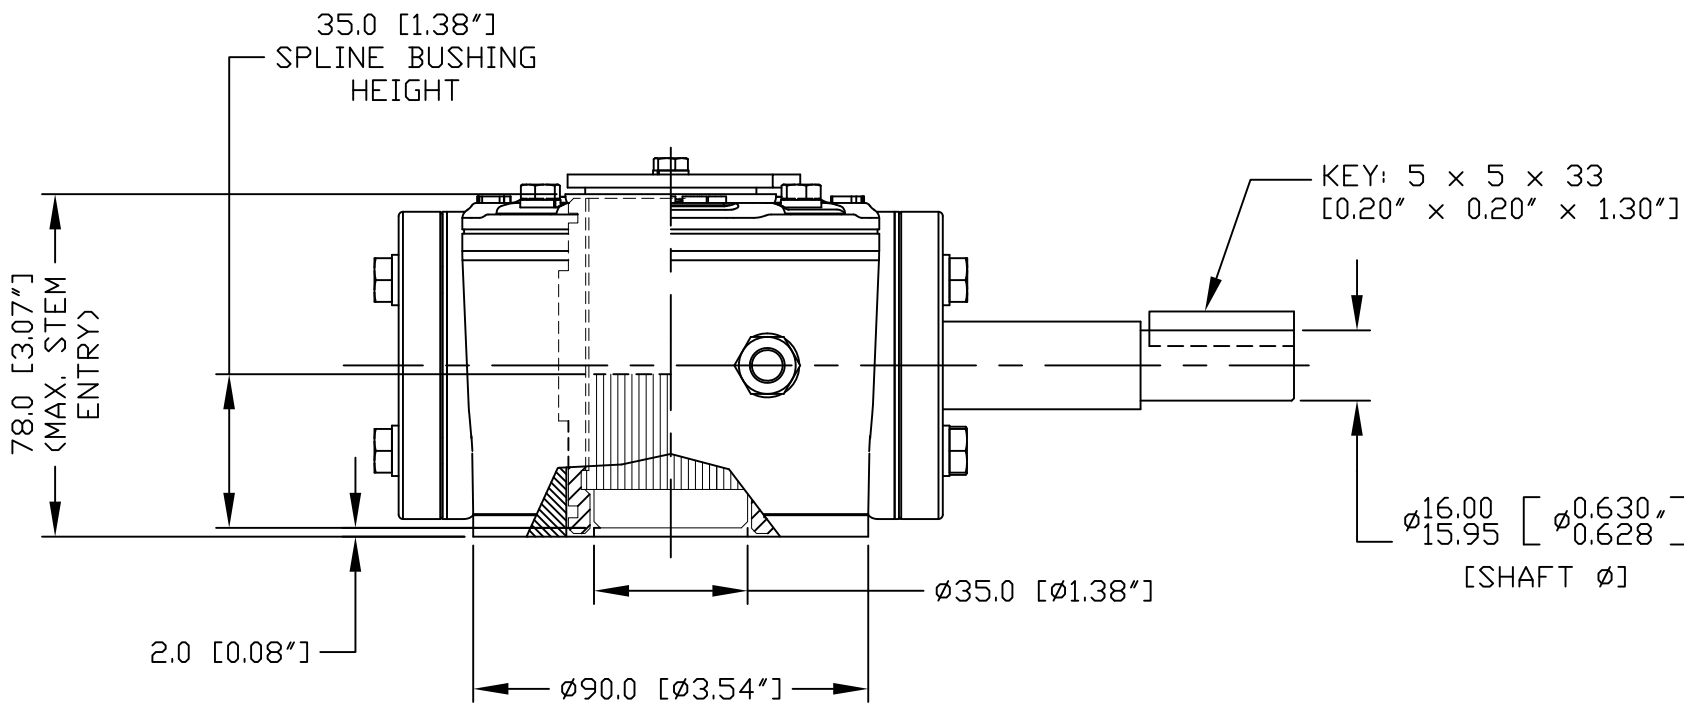
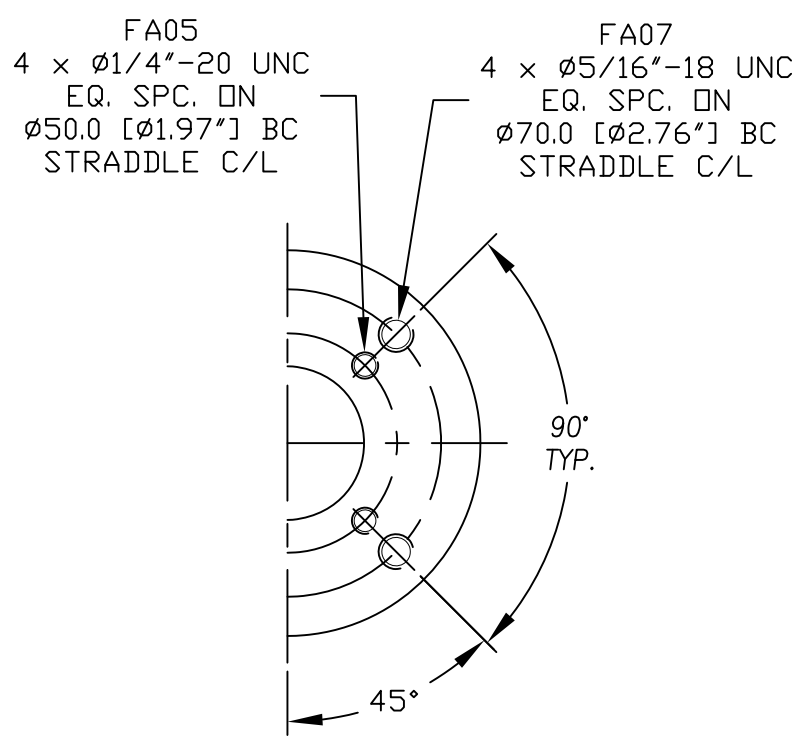


DIAMOND GEAR

3WG32

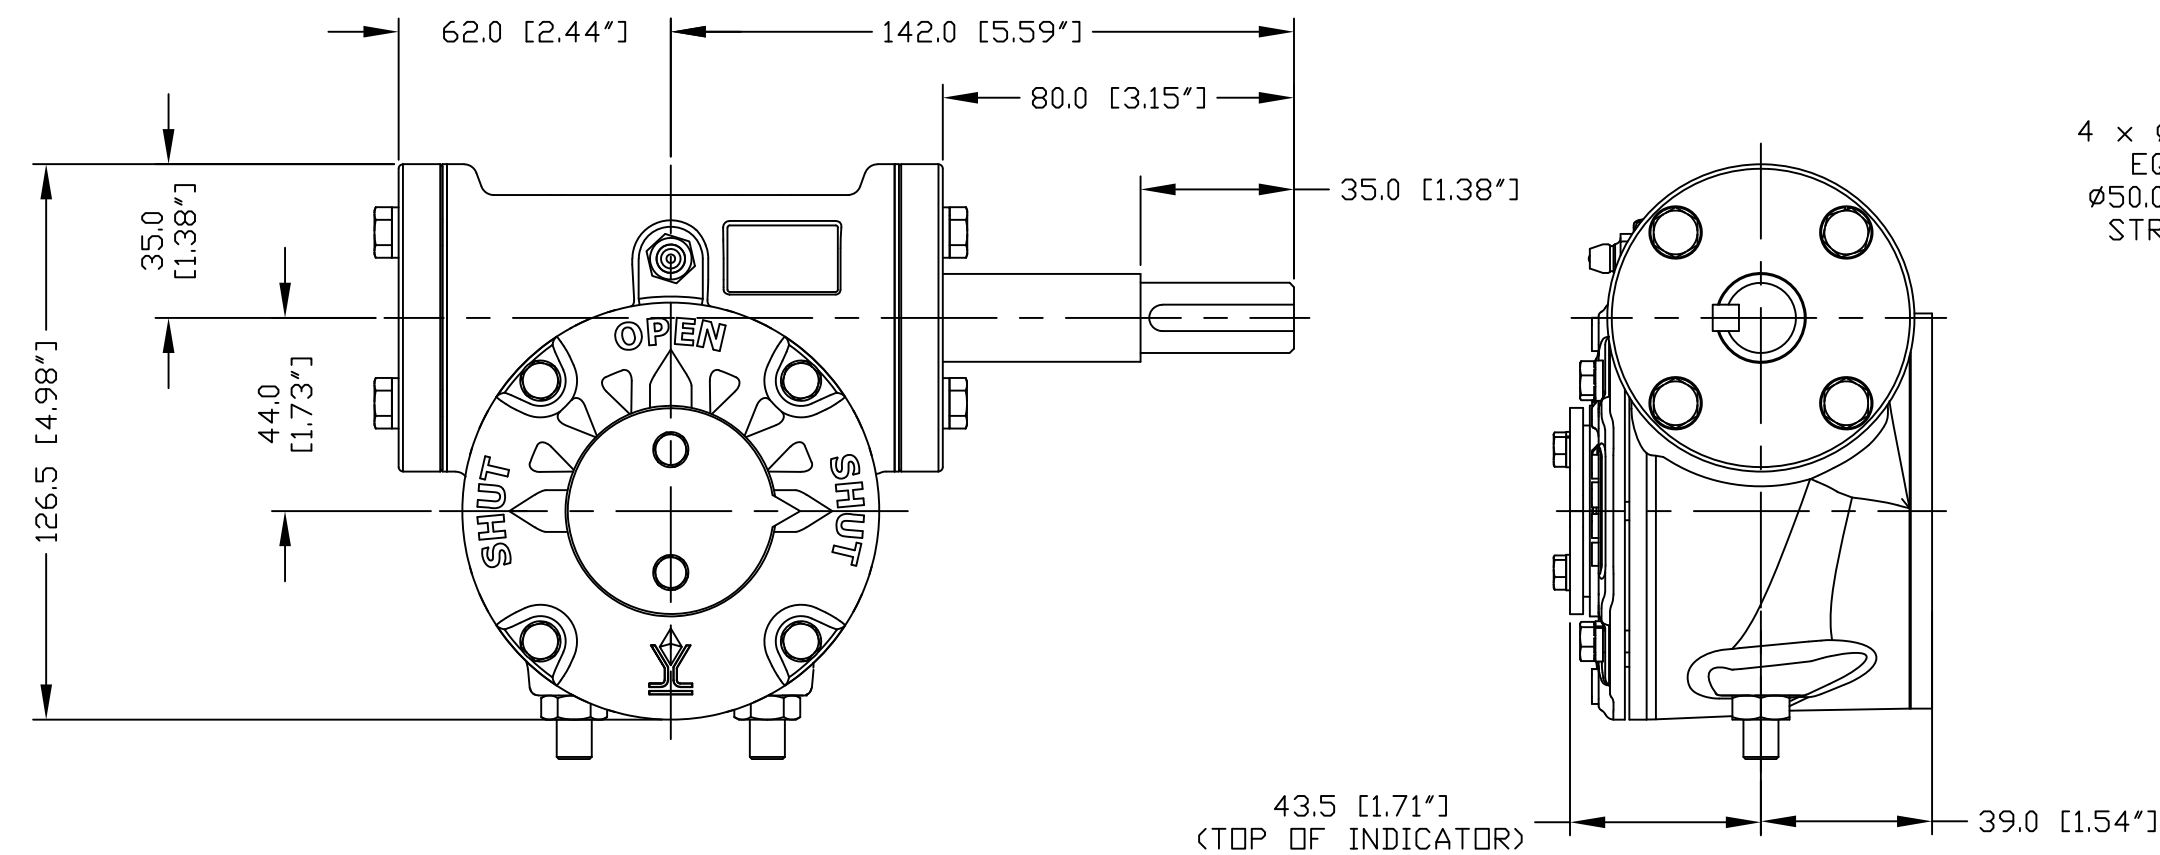

Standard Mounting Flange For Valve	MSS FA05 & FA07
---------------------------------------	--------------------

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
6"	81

UNITS: MM [Inches]									
MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
2,848	254	32:1	11.2	±5°	8	5	$\text{ø}3/4\"$ Key: 3/16\" x 3/16"	9/16"	FA05 & FA07



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



REV.B
C921207A 12/17/19