

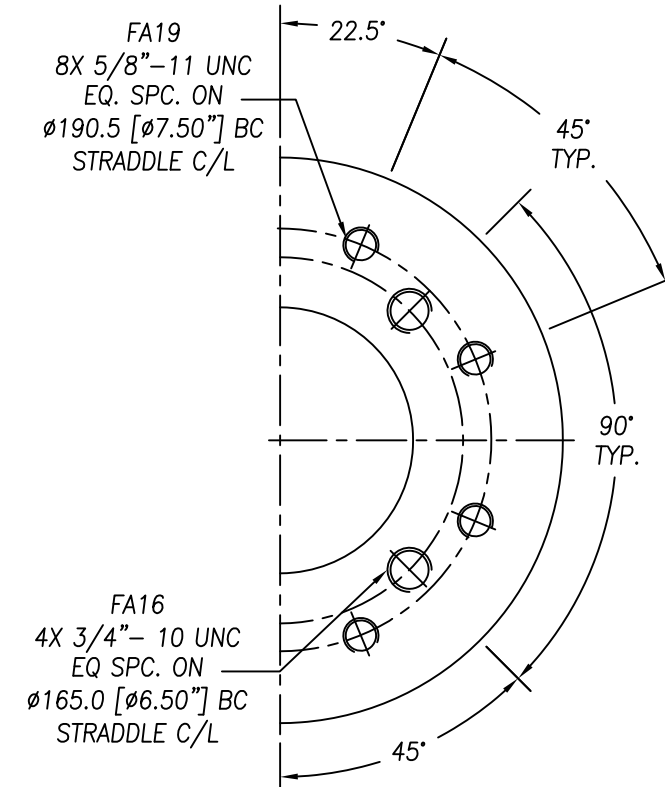
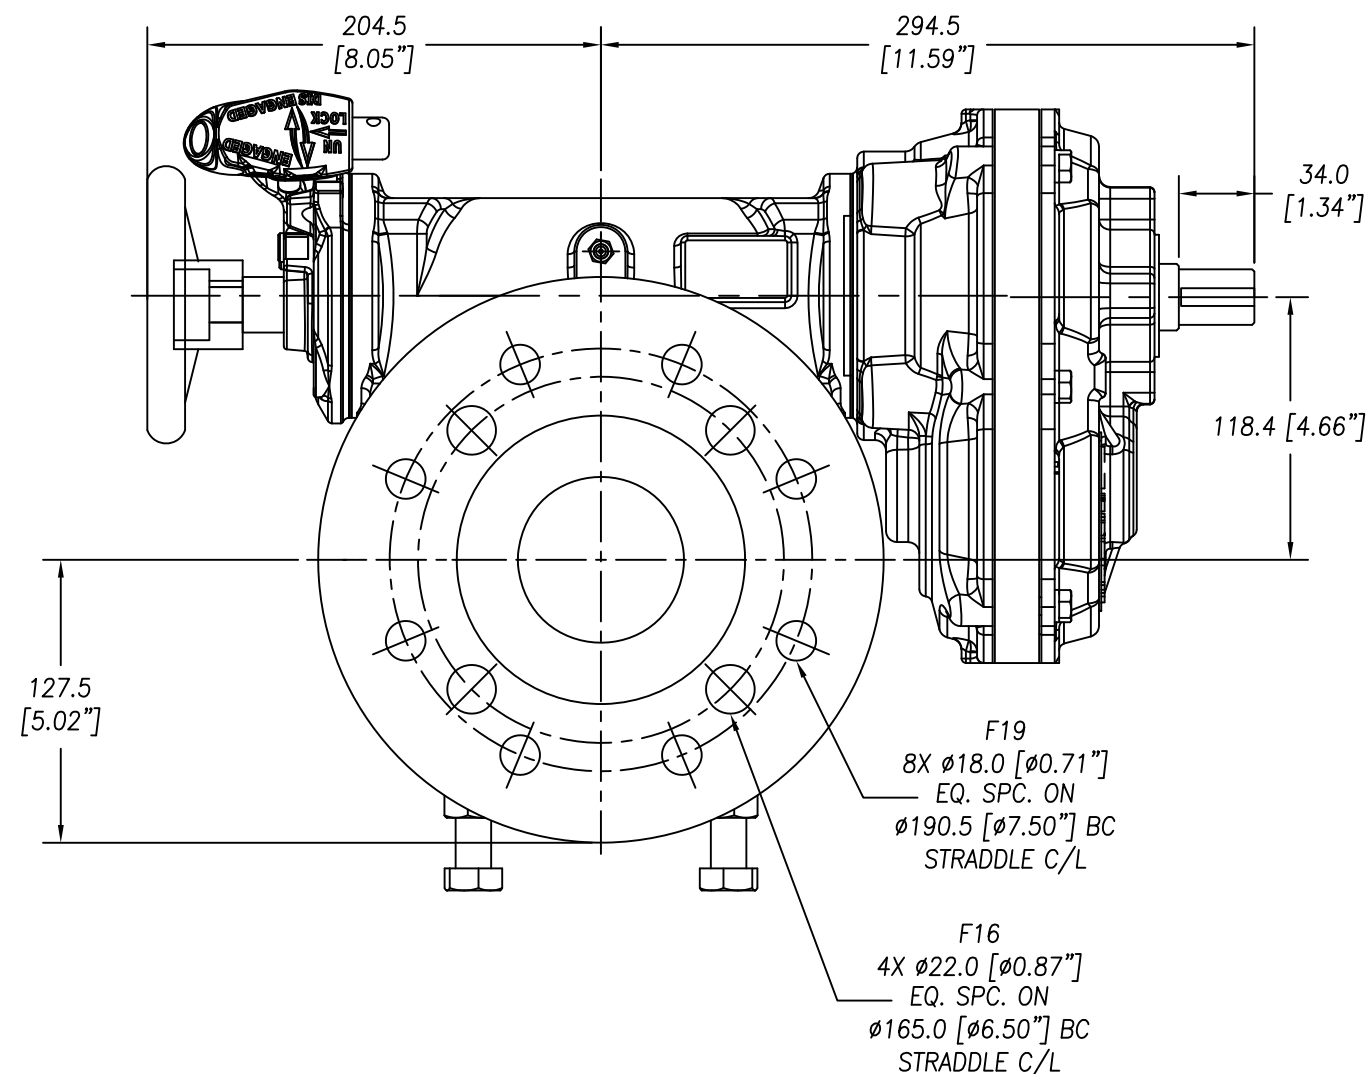
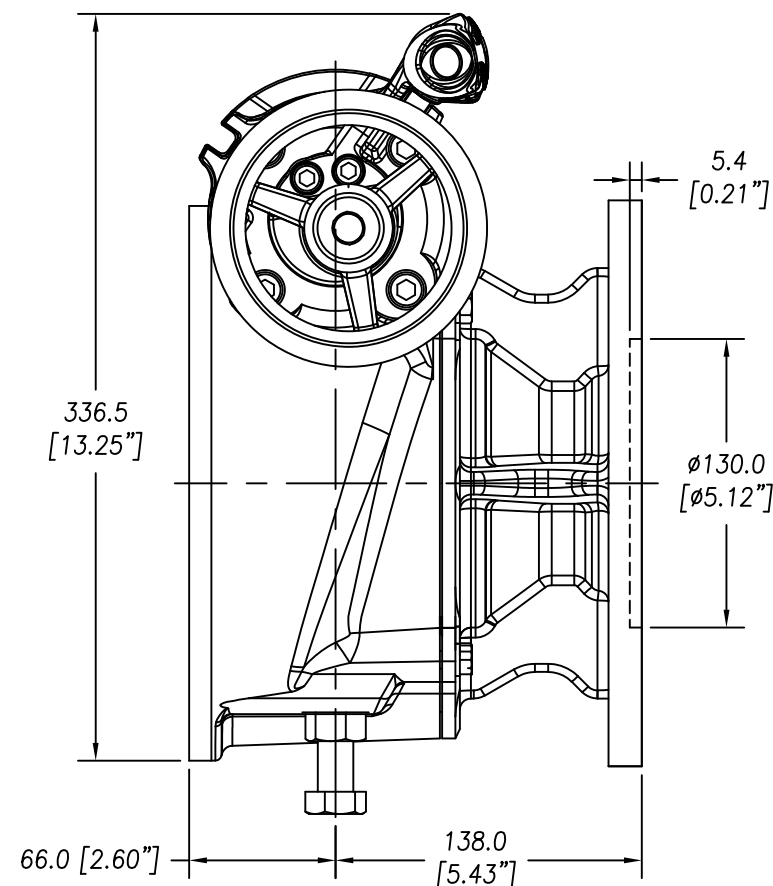


DIAMOND GEAR

43DW247.2

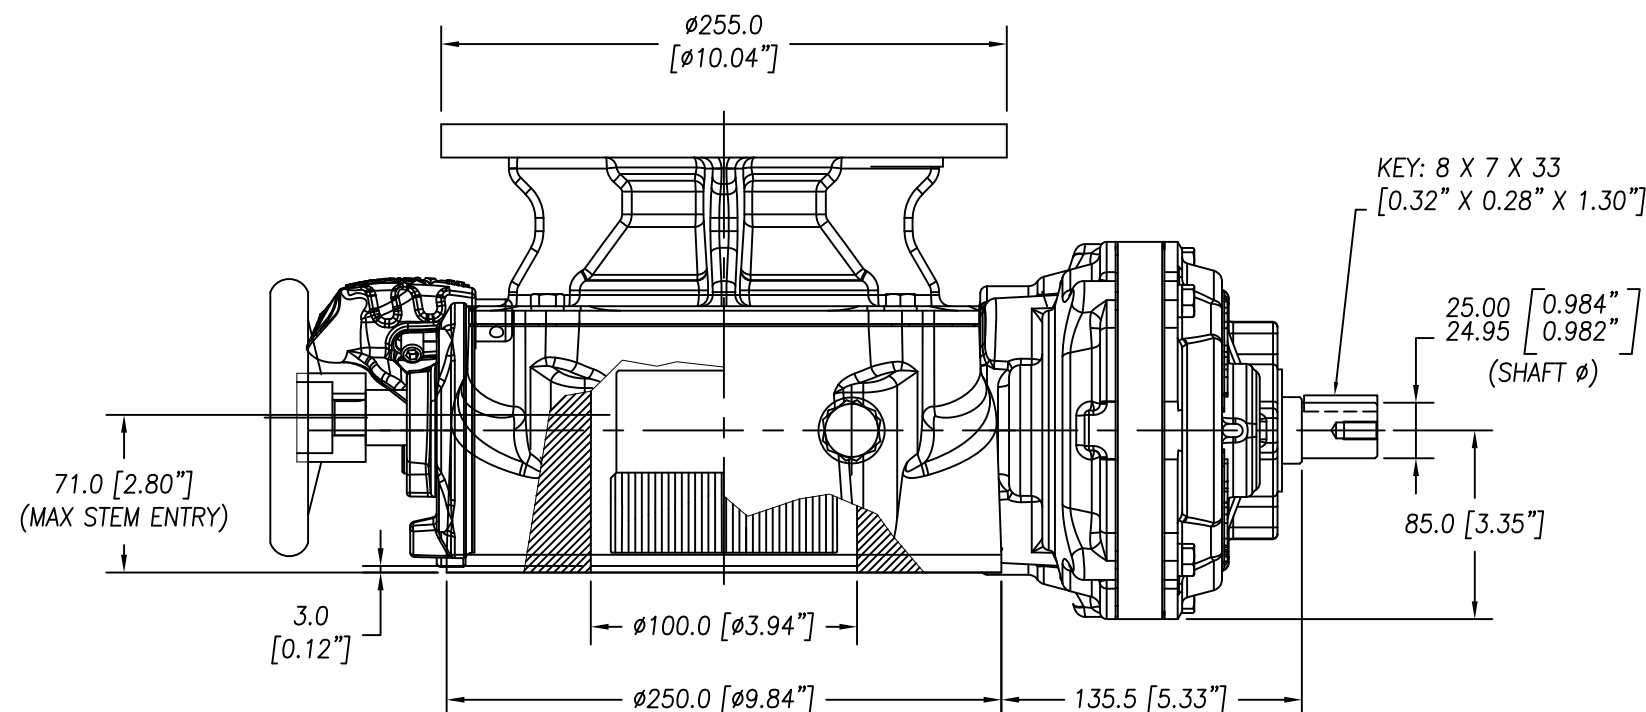

Standard Mounting Flange For Valve	MSS FA16 & FA19
---	----------------------------

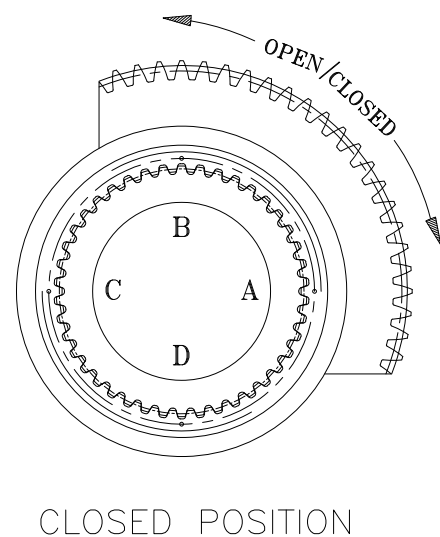

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
22"	58

REV.0

C921276A

9/16/19

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
42,980	640.5	247.2:1	67.1	±20°	61.8	112	$\phi 2-7/8"$ Key: $3/4" \times 1/2"$	2-3/8"	F16 & F19	FA16 & FA19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

