
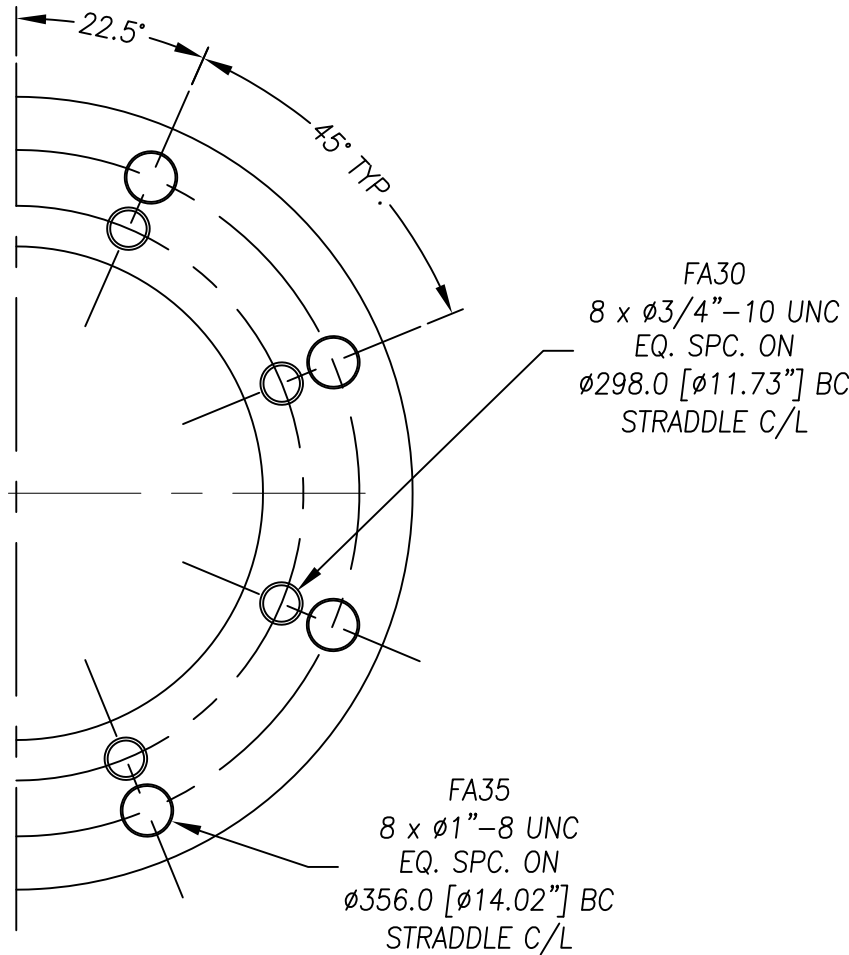
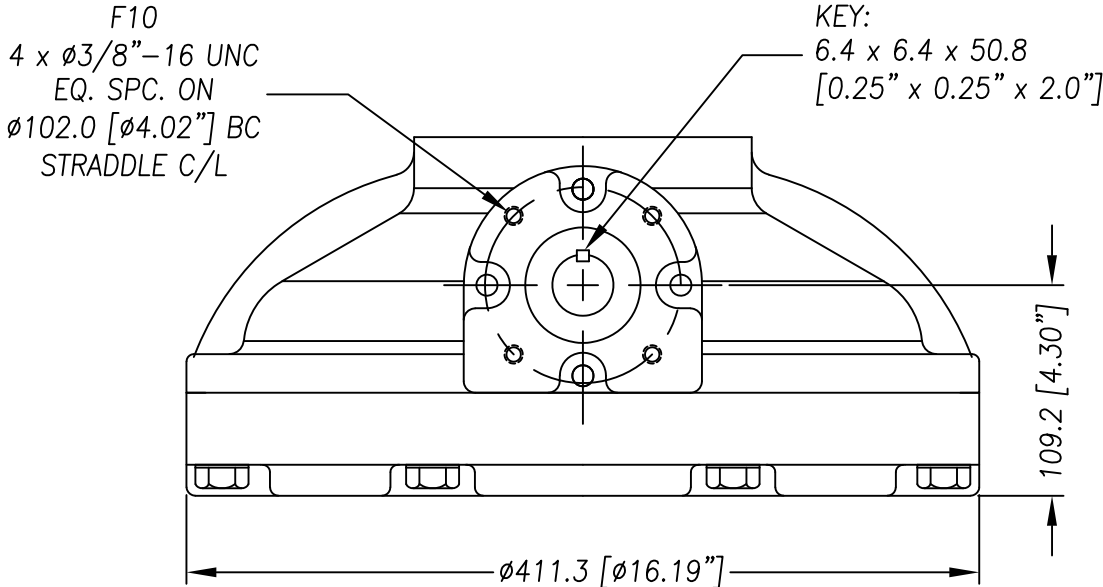
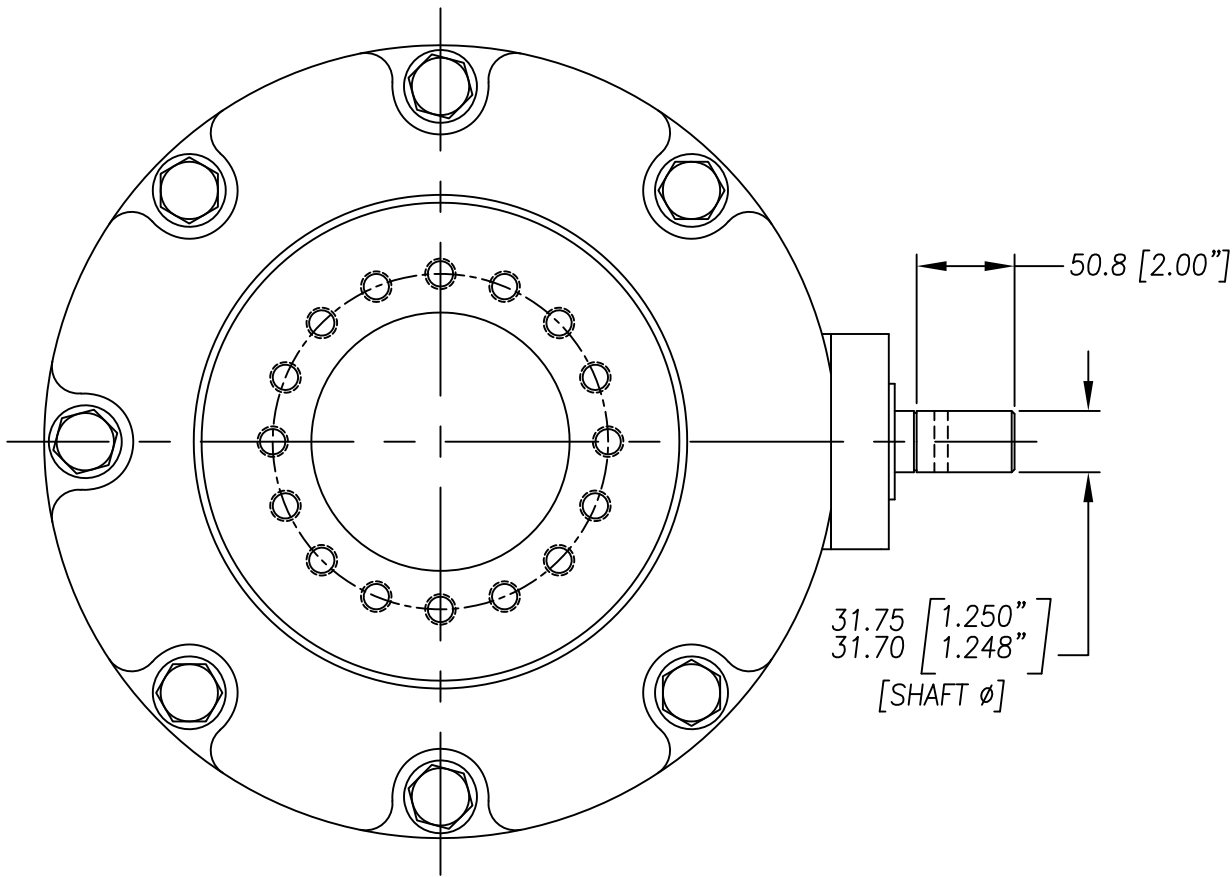


DIAMOND GEAR

48BG6.5

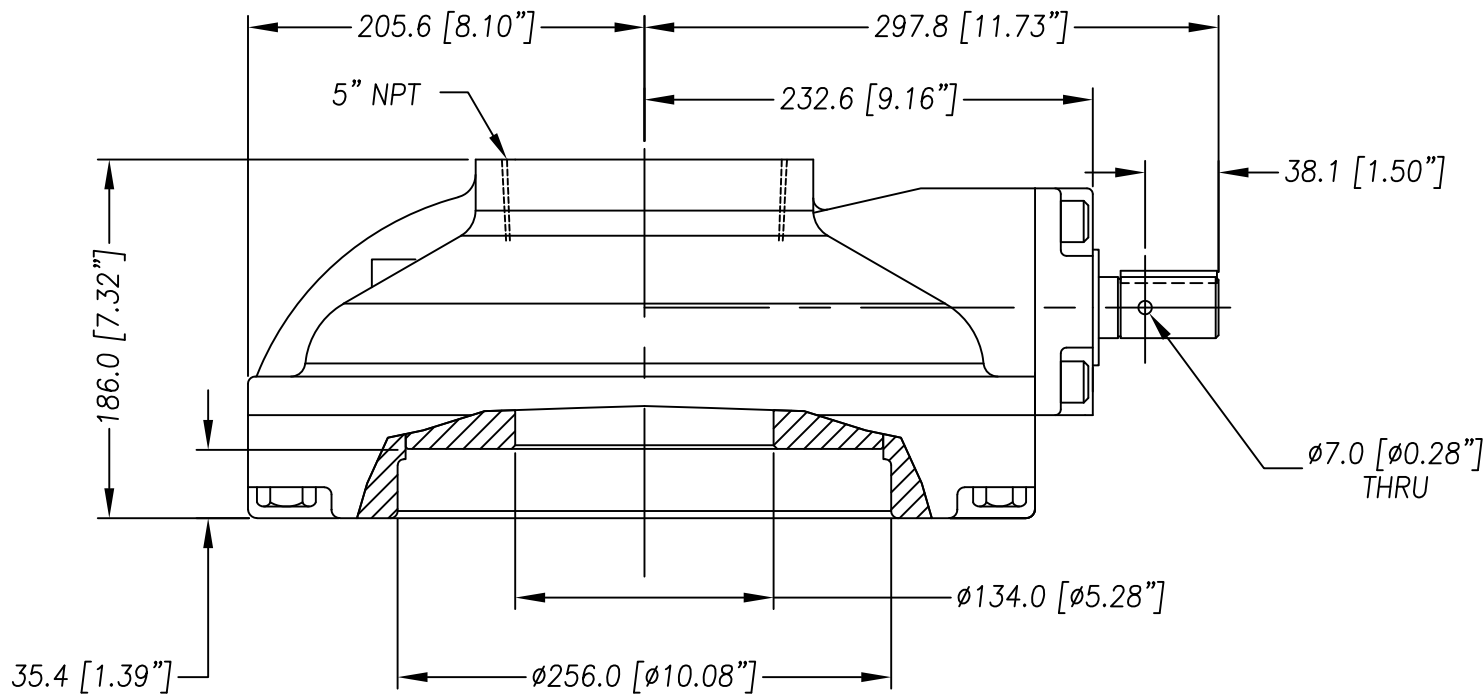

Standard Mounting Flange For Valve	MSS FA30 (STD) MSS FA35 (OPT)
---------------------------------------	----------------------------------

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [FT.LB]	MAX. INPUT TORQUE [FT.LB]	RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	DRIVE PATTERN [IN.]	INPUT SHAFT PATTERN	MAX. STEM DIAMETER FOR TORQUE APPLICATION [IN.]	MAX. STEM DIAMETER FOR THRUST APPLICATION [IN.]	MAX. MOUNTING PATTERN ON CENTERLINE [IN.]	MIN. MOUNTING PATTERN ON CENTERLINE [IN.]	STANDARD MOUNTING STRADDLE C/L
4,000	684	6.5:1	5.85	165,000	180	16x5/8"-11UNC ON $\phi 6.850$ " B.C.	F10	$\phi 5.00$	$\phi 4.50$	$\phi 14.50$	$\phi 11.50$	FA30 (STANDARD) FA35 (OPTIONAL)



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



REV.G

C400009A

10/28/19