



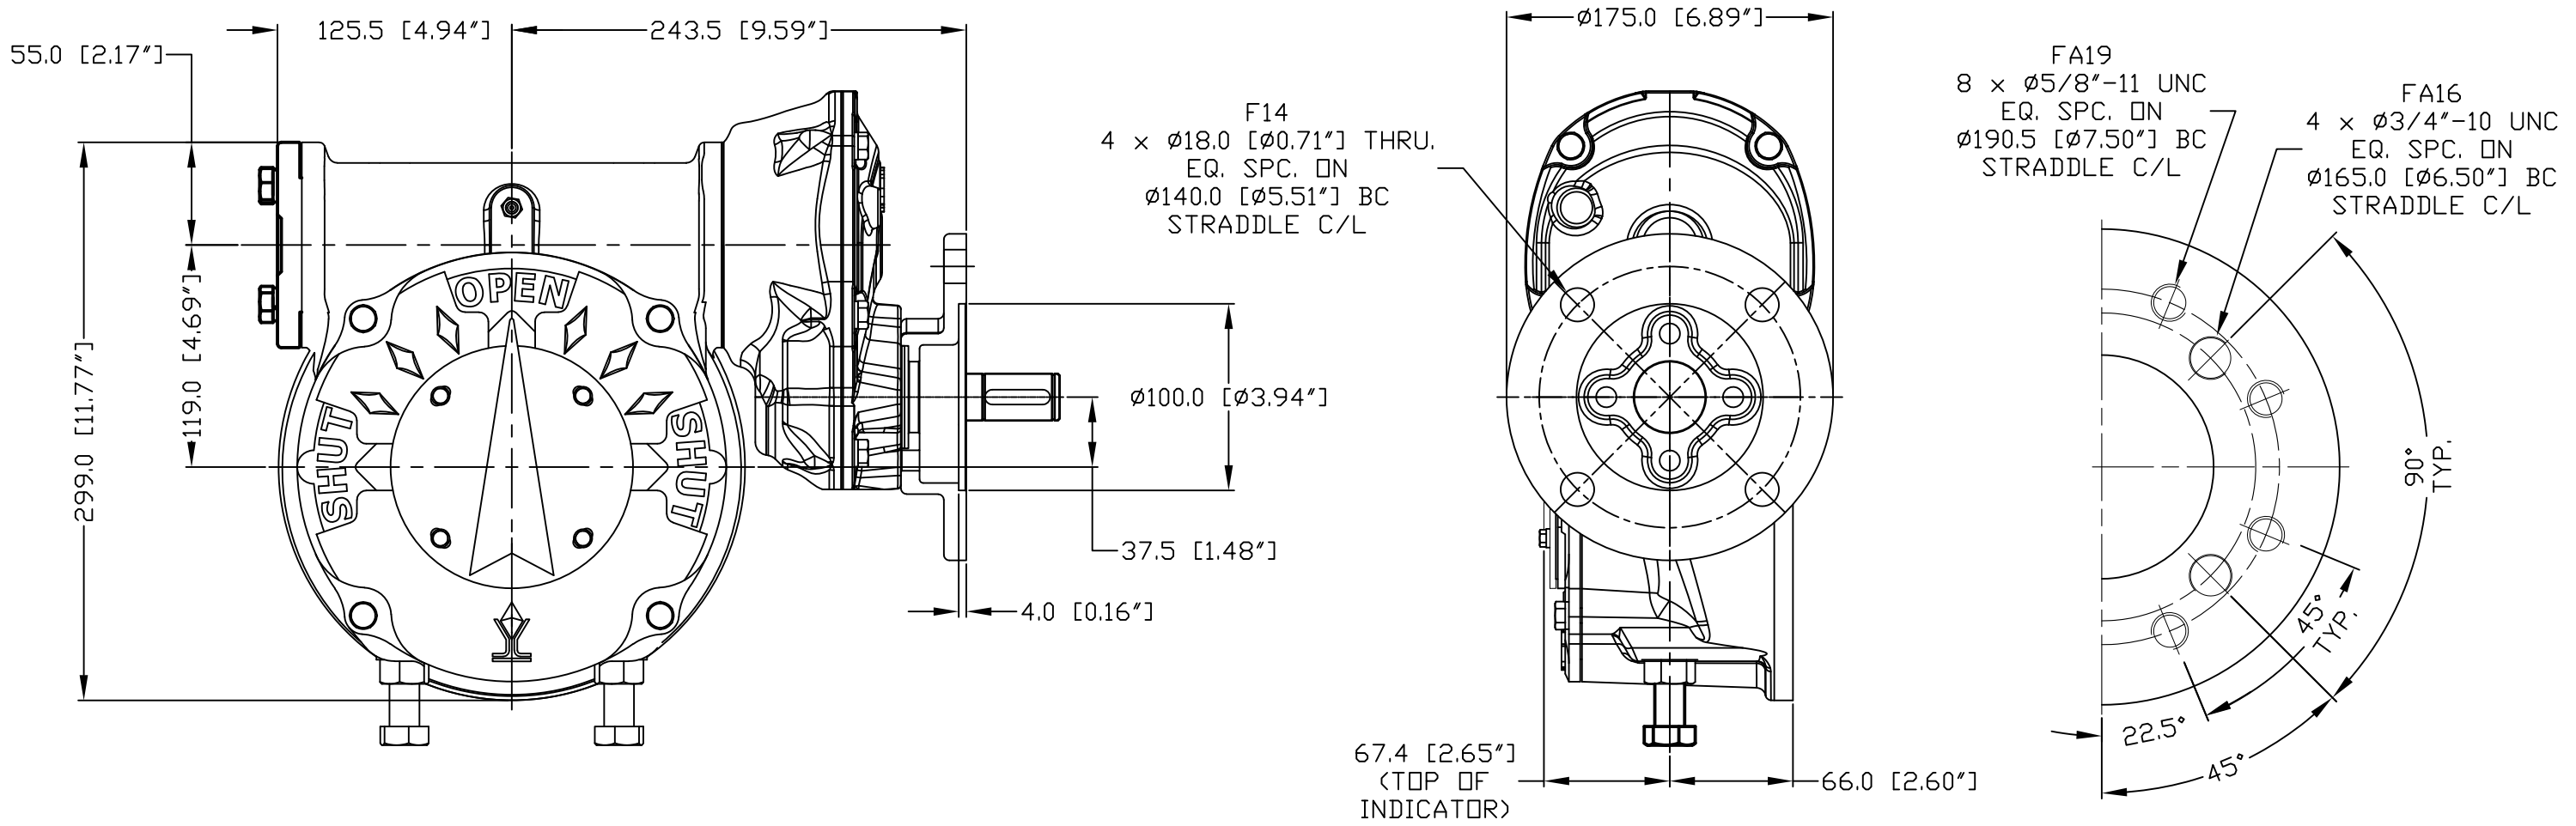

Standard Mounting Flange For Valve	MSS FA16 & FA19
---------------------------------------	--------------------

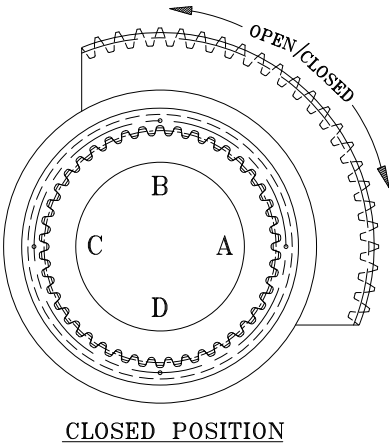

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
22"	123

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
50,184	1,356	120:1	37	±20°	30	84	2-7/8" Key: 3/4"x1/2"	2-3/8"	FA16 & FA19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921211A

12/17/19

REV.A