
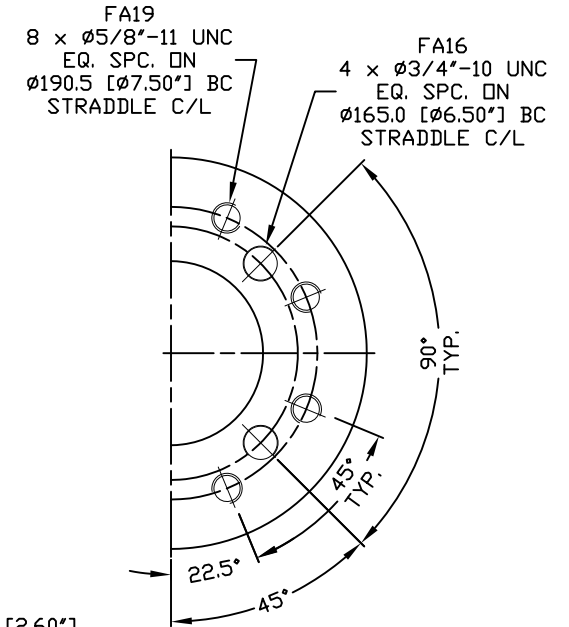




DIAMOND GEAR

50WG300

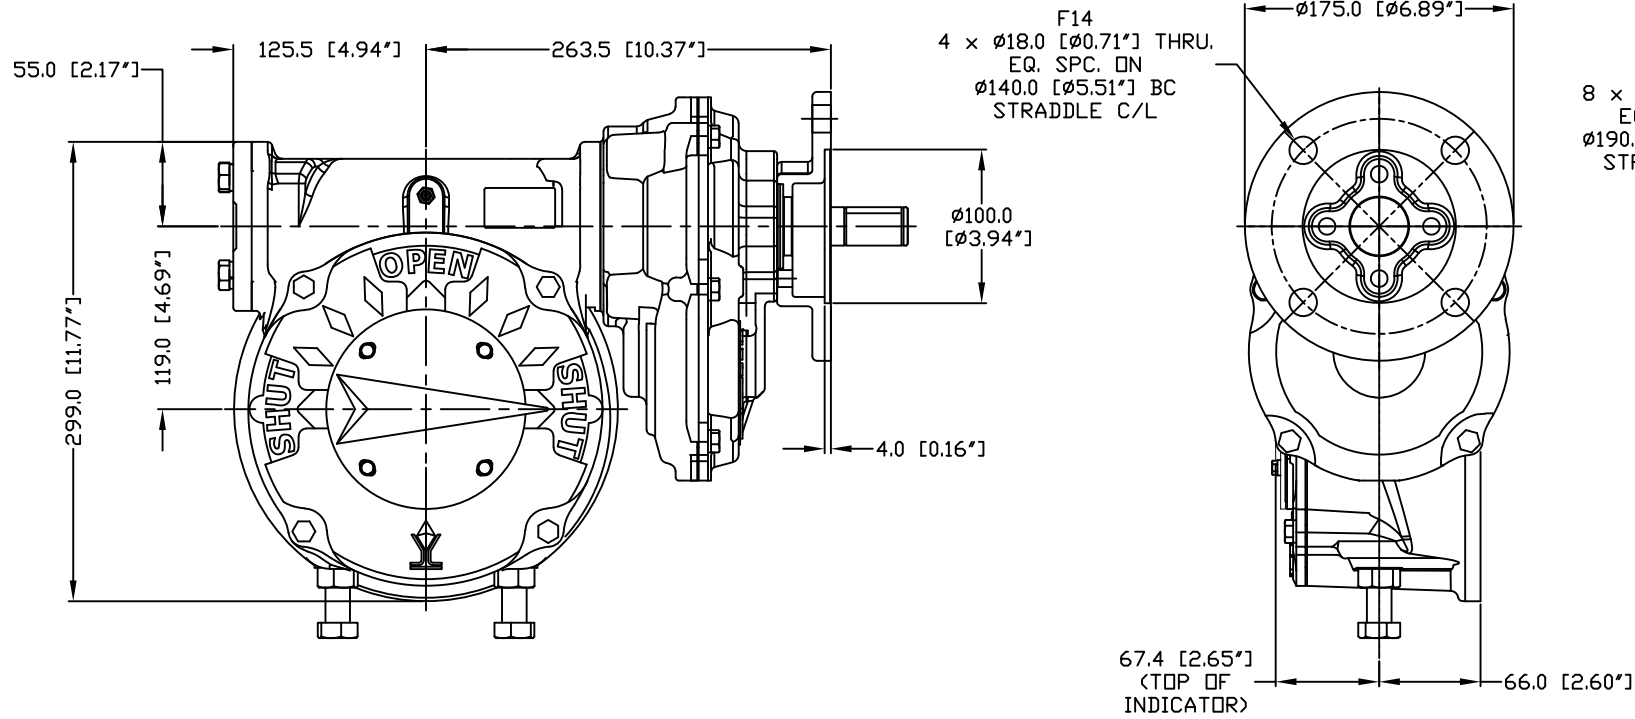

Standard Mounting Flange For Valve

MSS
FA16 & FA19

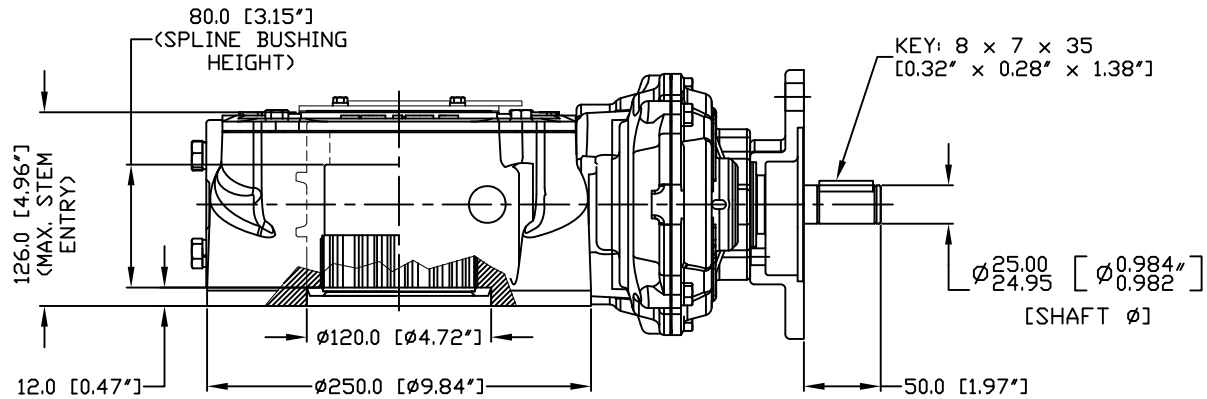

H.W. DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
22"	60

REV.A

C921241A

12/17/19

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
50,184	617	300:1	81.3	±20°	75	97	Ø2-7/8" Key: 3/4" x 1/2"	2-3/8"	FA16 & FA19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

