
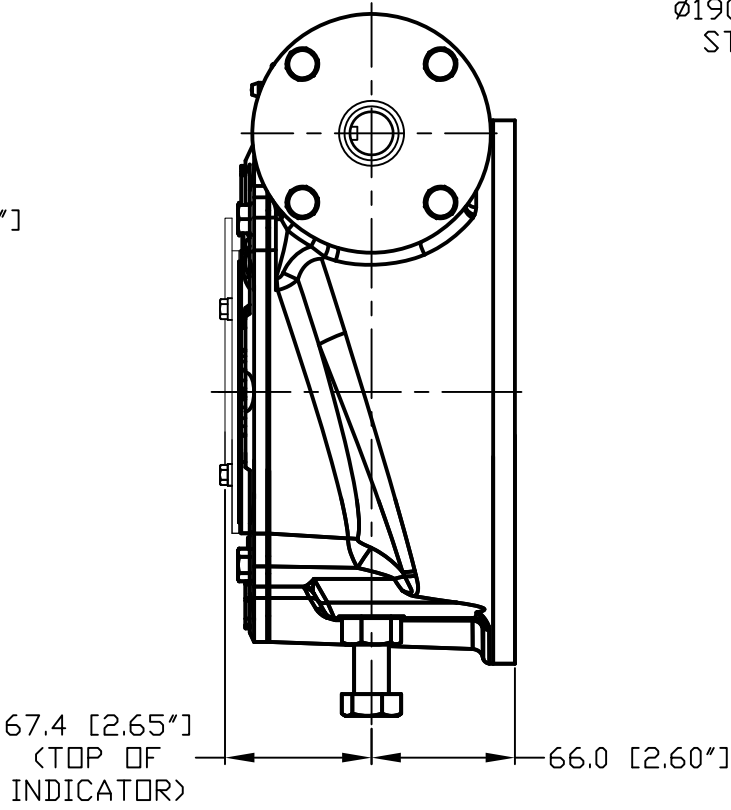



DIAMOND GEAR

50WG48


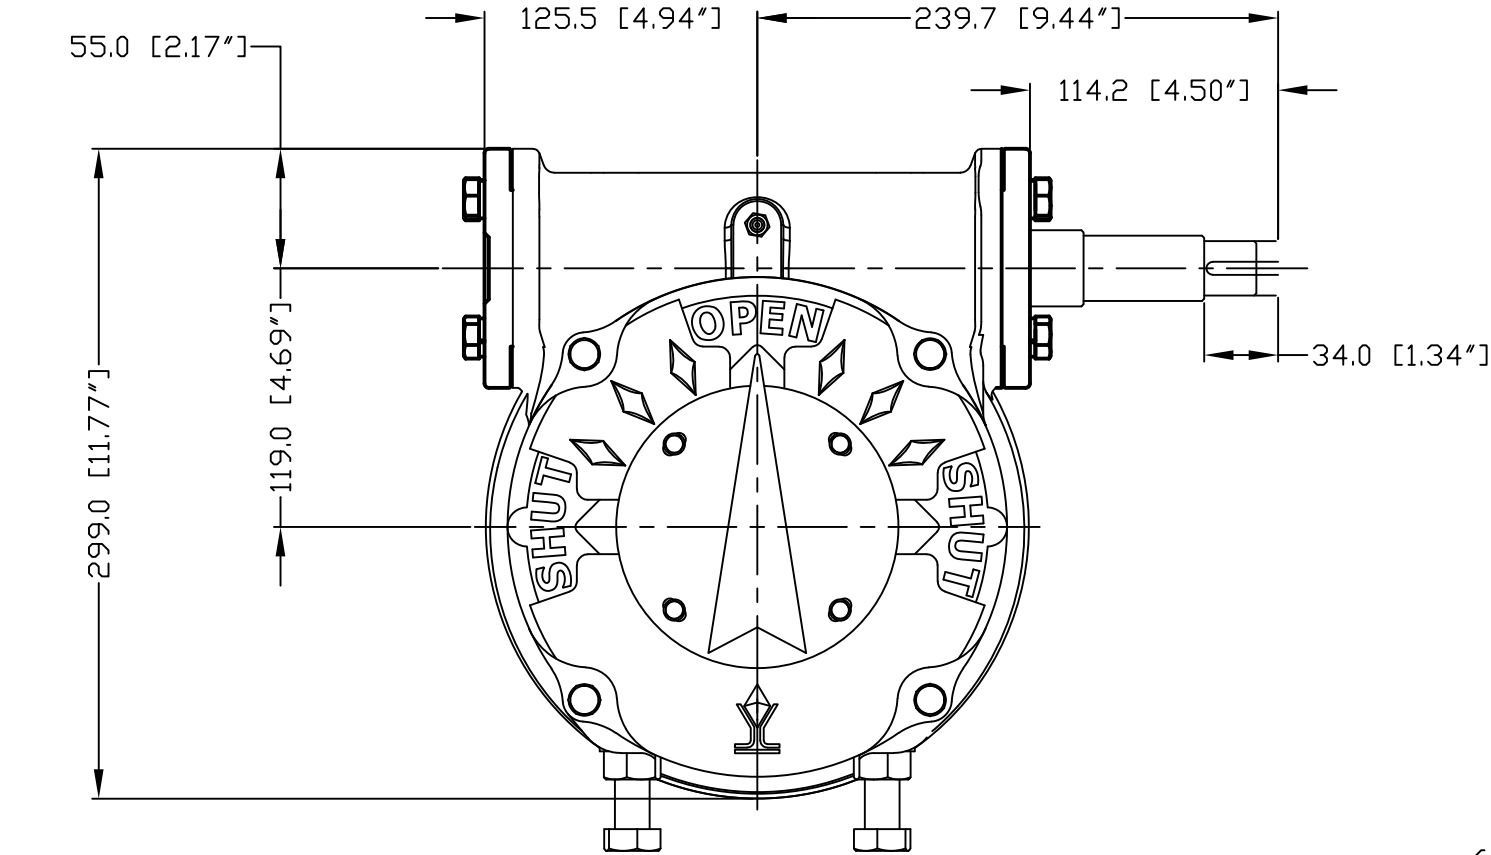


FA19
8 x Ø5/8"-11 UNC
EQ. SPC. DN
Ø190.5 [Ø7.50"] BC
STRADDLE C/L

FA16
4 x Ø3/4"-10 UNC
EQ. SPC. DN
Ø165.0 [Ø6.50"] BC
STRADDLE C/L

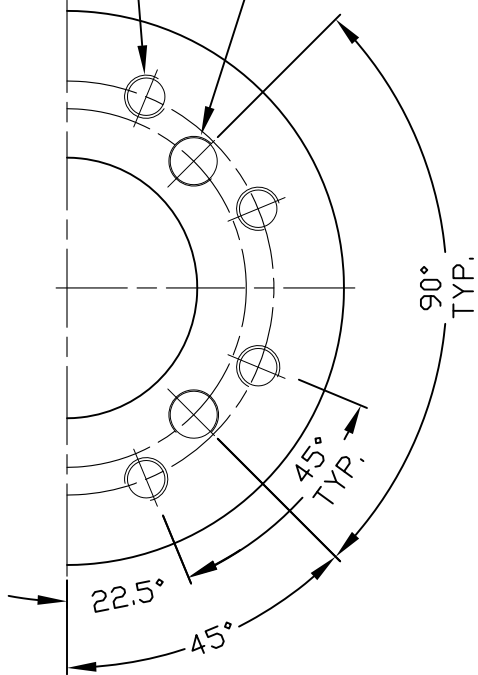

Standard Mounting Flange For Valve	MSS FA16 & FA19
---------------------------------------	--------------------

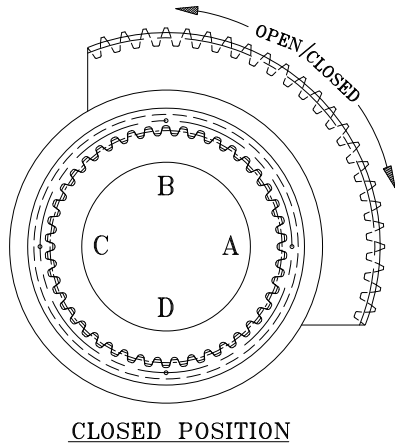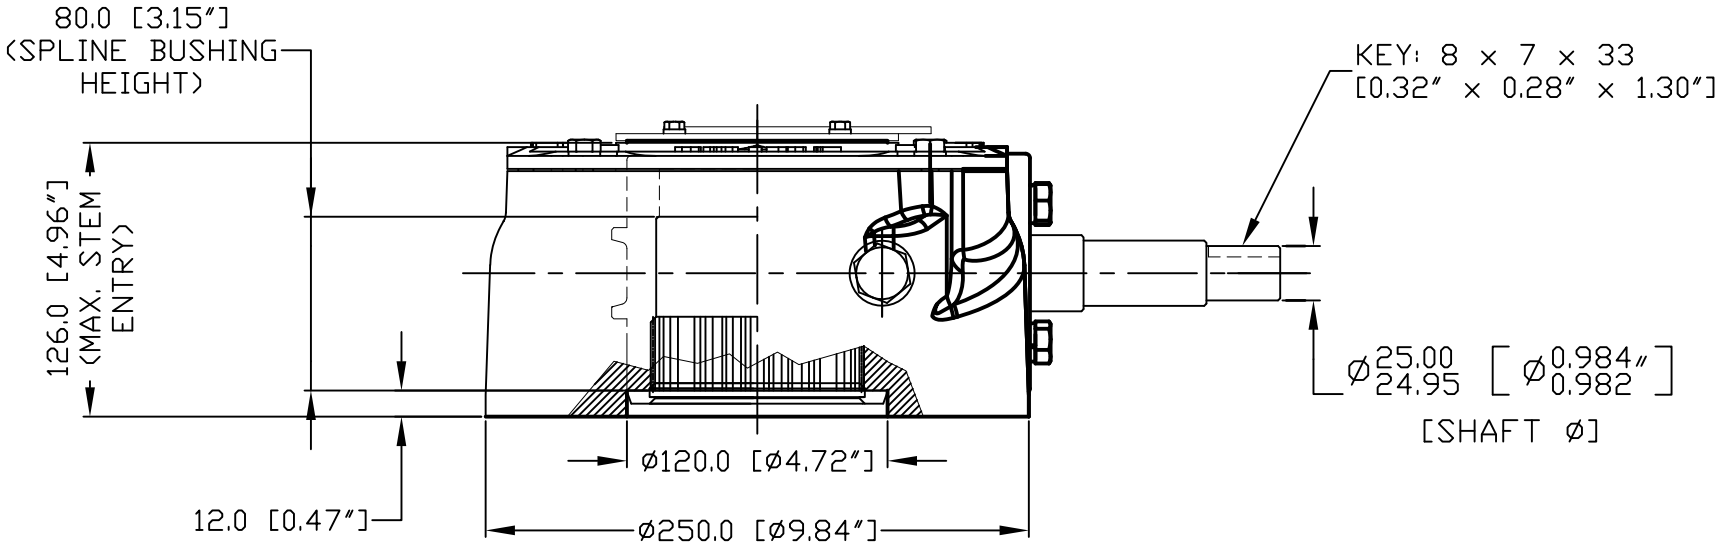

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
22"	271

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
50,184	2,987	48:1	16.8	±20°	12	66	Ø2-7/8" Key: 3/4" x 1/2"	2-3/8"	FA16 & FA19



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921213A	12/17/19
REV.A	