
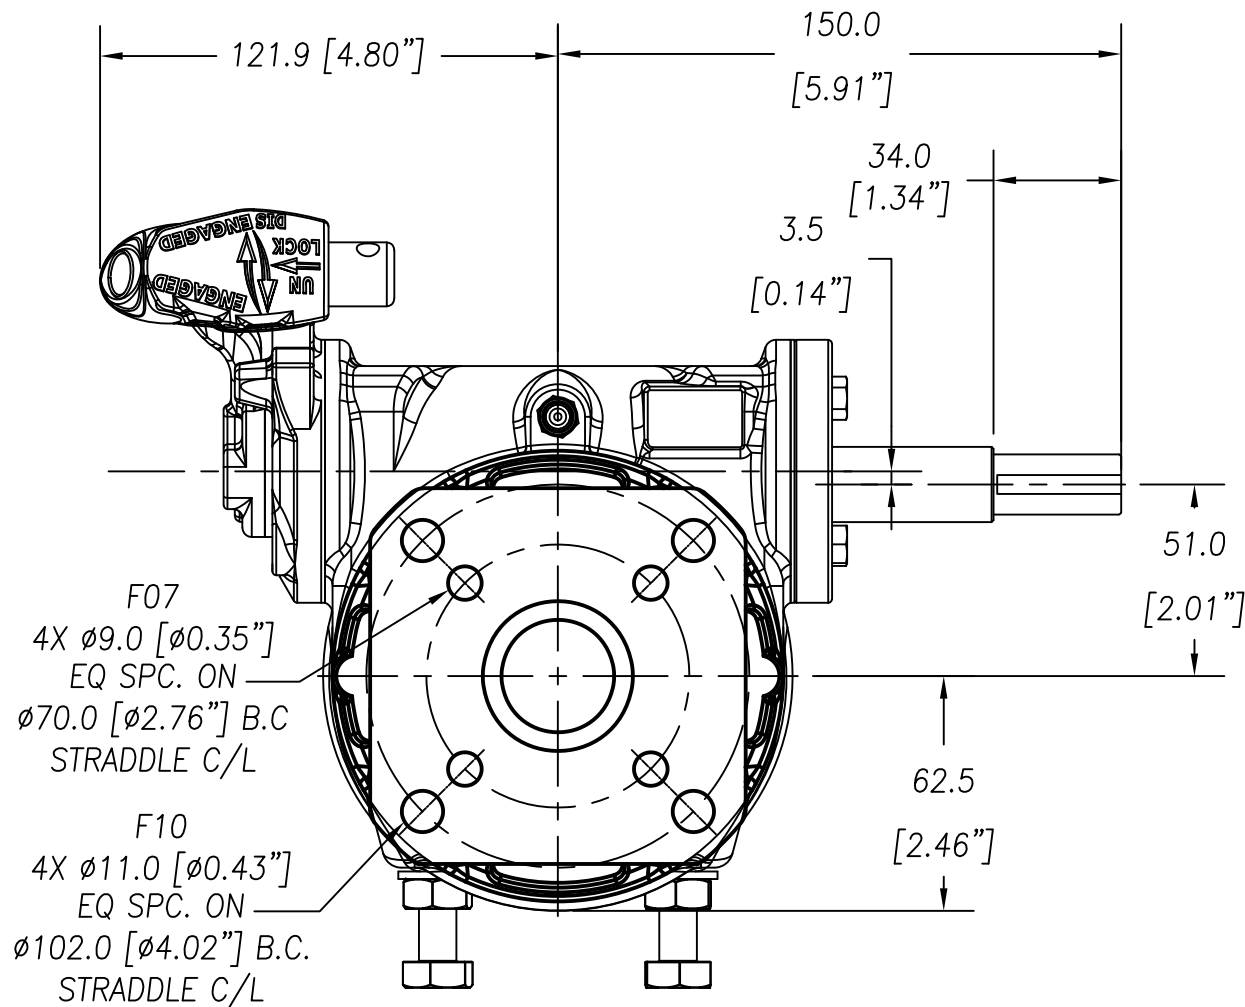


DIAMOND GEAR



5DW32

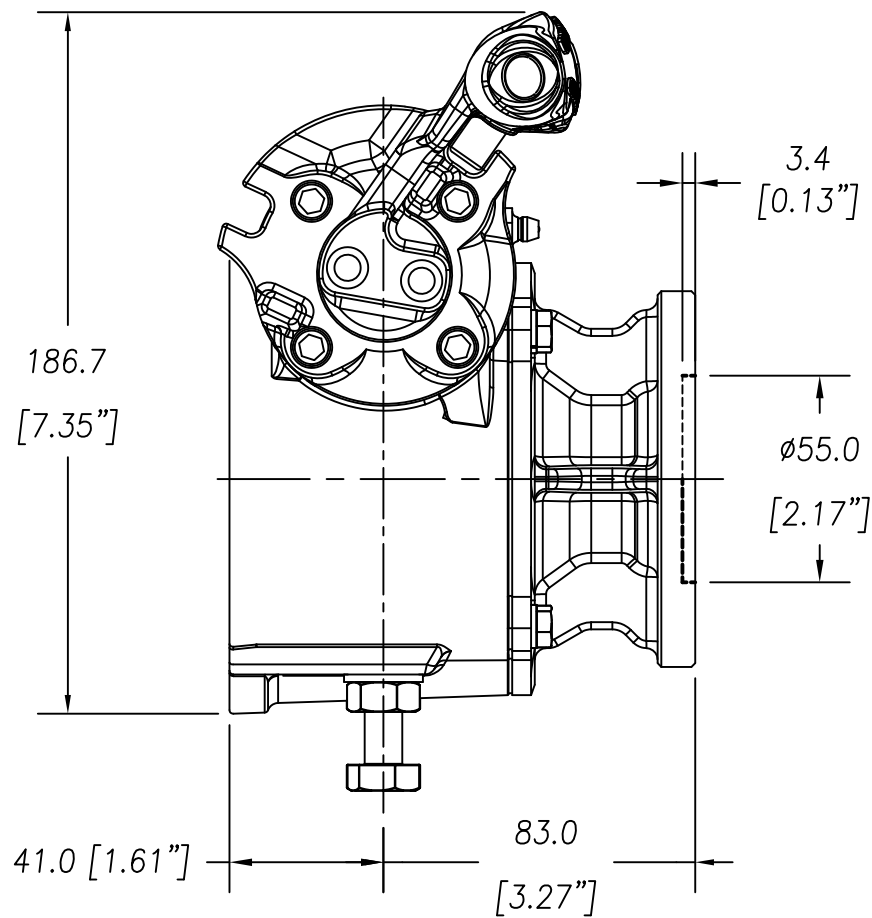

FA07
4X 5/16"-18 UNC
EQ SPC. ON
70.0 [2.76] B.C.
STRADDLE C/L

FA10
4X 3/8"-16 UNC
EQ SPC. ON
102.0 [4.02] B.C.
STRADDLE C/L

Standard Mounting Flange For Valve	MSS FA07 & FA10
---------------------------------------	-----------------

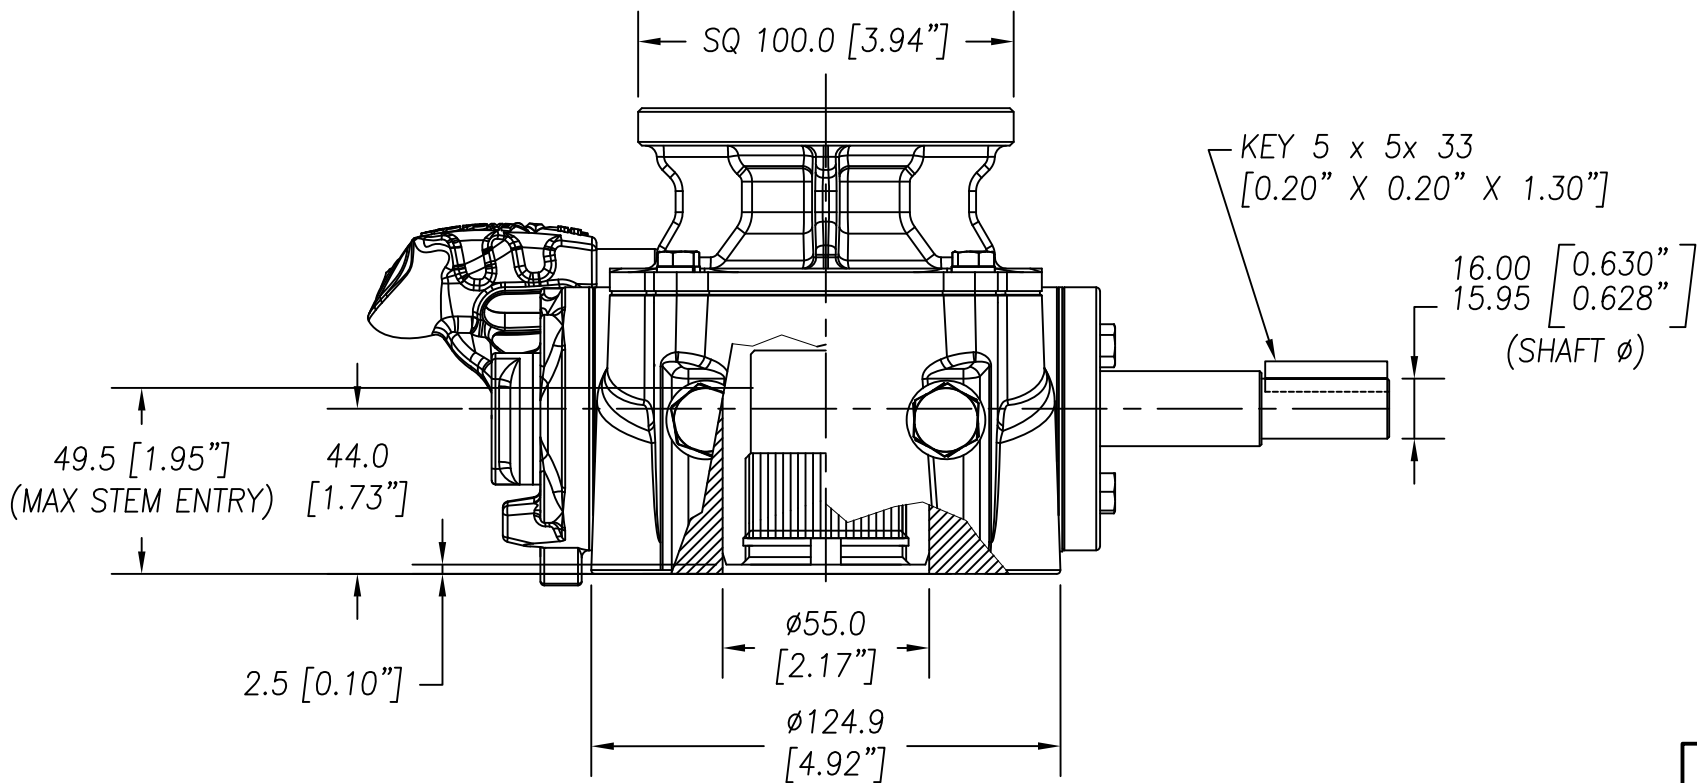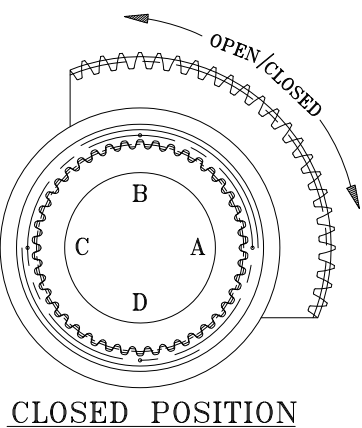

HW DIA	RIM PULL AT MAX. I/P TORQUE (Lbs.)
10"	90

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
4,936	441	32:1	11.2	±20°	8	22	1-1/8" Key: 1/4" x 1/4"	13/16"	F07 & F10	FA07 & FA10



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



REV.A

C921223A

9/24/19