

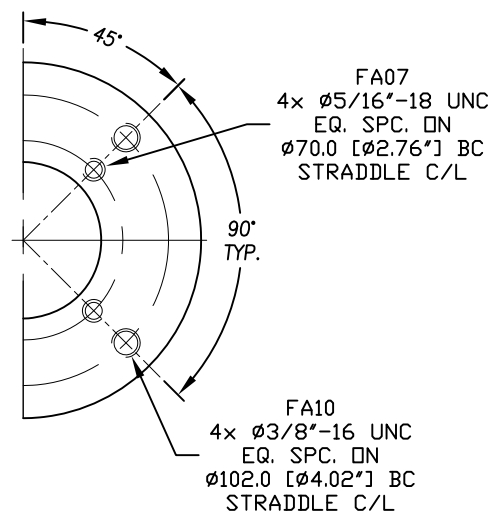
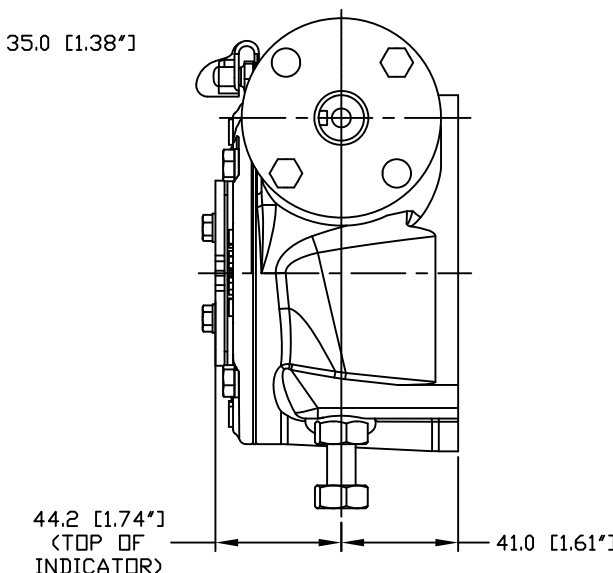
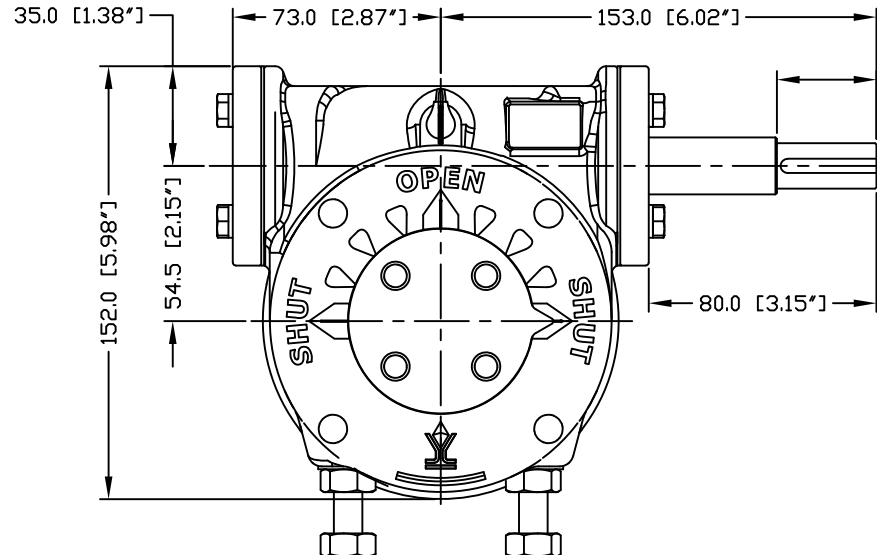


DIAMOND GEAR

6WG34



Standard Mounting Flange For Valve	MSS FA07 & FA10
---------------------------------------	--------------------

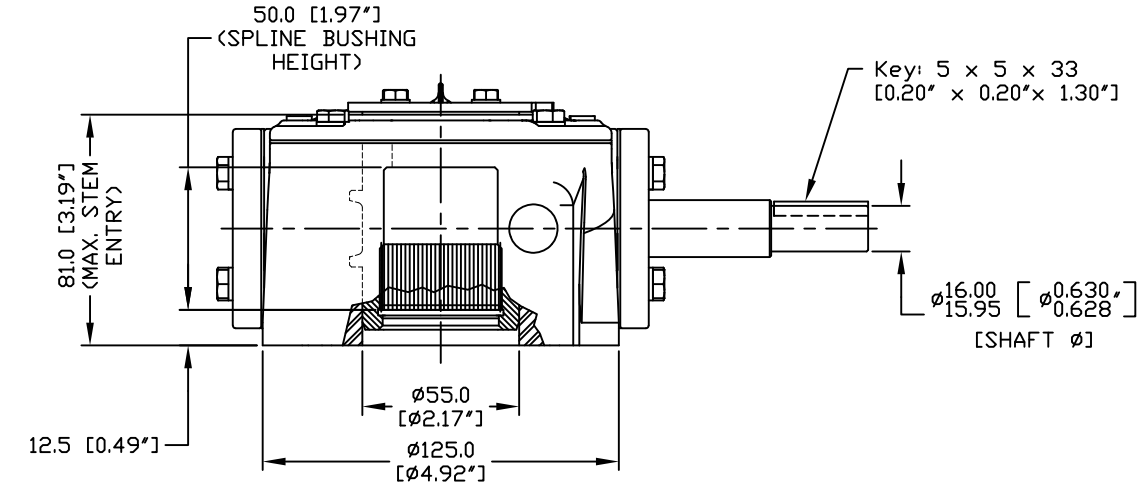

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
10"	101

REV.A

C921227A

12/17/19

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
5,914	497	34:1	11.9	±10°	8.5	14	$\phi 1-1/8"$ Key: $1/4" \times 1/4"$	15/16"	FA07 & FA10



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

