
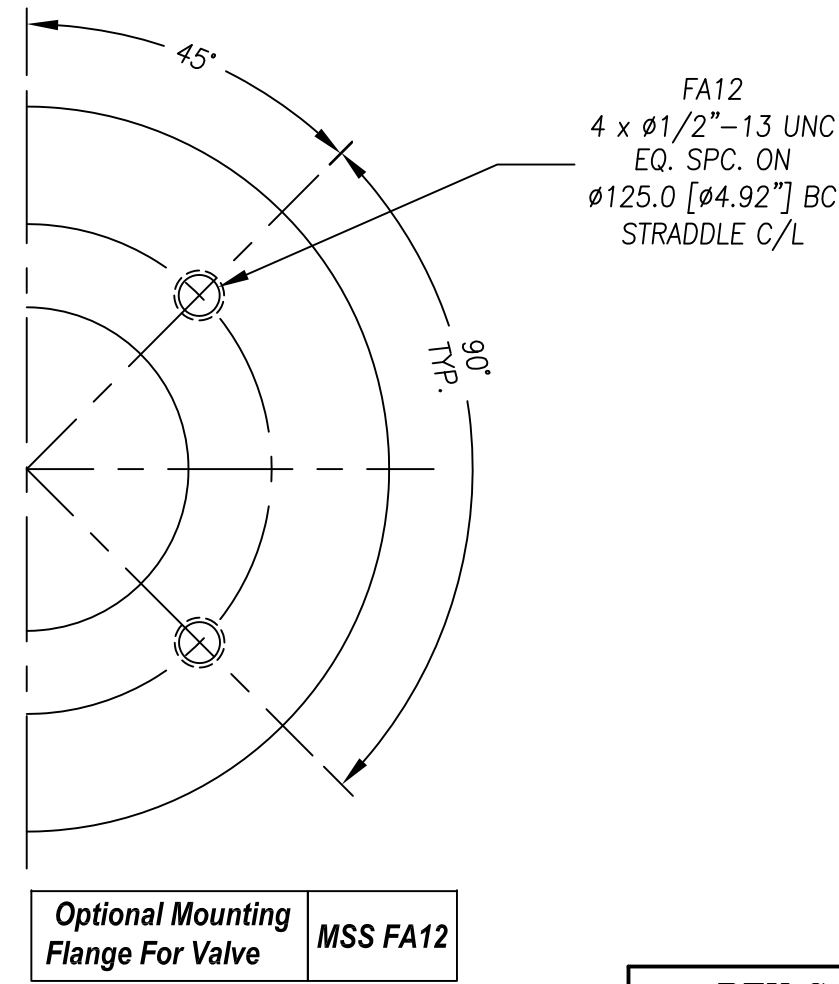
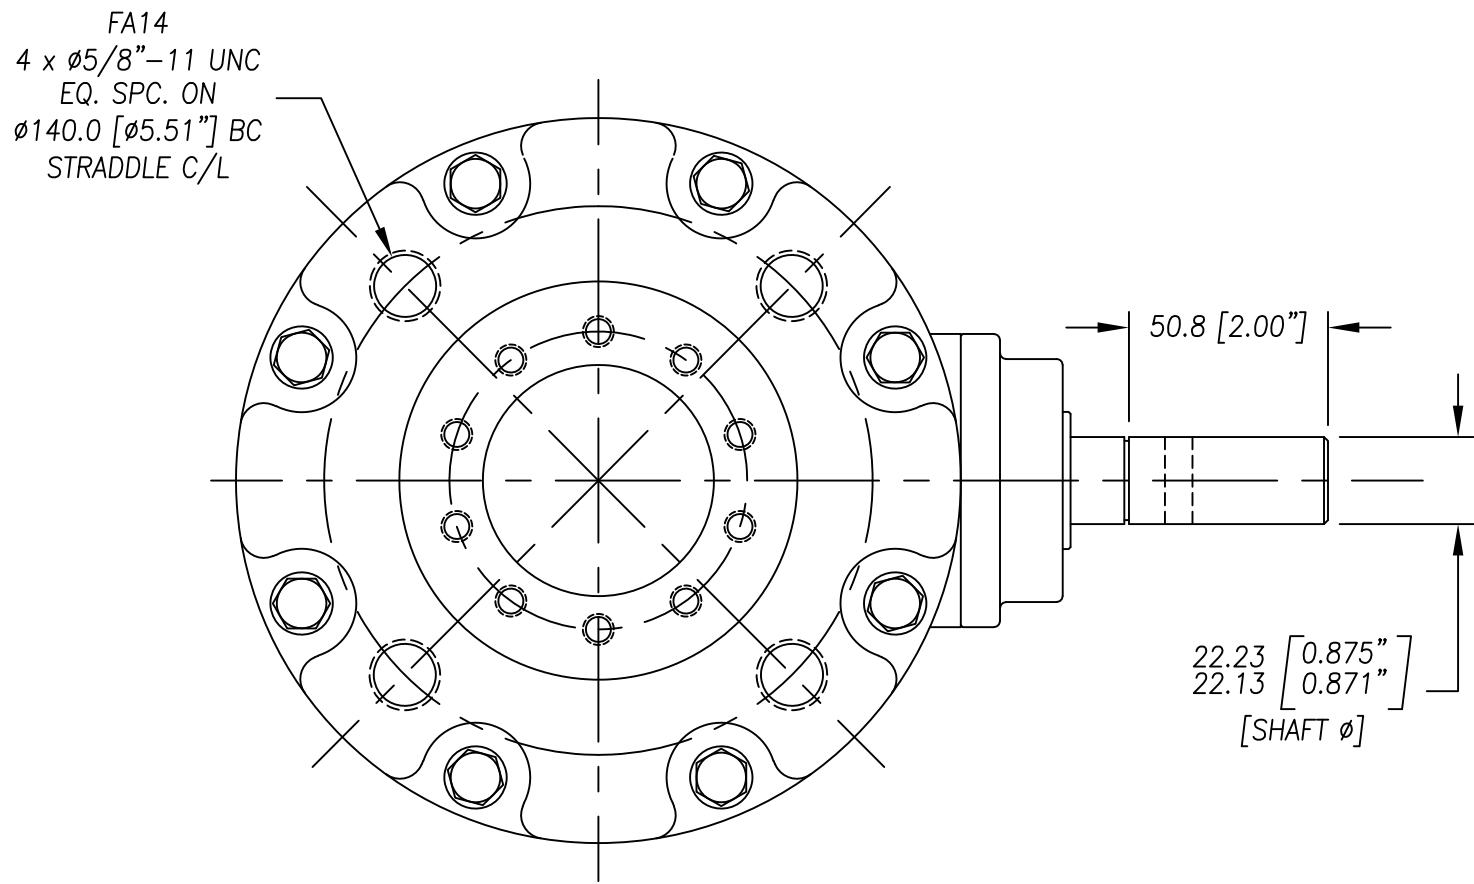
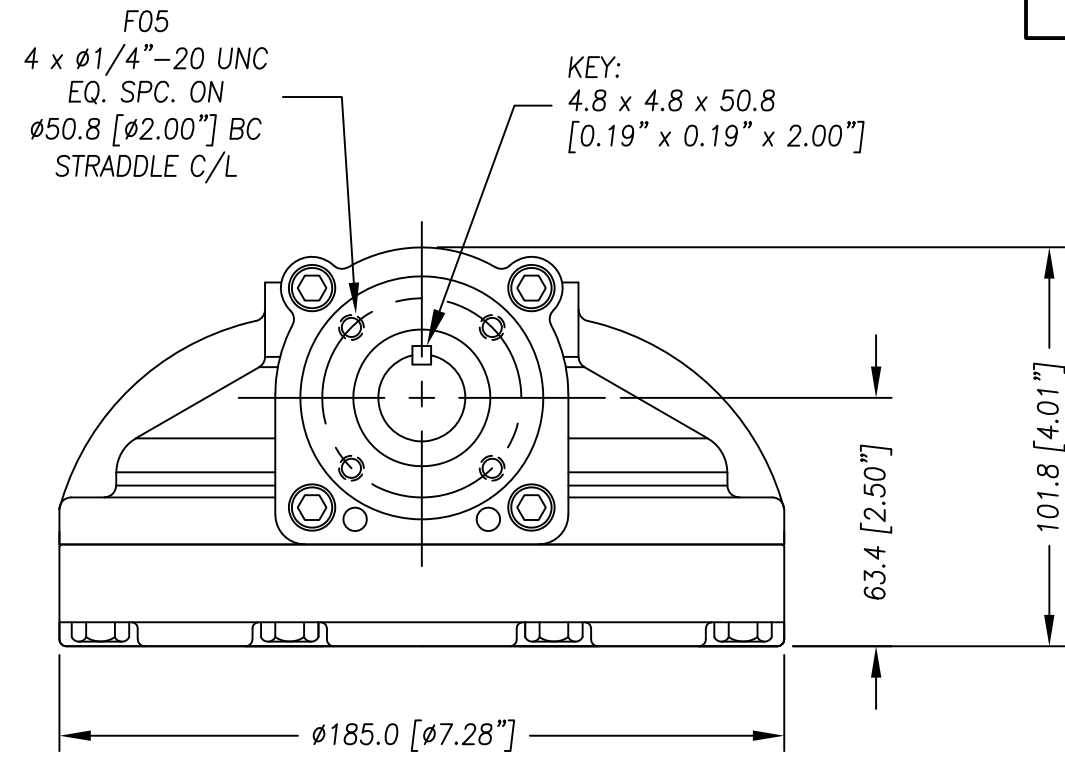


DIAMOND GEAR

7.2BG3

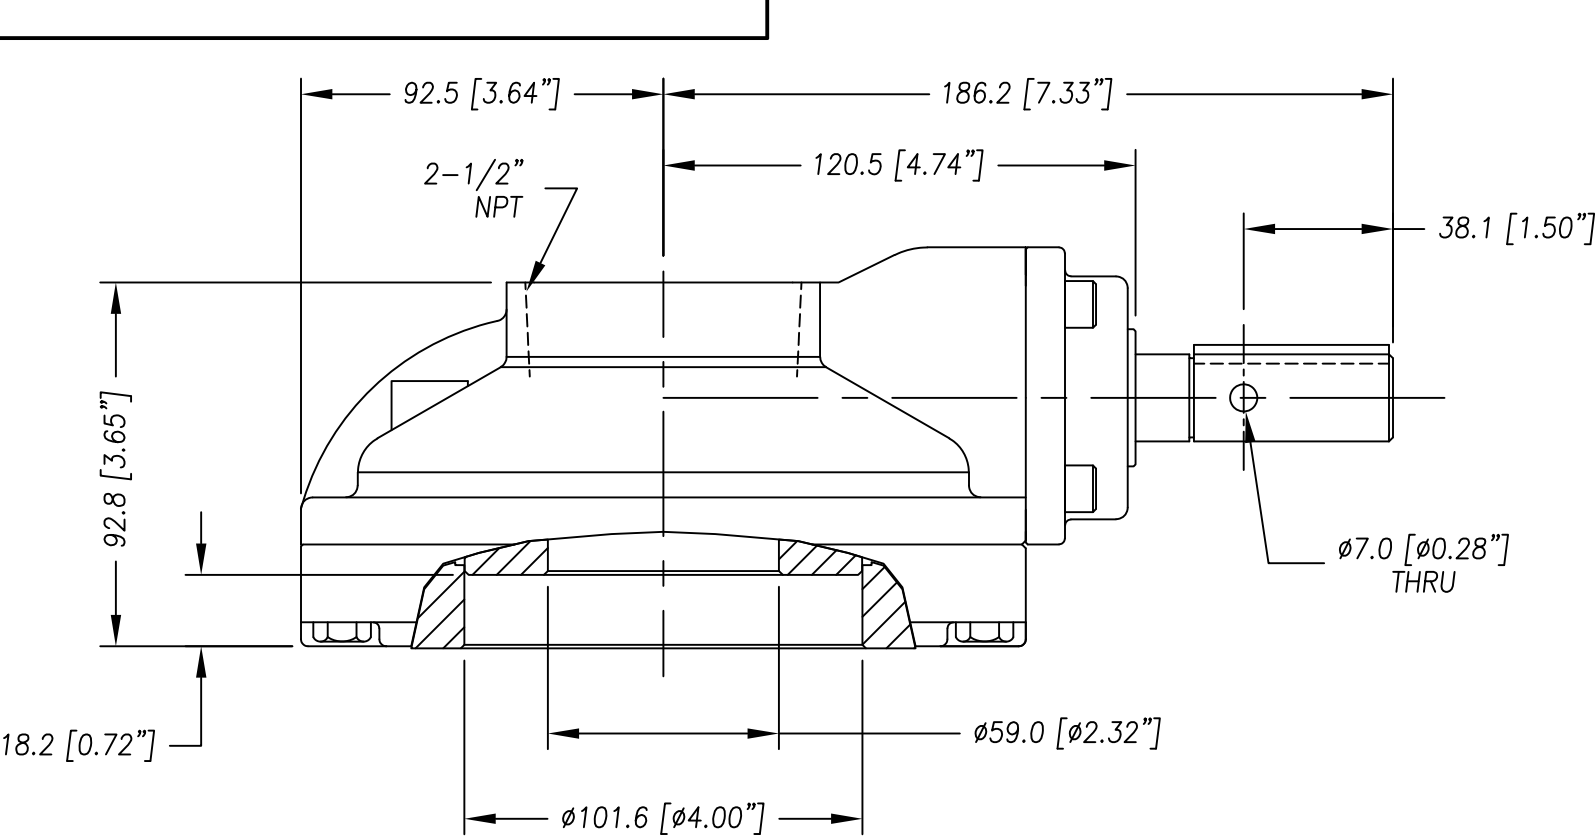

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [FT.LB]	MAX. INPUT TORQUE [FT.LB]	RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	DRIVE PATTERN [IN.]	INPUT SHAFT PATTERN	MAX. STEM DIAMETER FOR TORQUE APPLICATION [IN.]	MAX. STEM DIAMETER FOR THRUST APPLICATION [IN.]	MAX. MOUNTING PATTERN ON CENTERLINE [IN.]	MIN. MOUNTING PATTERN ON CENTERLINE [IN.]	STANDARD MOUNTING STRADDLE C/L
600	222	3:1	2.7	30,000	18	10x5/16"-18UNC ON Ø2.99" B.C.	F05	Ø2.25	Ø2.00	Ø6.50	Ø4.93	FA12 (OPTIONAL) FA14 (STANDARD)

REV.G

C400001A

10/28/19



DIAMOND GEAR

HOUSTON, TEXAS, USA

PHONE: 713-590-0270

