

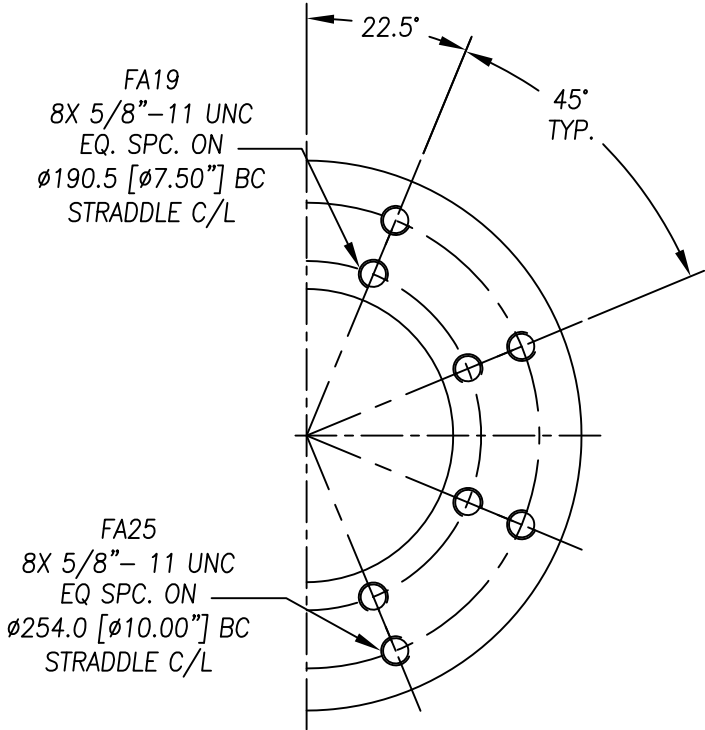
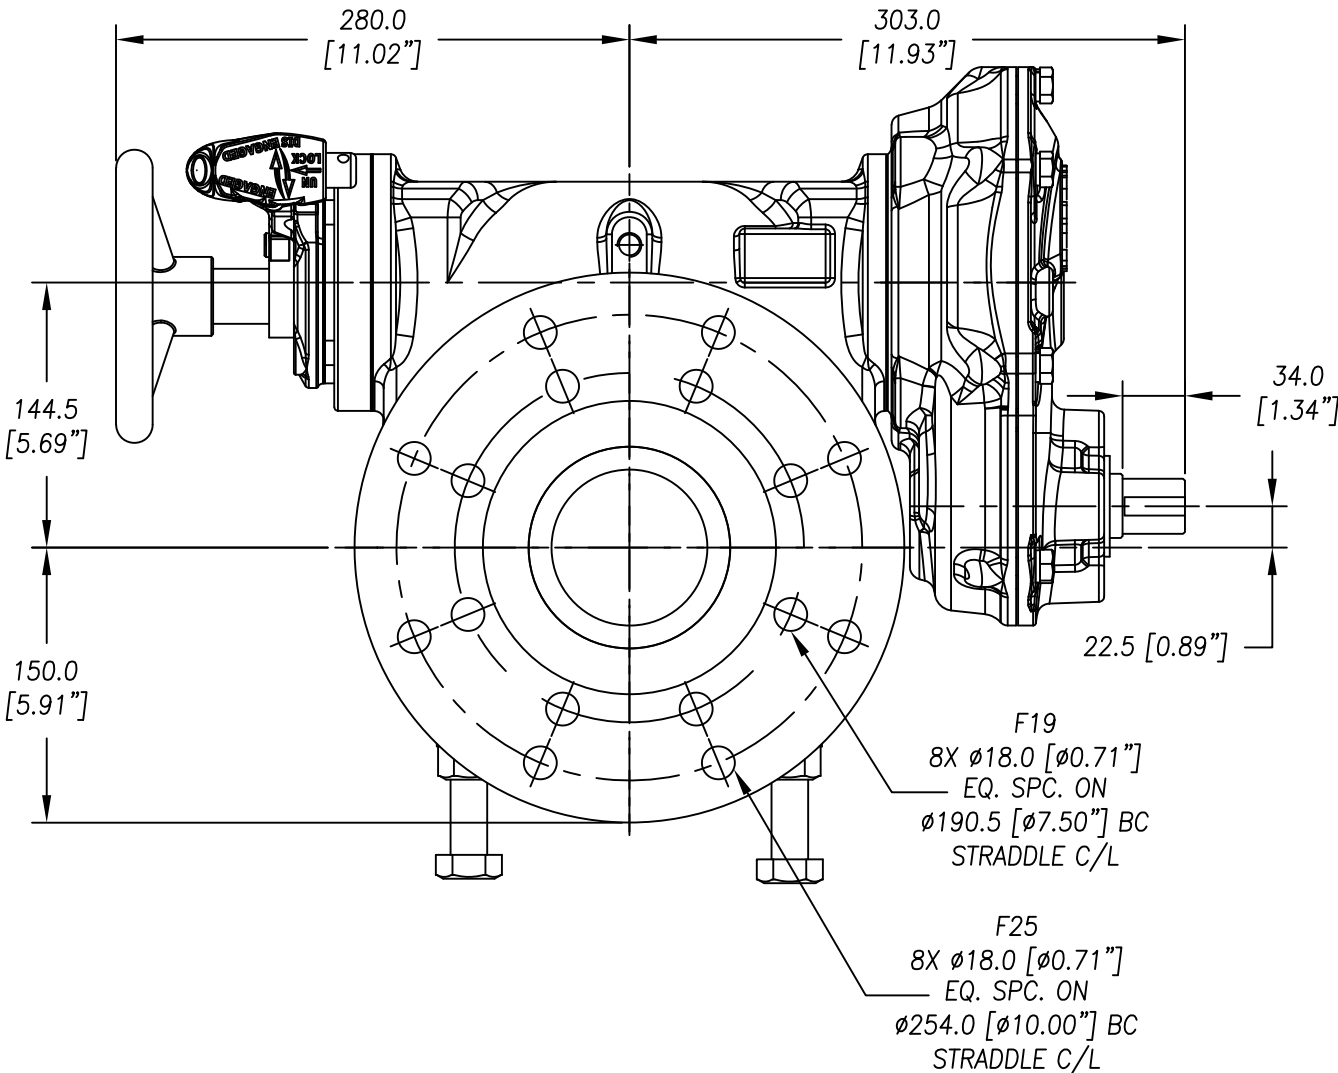
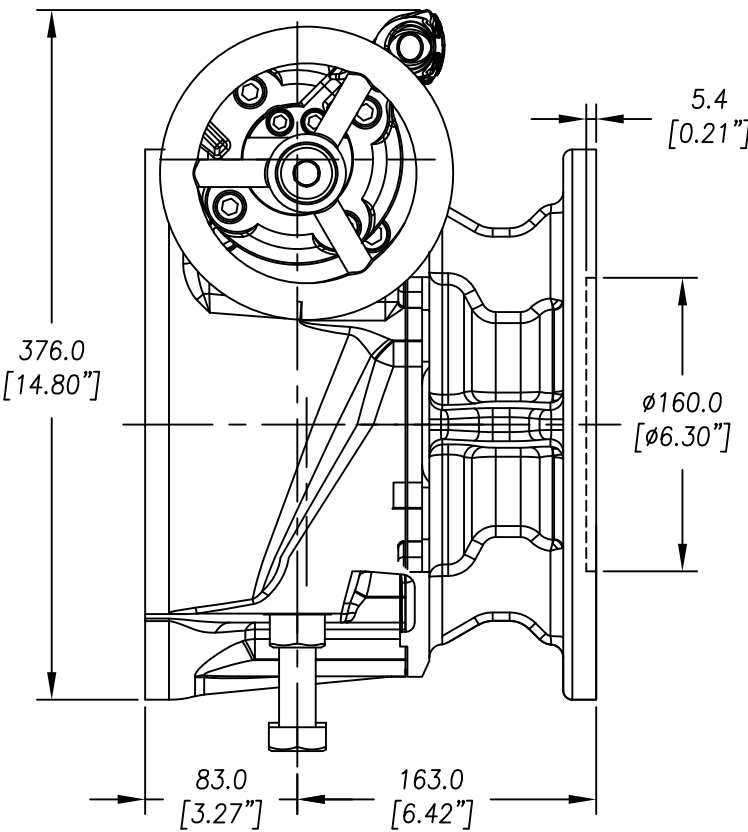


DIAMOND GEAR

71DW147

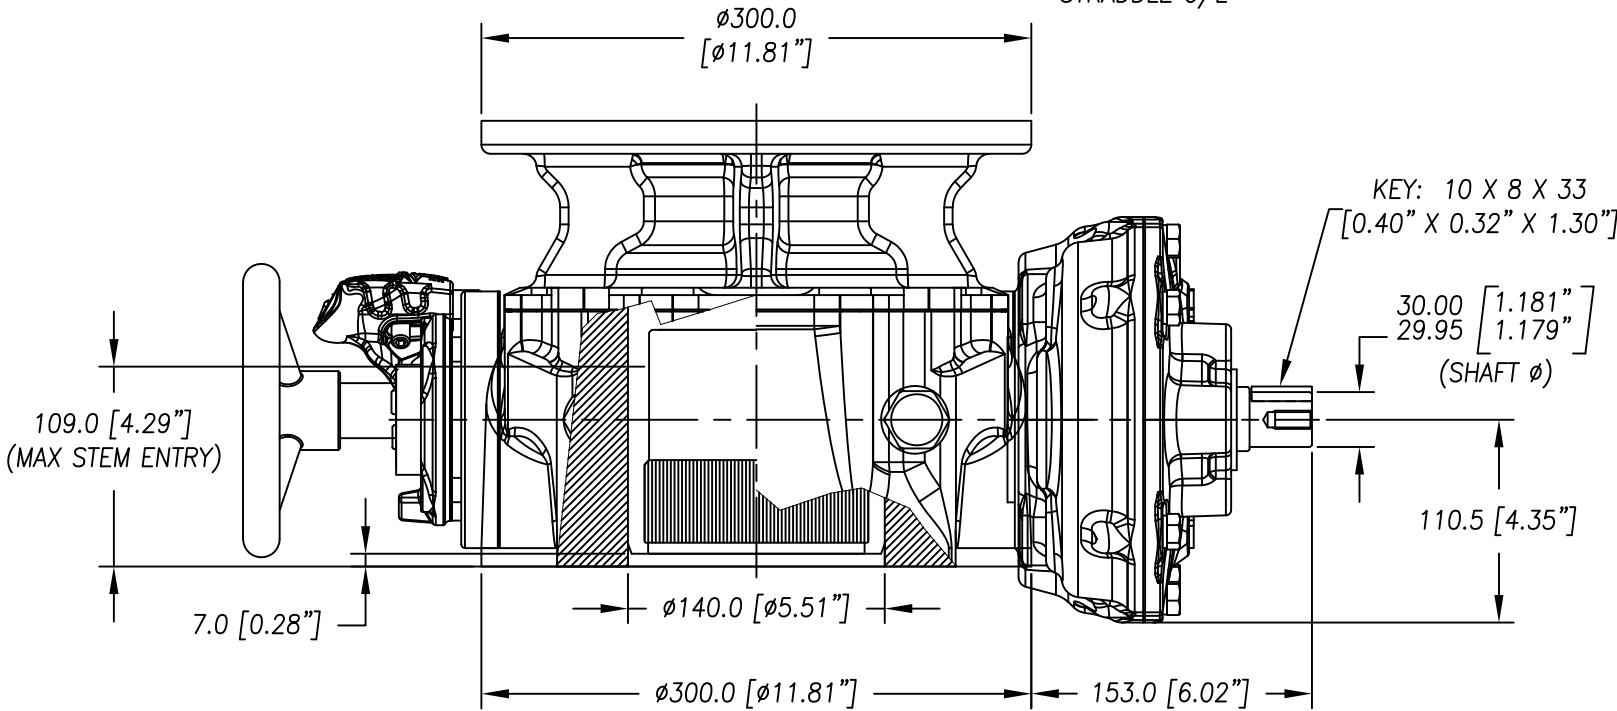

Standard Mounting Flange For Valve MSS FA19 & FA25

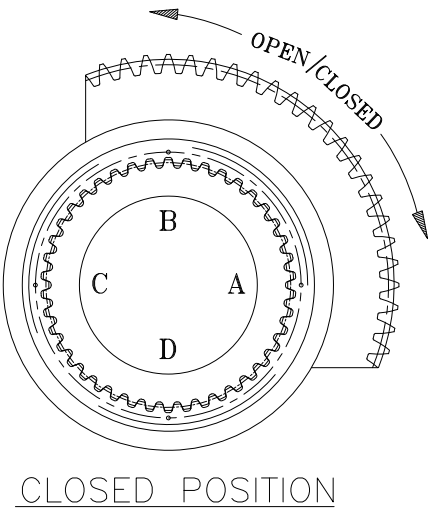

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
25"	127

REV.0

C921277A

9/16/19

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
71,170	1,571	147:1	45.3	±20°	36.8	201	Ø3-5/8" Key: 7/8" x 5/8"	2-7/8"	F19 & F25	FA19 & FA25



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

