

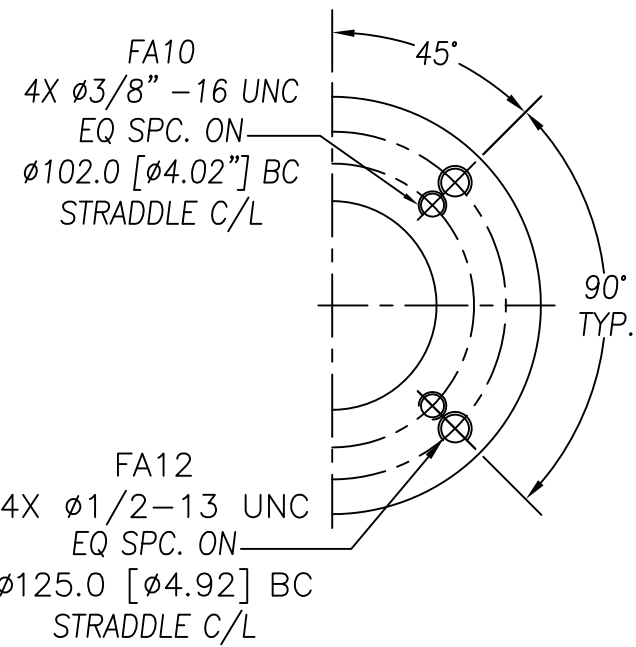
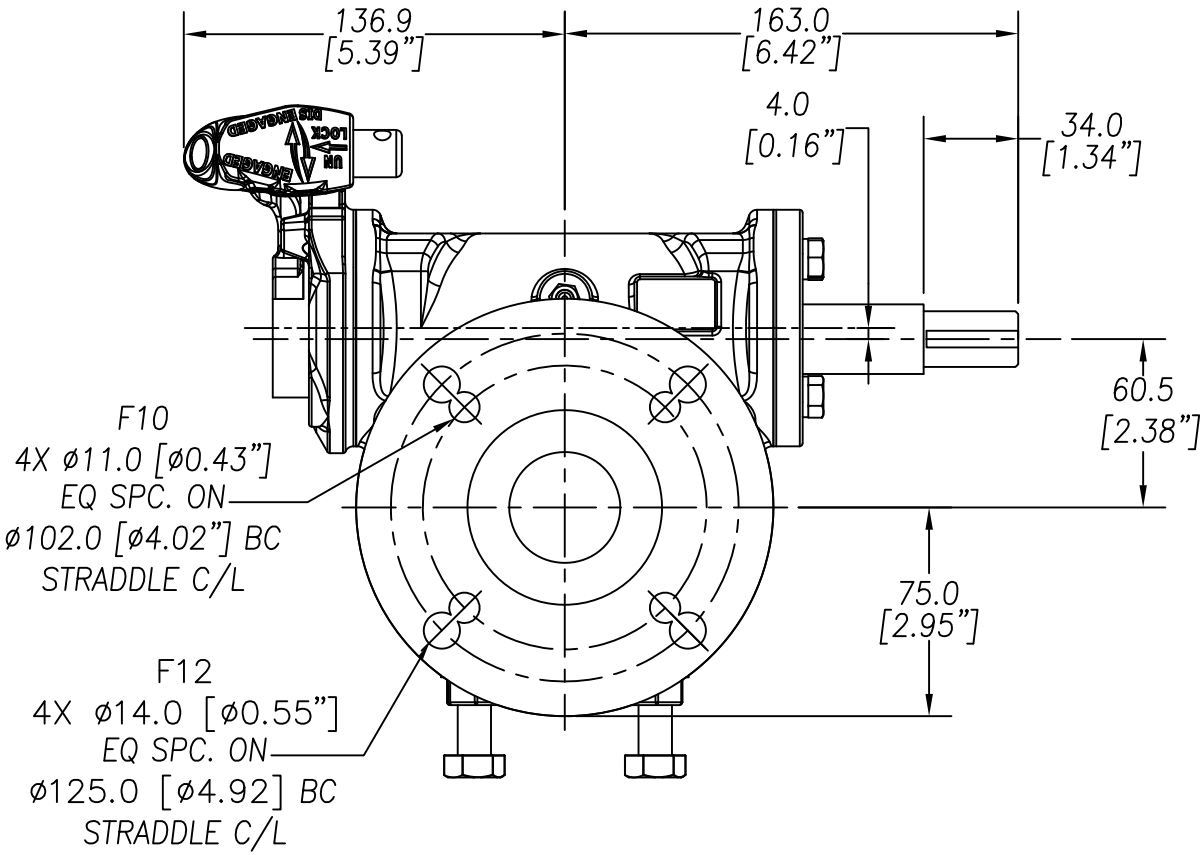
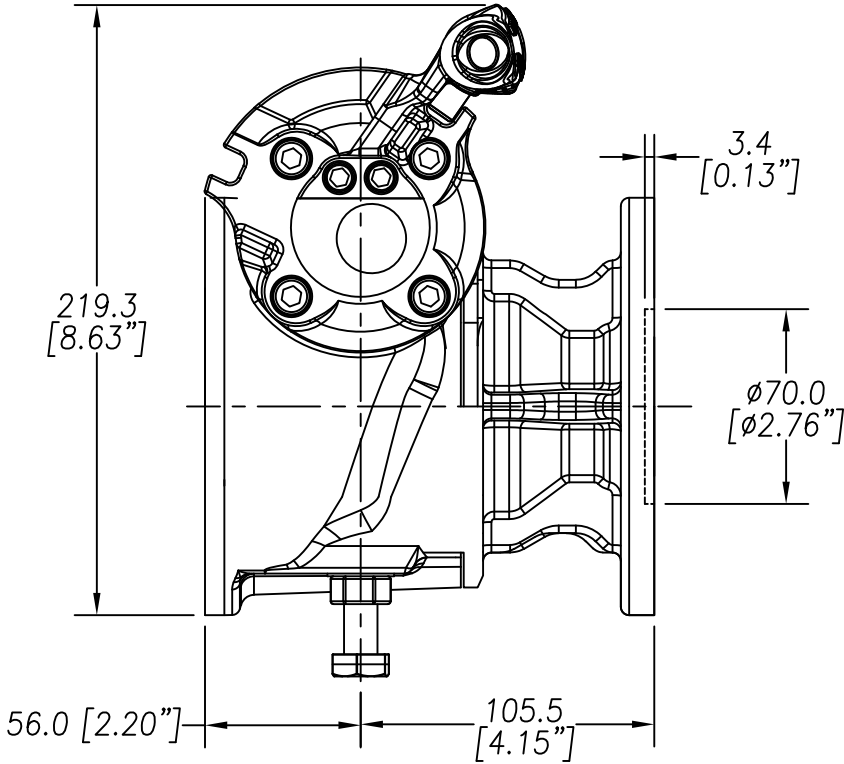


DIAMOND GEAR

7DW36

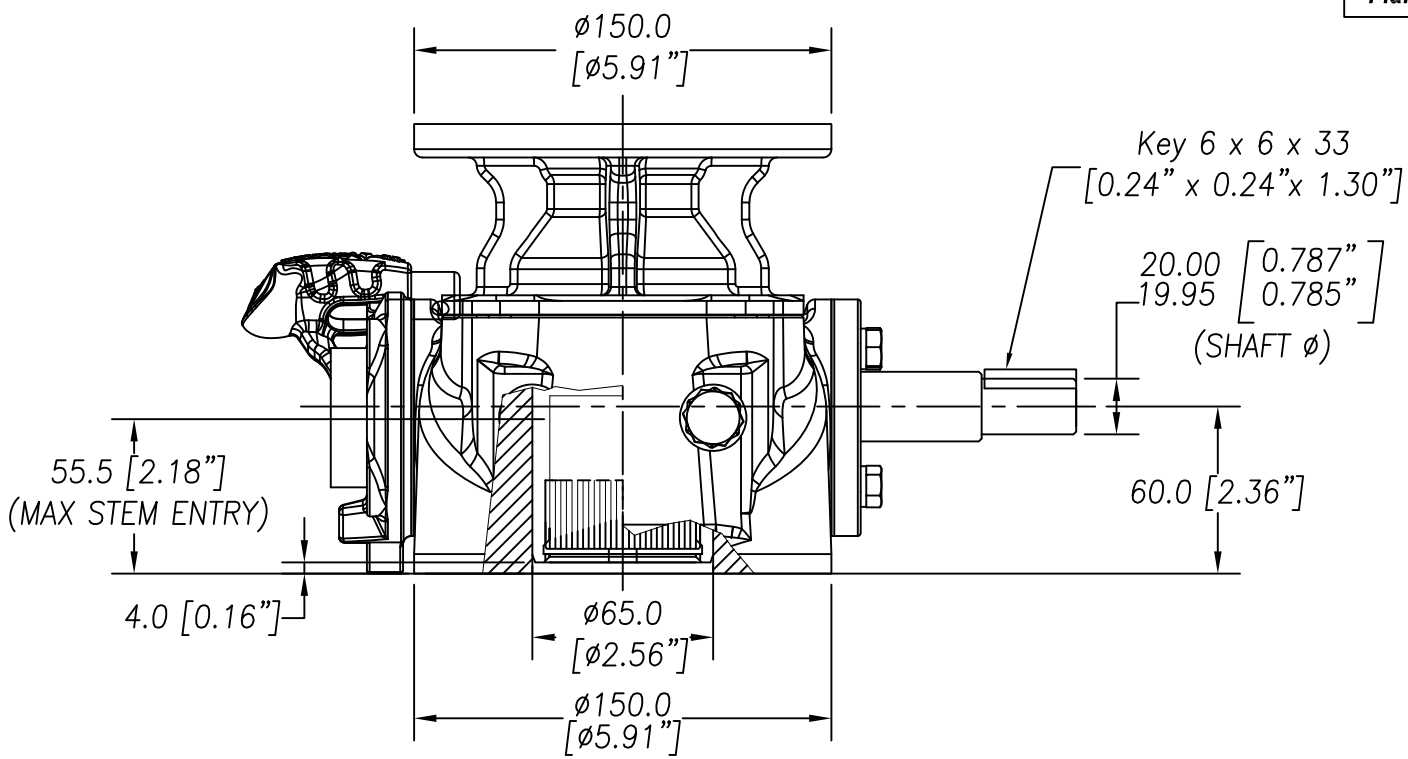

Standard Mounting Flange For Valve MSS FA10 & FA12

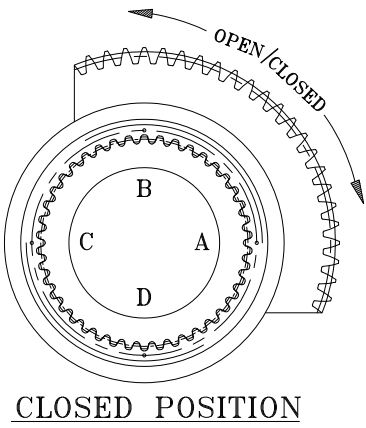

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
12"	94

REV.A

C921224A 9/24/19

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD ACTUATOR MOUNTING STRADDLE C/L	STANDARD VALVE MOUNTING STRADDLE C/L
6,982	554	36:1	12.6	±20°	9	33	$\phi 1-5/16$ " Key: 5/16" x 1/4"	1.0"	F10 & F12	FA10 & FA12



DIAOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270

