



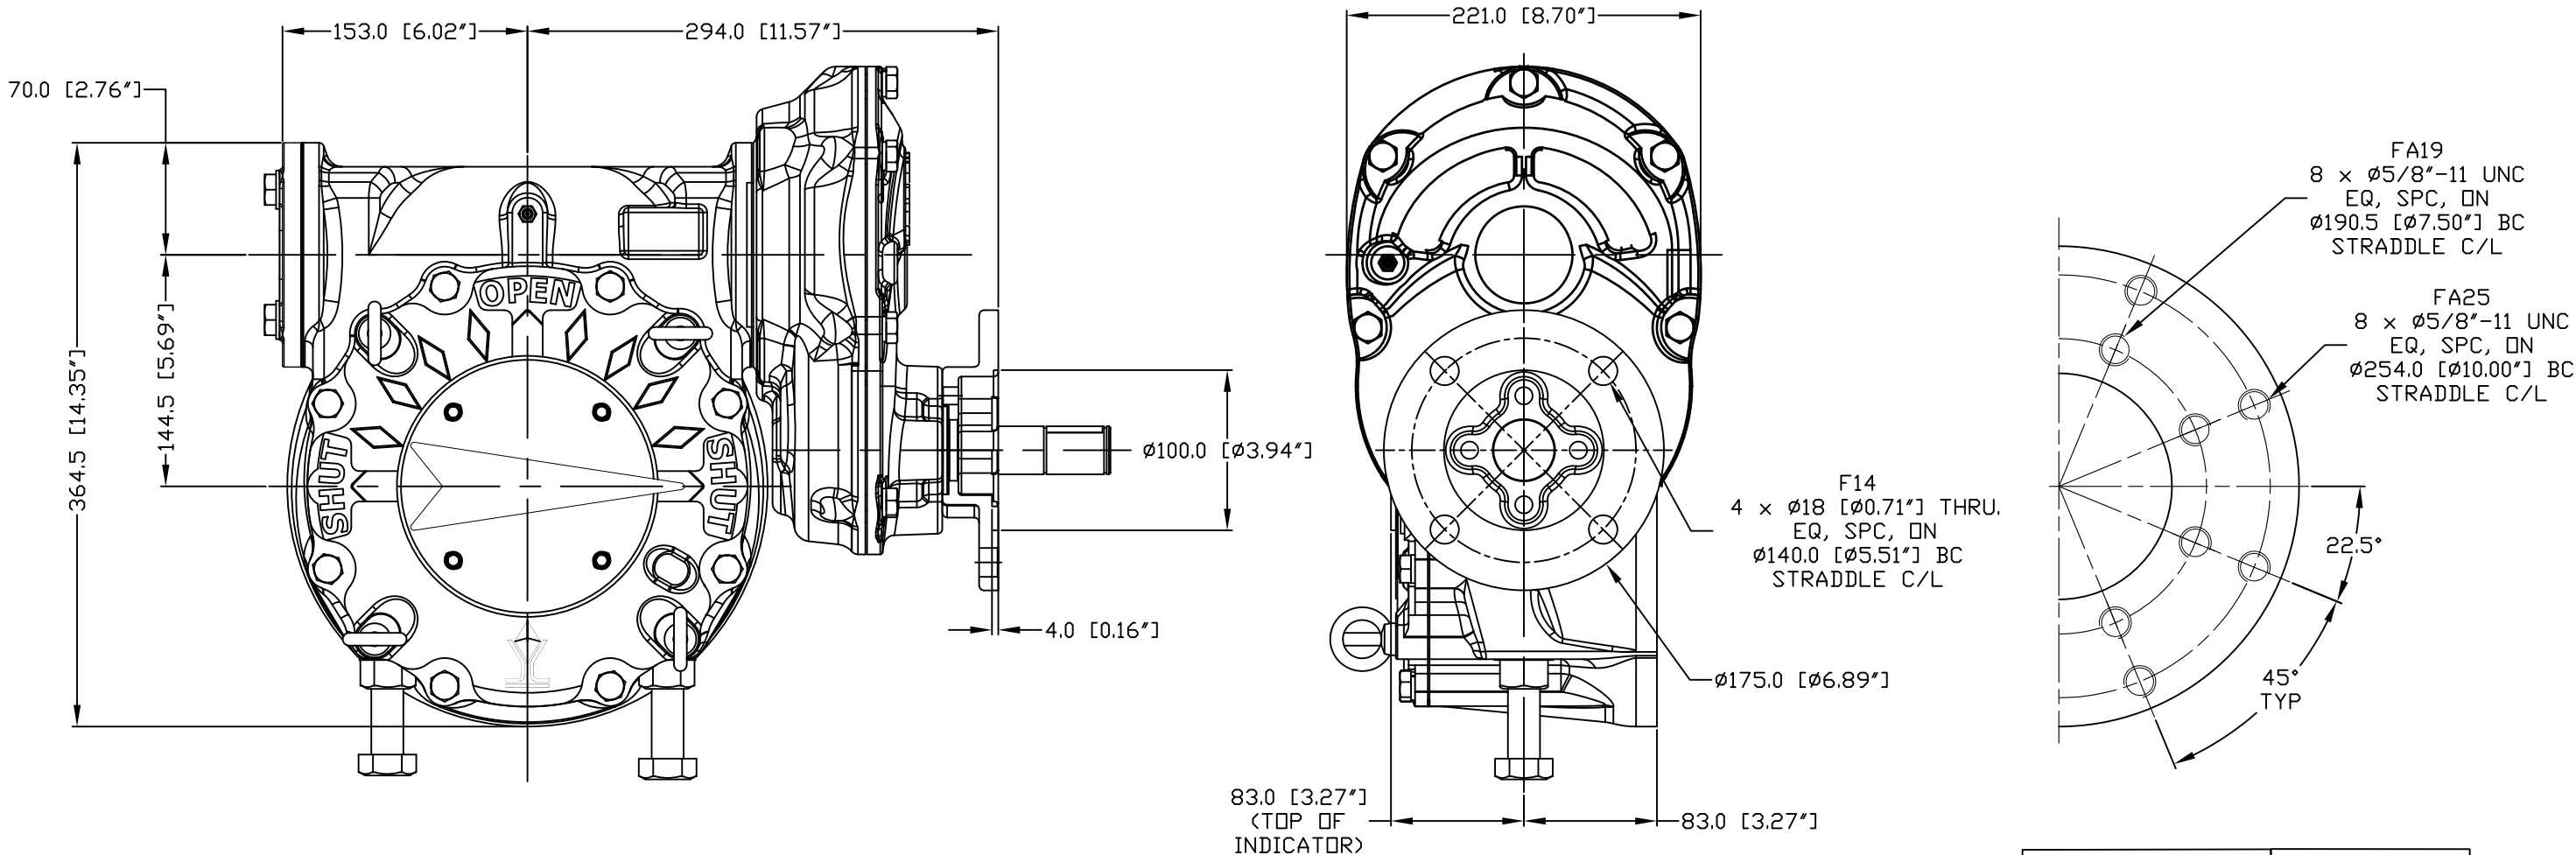

Standard Mounting Flange For Valve	MSS FA19 & FA25
---------------------------------------	--------------------

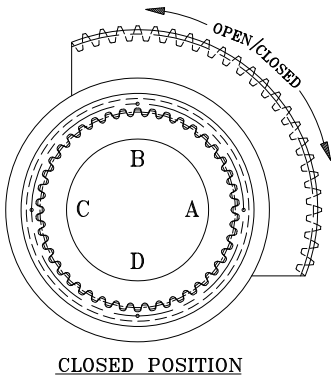

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
25"	125

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
80,360	1,554	168:1	51.7	±20°	42	159	ø3-5/8" Key: 7/8" x 5/8"	3.0"	FA19 & FA25



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921219A 12/17/2019

REV.B