

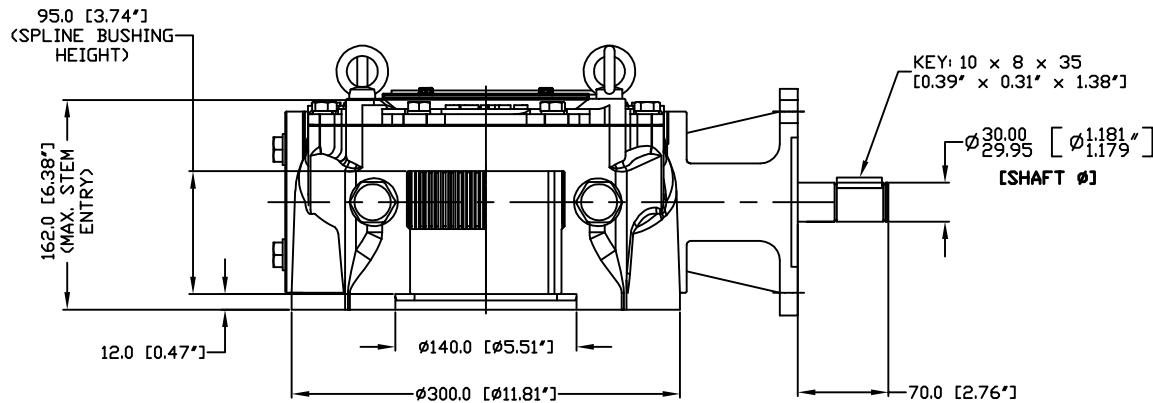
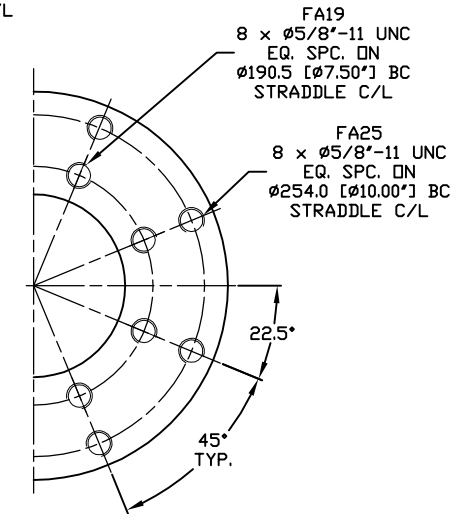
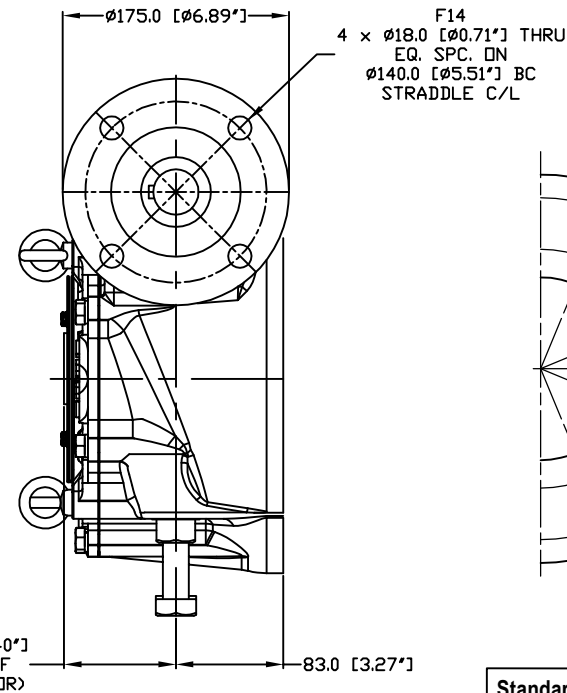


DIAMOND GEAR

80WG56-MFA

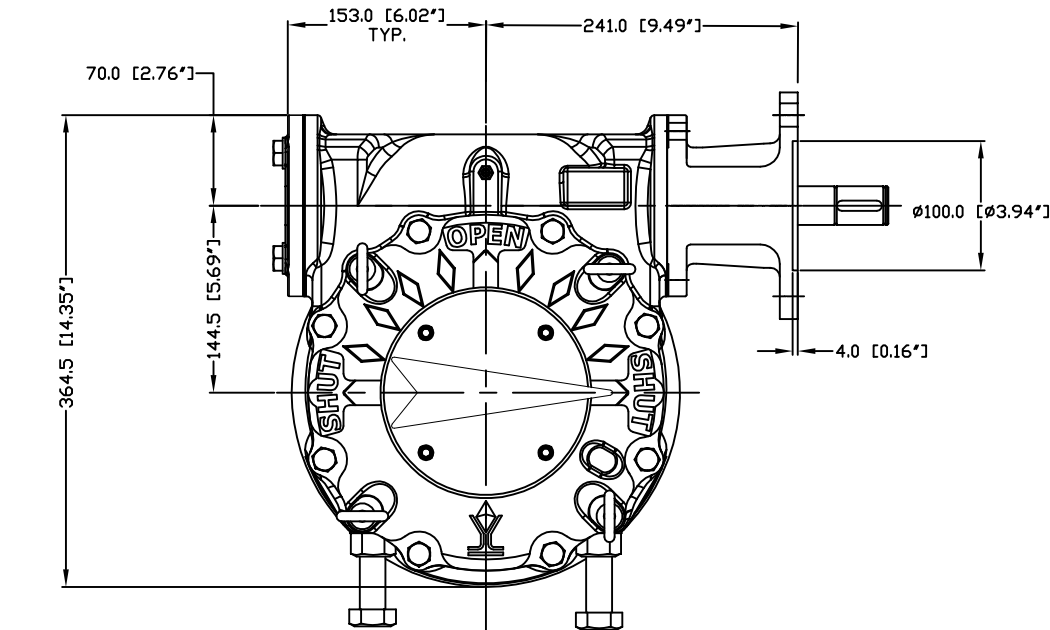

Standard Mounting Flange For Valve	MSS FA19 & FA25
---------------------------------------	--------------------



HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
25"	331

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
80,360	4,100	56:1	19.6	±20°	14	115	Ø3-5/8\"/> Key: 7/8\" x 5/8"	3.0"	FA19 & FA25

C921239A

REV.A

12/17/19



CNC FLOW CONTROL
HOUSTON, TEXAS, USA



PHONE: 713-466-1644, FAX: 713-466-1715