

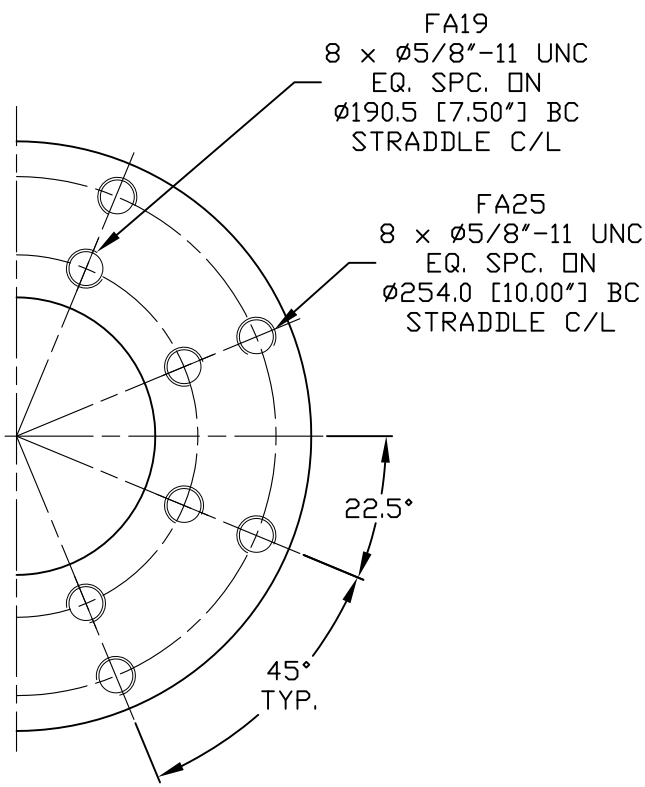
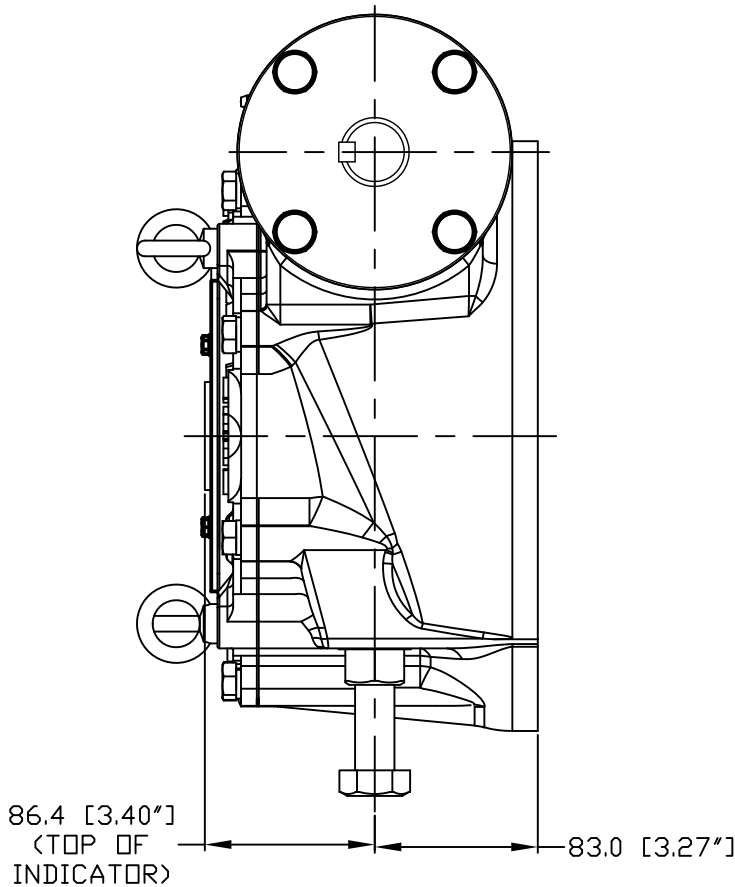
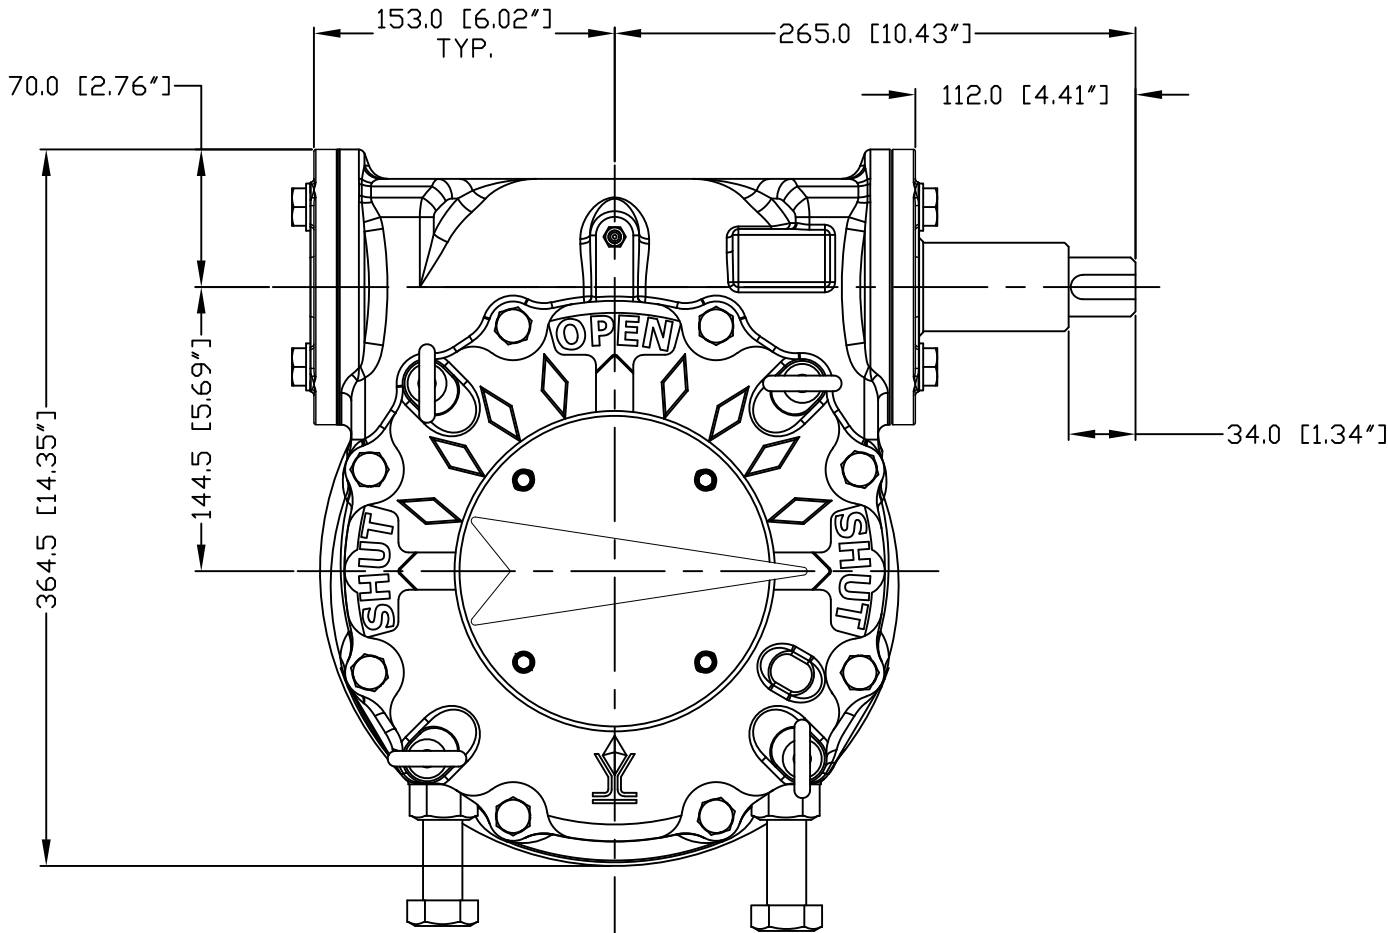


DIAMOND GEAR

80WG56

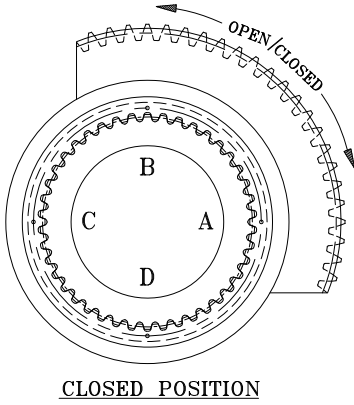

Standard Mounting Flange For Valve	MSS FA19 & FA25
---------------------------------------	--------------------

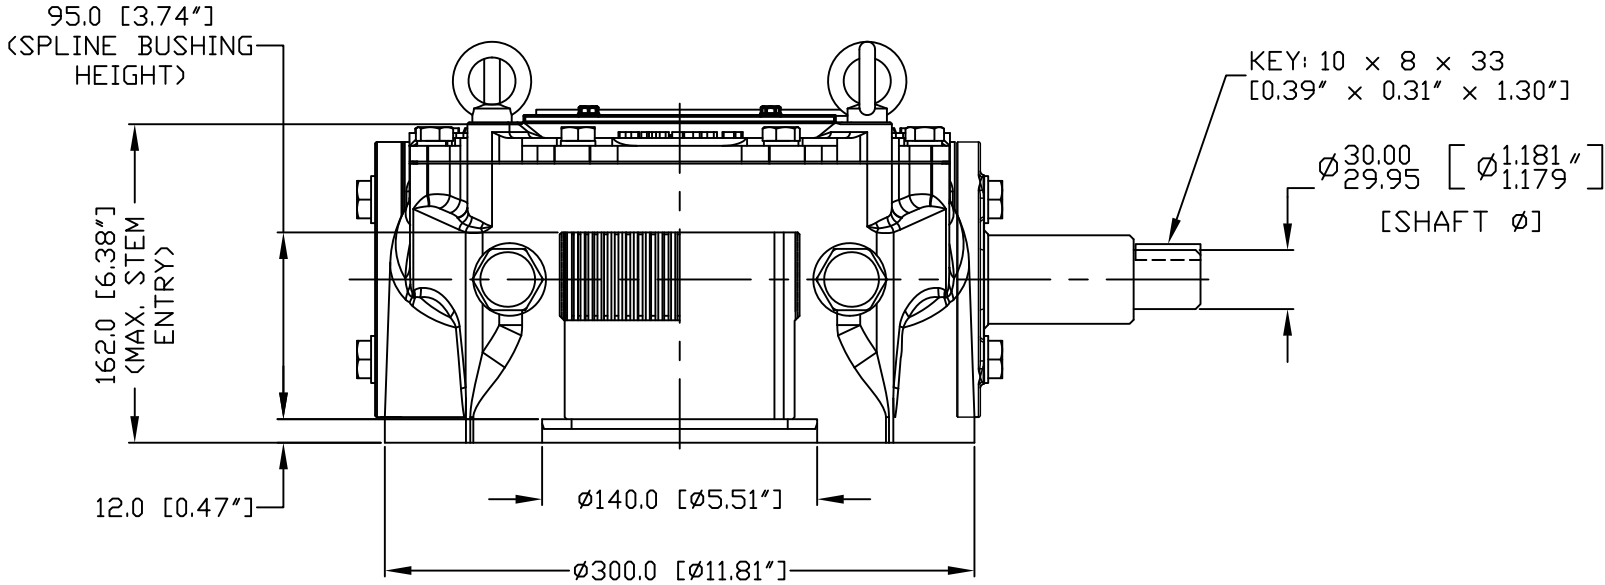

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
25"	331

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
80,360	4,100	56:1	19.6	±20°	14	110	$\phi 3-5/8"$ Key: 7/8" x 5/8"	3.0"	FA19 & FA25



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921218A	12/17/19
----------	----------

REV.A
