


DIAMOND GEAR

810WG1650

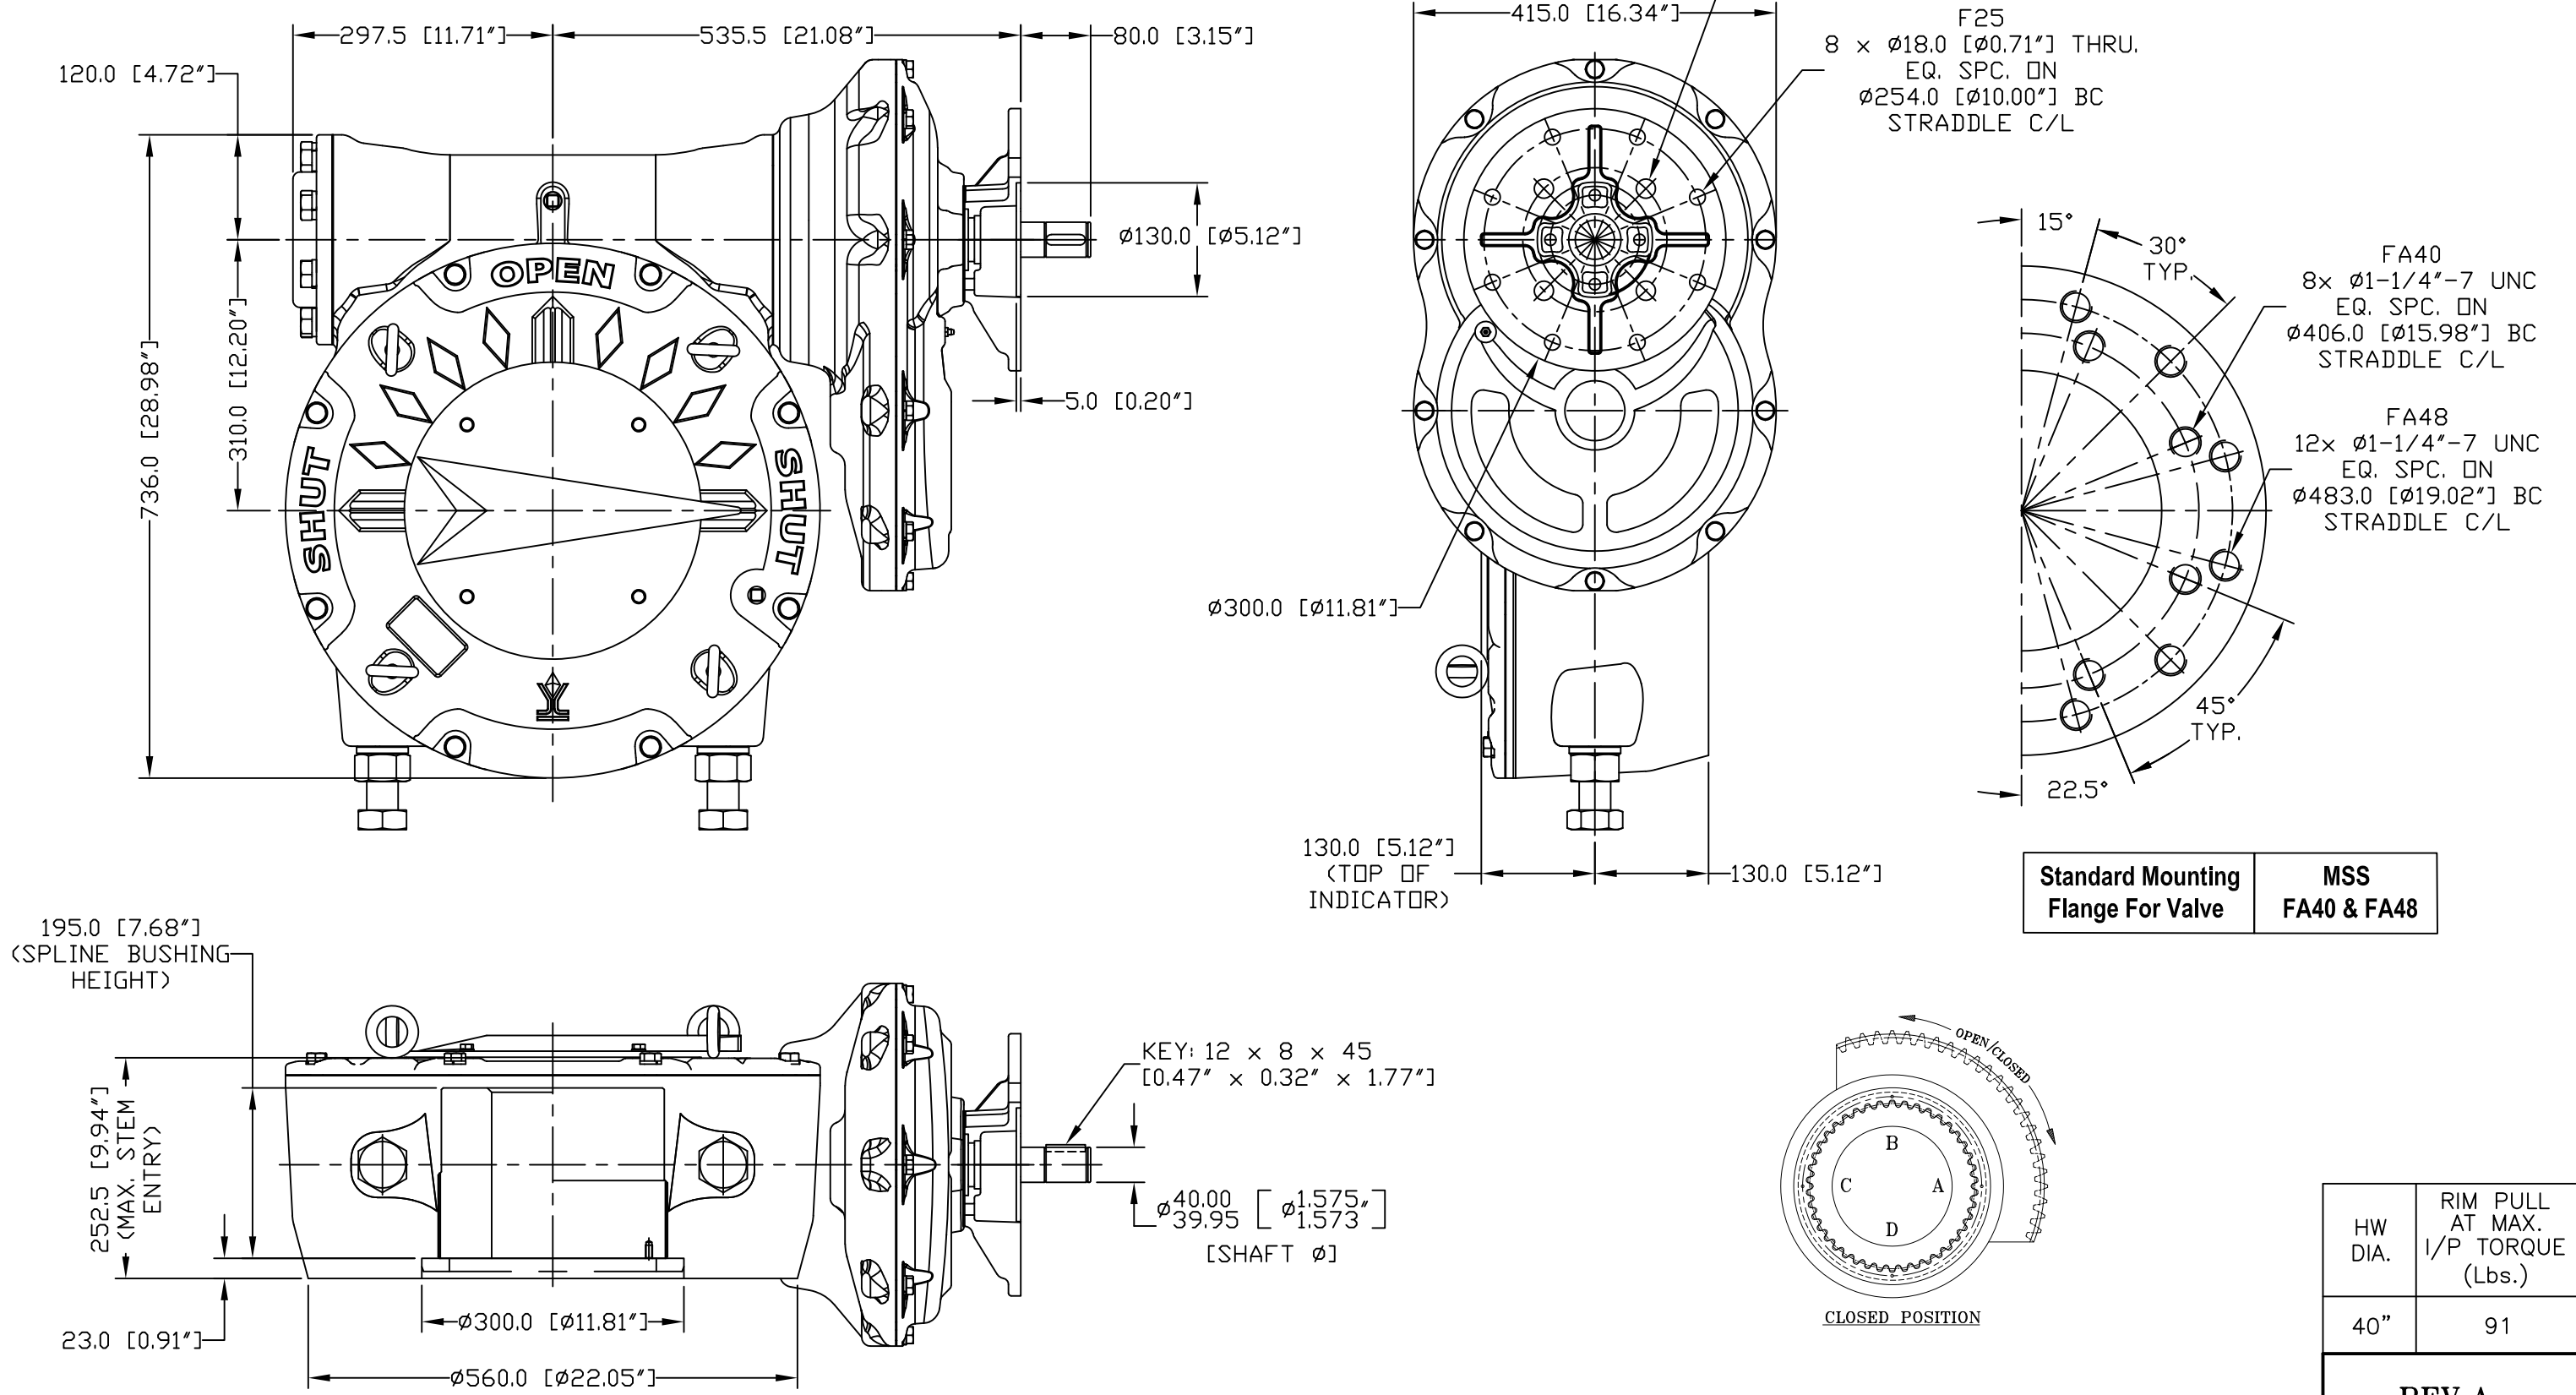

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
810,434	1,792	1650:1	447.2	±20°	412.5	930	ø7-1/2" Key: 1-3/4" x 1-1/2"	6-5/16"	FA40 & FA48



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
40"	91

REV.A

C921253A 12/17/19