
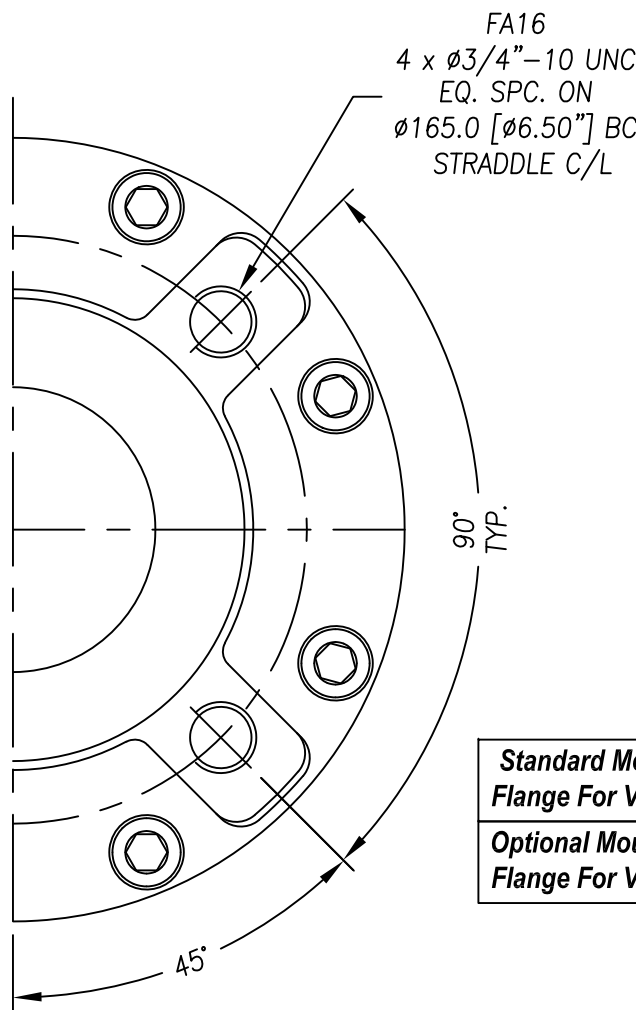
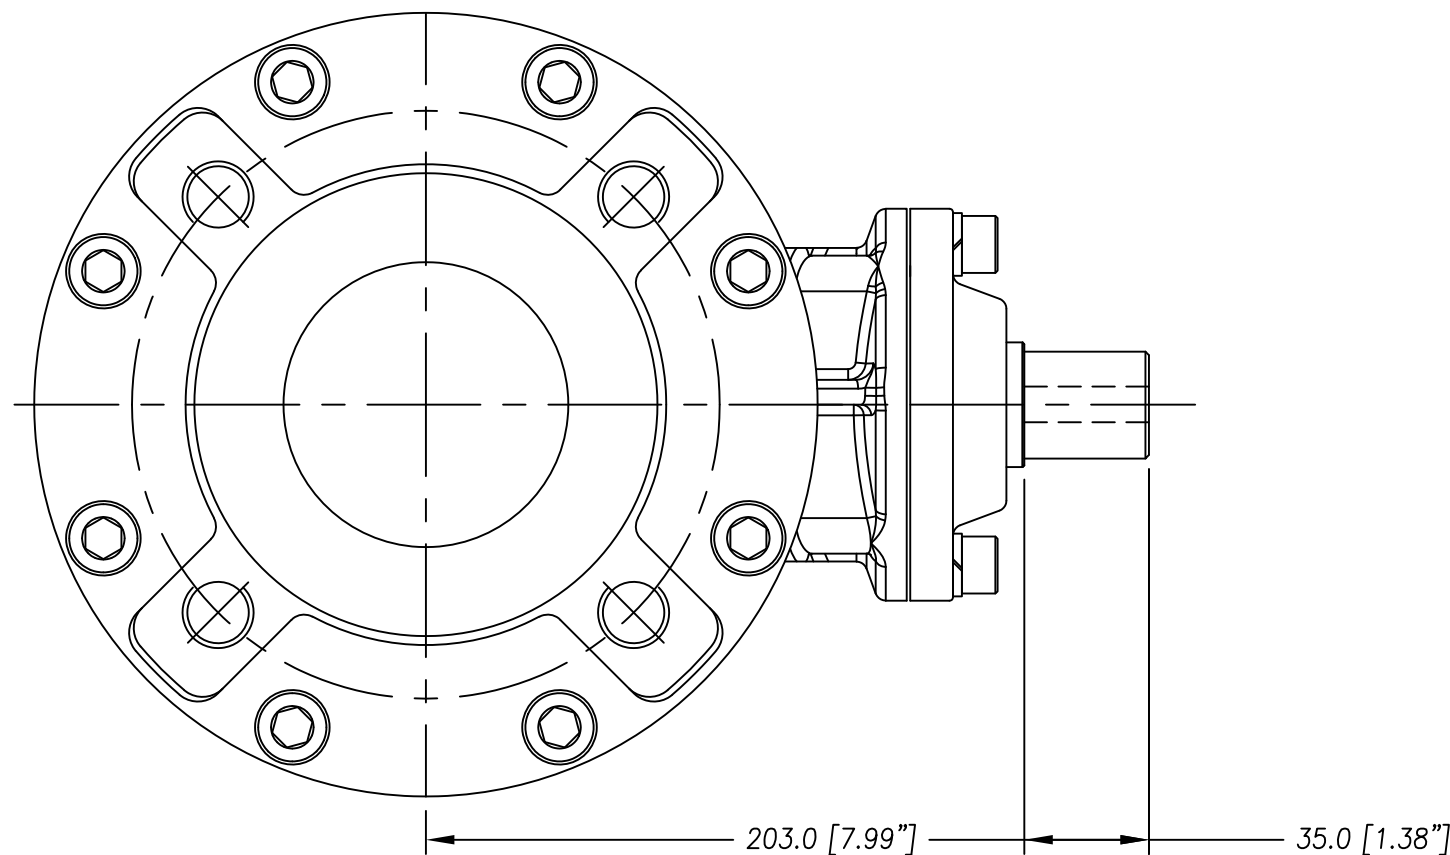
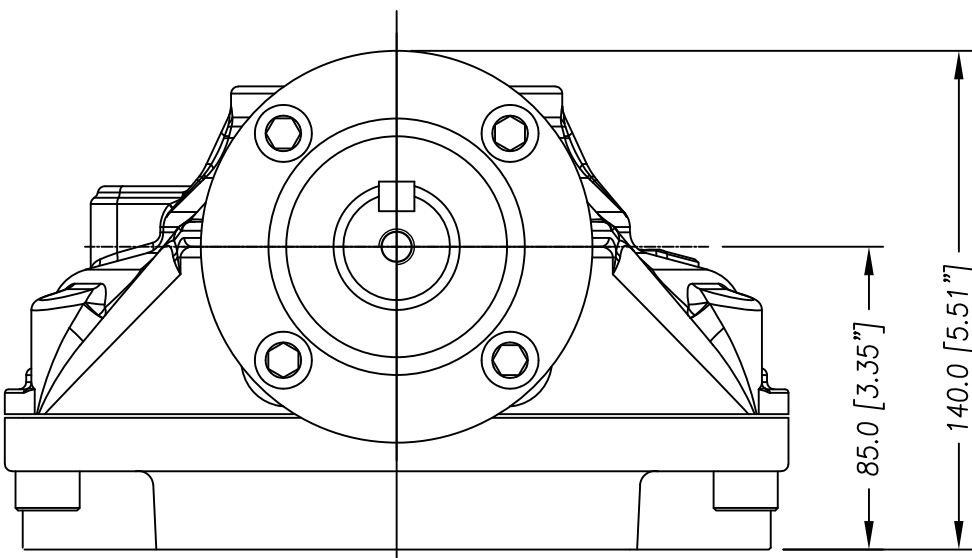


DIAMOND GEAR

9.2BG3.75

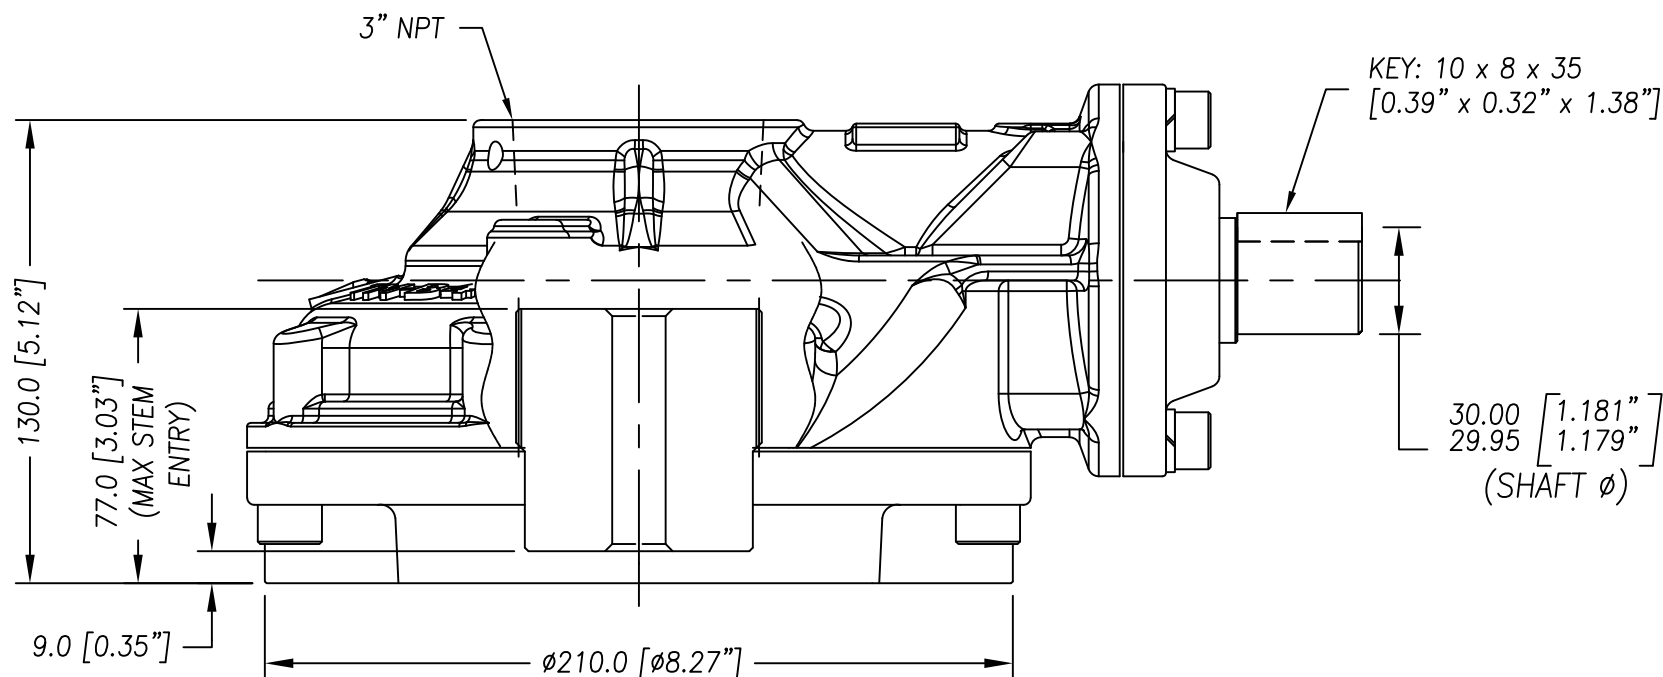

Standard Mounting Flange For Valve	MSS FA16
Optional Mounting Flange For Valve	MSS FA14

UNITS: MM [Inches]

MAX. OUTPUT TORQUE		MAX. INPUT TORQUE		RATIO	MECHANICAL ADVANTAGE	THRUST [LB]	WEIGHT [LB]	MAX ROUND BORE [IN.]	STANDARD MOUNTING STRADDLE C/L	OPTIONAL MOUNTING STRADDLE C/L
[FT.LB]	[IN.LB]	[FT.LB]	[IN.LB]							
772	9,258	227	2,723	3.75:1	3.4	31,725	55.1	Ø1-7/8" KEY: 1/2" X3/8"	FA16	FA14



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921260B

REV.A
07/30/21