

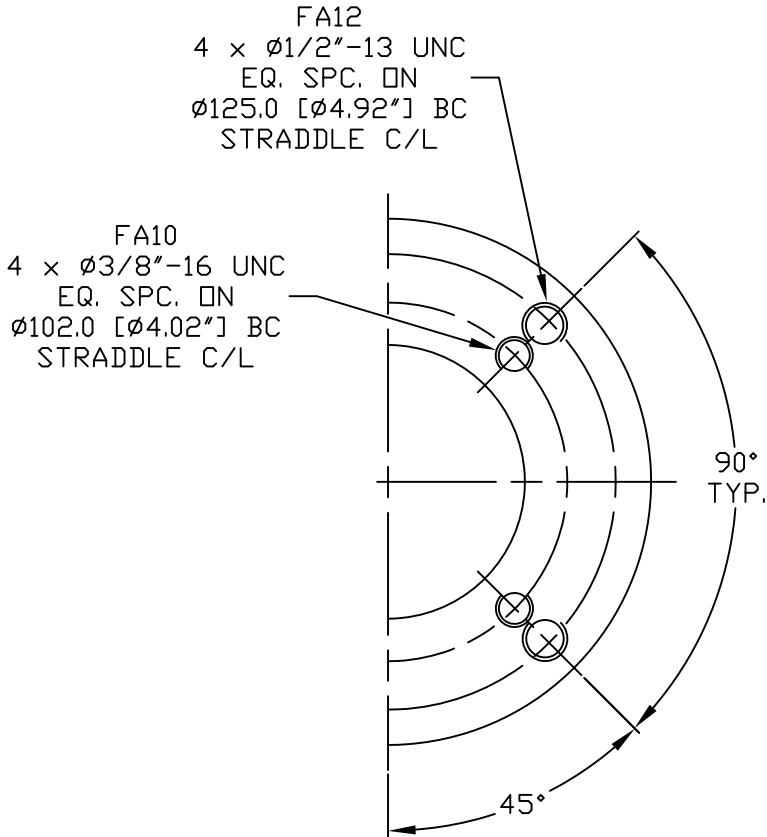
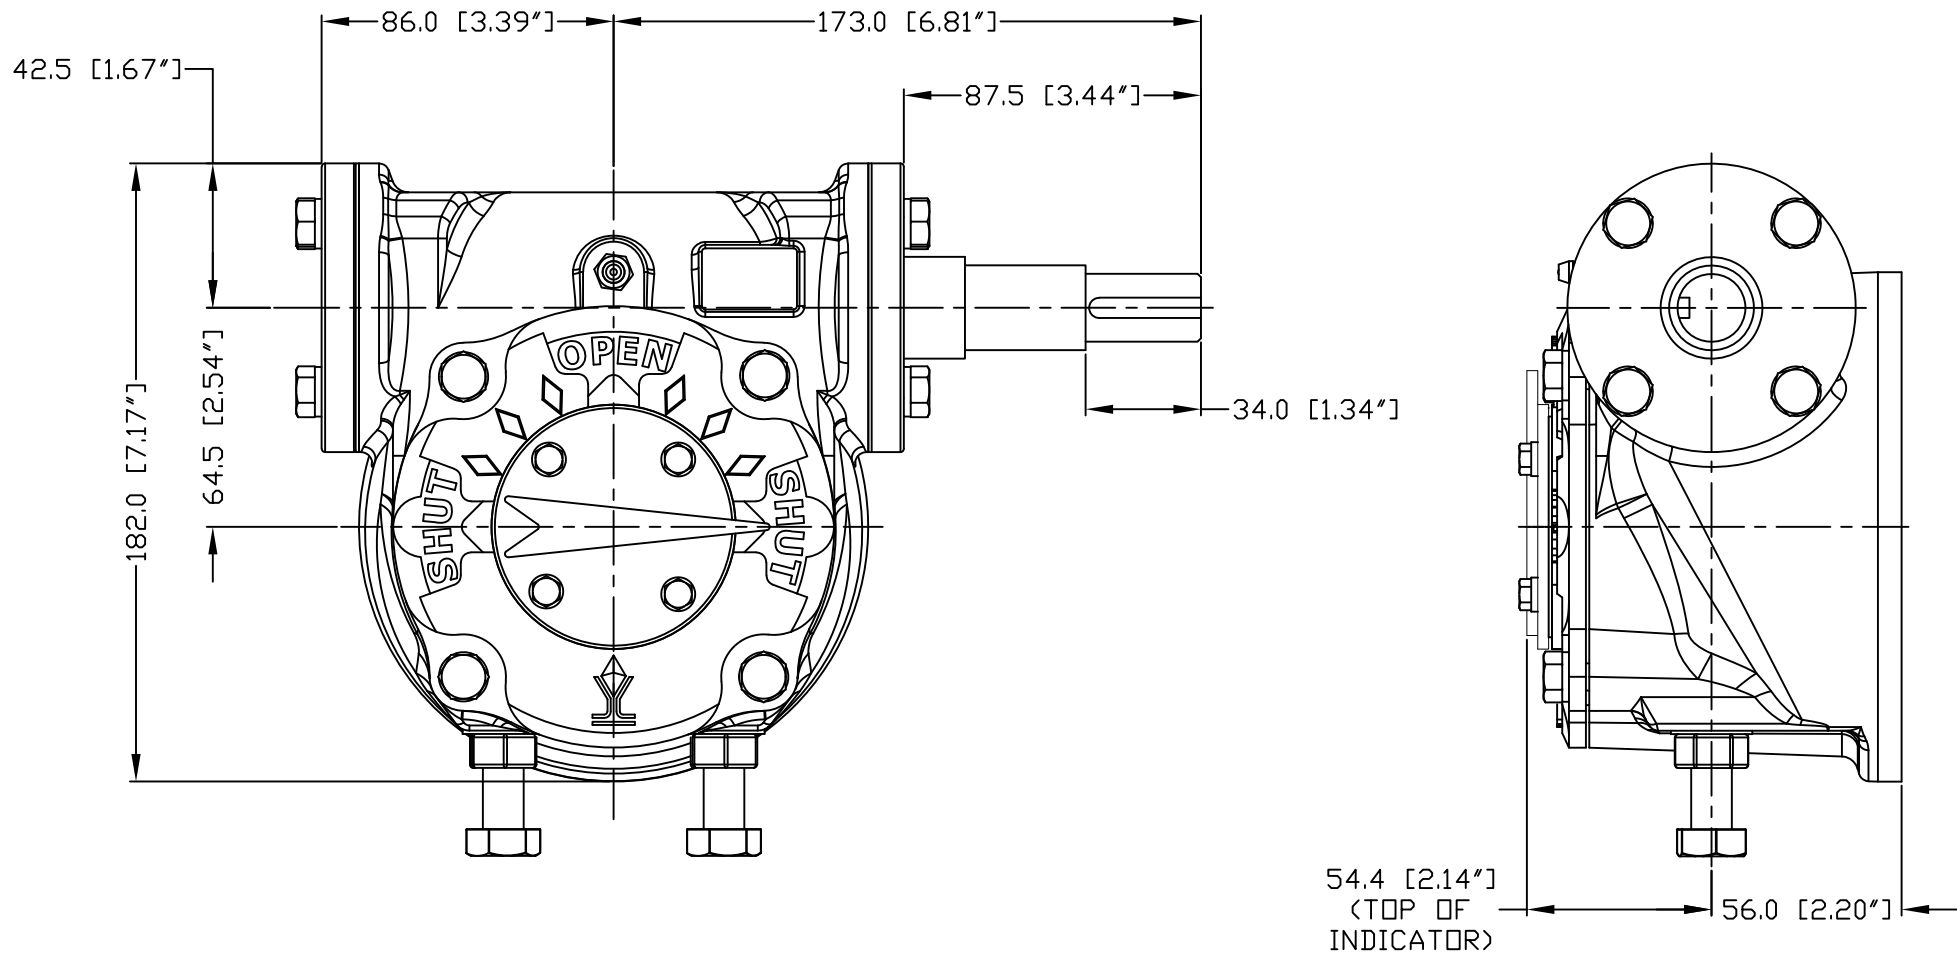


DIAMOND GEAR

9WG38

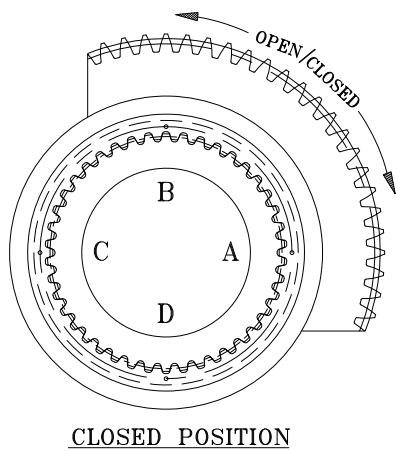

Standard Mounting Flange For Valve	MSS FA10 & FA12
---------------------------------------	--------------------

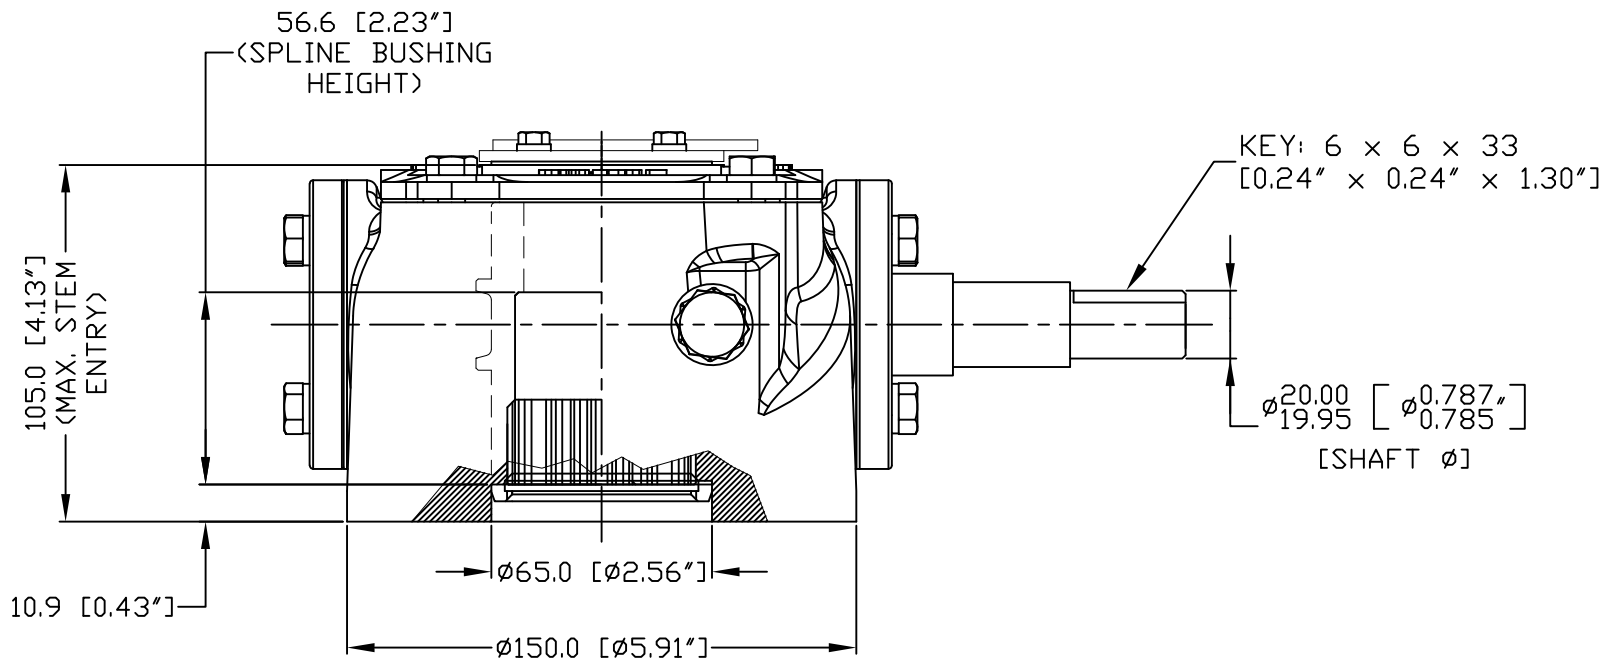

HW DIA.	RIM PULL AT MAX. I/P TORQUE (Lbs.)
12"	115

UNITS: MM [Inches]

MAX. OUTPUT TORQUE [IN.LB]	MAX. INPUT TORQUE [IN.LB]	RATIO	MECHANICAL ADVANTAGE	OUTPUT ANGULAR STROKE	TURN PER 90°	WEIGHT [LB]	MAX. ROUND BORE [IN.]	MAX. SQUARE BORE [IN.]	STANDARD MOUNTING STRADDLE C/L
9,019	678	38:1	13.3	$\pm 20^\circ$	9.5	24	$\phi 1-3/8$ " Key: $5/16$ " x $1/4$ "	1-1/8"	FA10 & FA12



DIAMOND GEAR
HOUSTON, TEXAS, USA
PHONE: 713-590-0270



C921214A

12/17/19

REV.A